

WINDMERE™

GLAZED CERAMIC FLOOR, WALL & MOSAIC

AMERICAN OLEAN®

FINISHES: MATTE

USAGE



FLOOR



WALL



COUNTERTOP



SHOWER FLOOR



EXTERIOR FLOOR

MATERIAL



PRICING



SPECIAL FEATURES



STEPWISE™



TRUEEDGE™



MADE IN THE U.S.A.



LARGE FORMAT



MOSAIC/DECO



ENCAUSTIC



TERRAZZO




PAVER



CUSTOMIZE

CONCRETE LOOK

FLOOR TILE

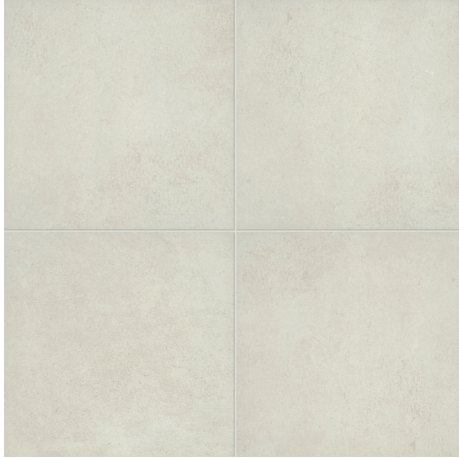

SCOTTISH WHITE WI01



ENGLISH GREY WI03

WALL TILE



SCOTTISH WHITE WI01




ENGLISH GREY WI03

MOSAIC



SCOTTISH WHITE WI01

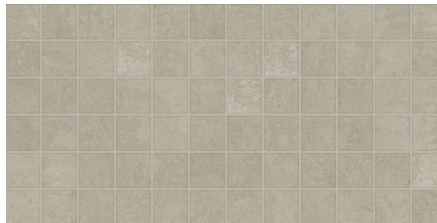

ENGLISH GREY WI03

JOLLY TRIM



SCOTTISH WHITE WI01



ENGLISH GREY WI03



SLIP RESISTANT



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT



FIRE-RESISTANT



SIMPLICLEAN™

VISIT AMERICANOLEAN.COM/WHYTILE FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

FINISHES: MATTE

USAGE




MATERIAL



PRICING



SPECIAL FEATURES



CONCRETE LOOK

SIZES

			THICKNESS	SQ. FT./ CARTON	PIECES/ CARTON
	18 x 18 Floor Tile	17-11/16" x 17-11/16" (45.01 cm x 45.01 cm)	5/16"	17.44	8
	12 x 24 Floor Tile	11-9/16" x 23-3/8" (29.40 cm x 59.30 cm)	3/8"	15.04	8
	12 x 12 Floor Tile	11-13/16" x 11-13/16" (30.00 cm x 30.00 cm)	5/16"	15.52	16
	10 x 14 Wall Tile	9-13/16" x 13-15/16" (24.99 cm x 35.40 cm)	5/16"	14.25	15
	4 x 12 Wall Tile	4-1/4" x 12-7/8" (10.91 cm x 32.77 cm)	5/16"	10.64	28
	2 x 2 Mosaic (Dot-mounted)	12" x 24" Sheet (30.48 cm x 60.96 cm Sheet)	1/4"	24.00	12

INSTALLATION & PRICING

Grout Joint Recommendation	Shade Variation
Floor: 3/16" (Overlap should not exceed 33% when installing tile with a length 15" or greater in a staggered brick-joint pattern.) Wall: 10x14: 1/16" 4x12: 1/16" (When rectangular size is installed in a staggered brick-joint pattern, overlap should not exceed 33%.) Mosaic: 1/8"	 MEDIUM (V2)

PERFORMANCE CHARACTERISTICS

	ASTM#	FLOOR RESULT	WALL RESULT	MOSAIC RESULT
Water Absorption	C373	< 7.0%	< 20.0%	< 3.0%
Breaking Strength	C648	> 250 lbs.	120 - 230 lbs.	> 250 lbs.
Scratch Hardness	MOHS	7.0	4.0 - 6.0	7.0
Chemical Resistance	C650	Resistant	Resistant	Resistant

For additional information on test results, visit us at: americanolean.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance		
1 Residential Bathrooms	③	All Residential / Light Commercial
2 All Residential Areas	4	All Residential / Commercial

FEATURES

POST-CONSUMER
RECYCLED MATERIALSPRE-CONSUMER
RECYCLED MATERIALS

REVEAL IMAGING®



ZEROTOX

Healthy Homes | Healthy Planet

All or select items within this series meet the requirements for these qualifications.
For more information visit americanolean.com.

TRIM

			NUMBER	PIECES/ CARTON
	Floor Bullnose	3 x 12	P43C9	22
	Wall Bullnose	3 x 10	S4310	54
	Wall Bullnose Corner	3 x 3	SN4310	32
	Quarter Round	1 x 6	A106	152
	Quarter Round Corner	1 x 1	UC106	40
	Jolly	1/2 x 12	S1/212J	12

APPLICATIONS

	TARGET DCOF WET	SUITABLE
Dry & Level – Interior Floor	N/A	●*
Wet & Level – Interior Floor	≥ 0.42	●*
Shower Floors (Residential or Light Commercial)	≥ 0.42	●**
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	●
Countertops	N/A	●*
Pool Linings	N/A	●**

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit americanolean.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

* Floor and Mosaic tile only.

** Mosaic tile only.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: americanolean.com/Factors.Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to americanolean.com/LargeTiles for more information.