

BRICKTOWN™
PAVER

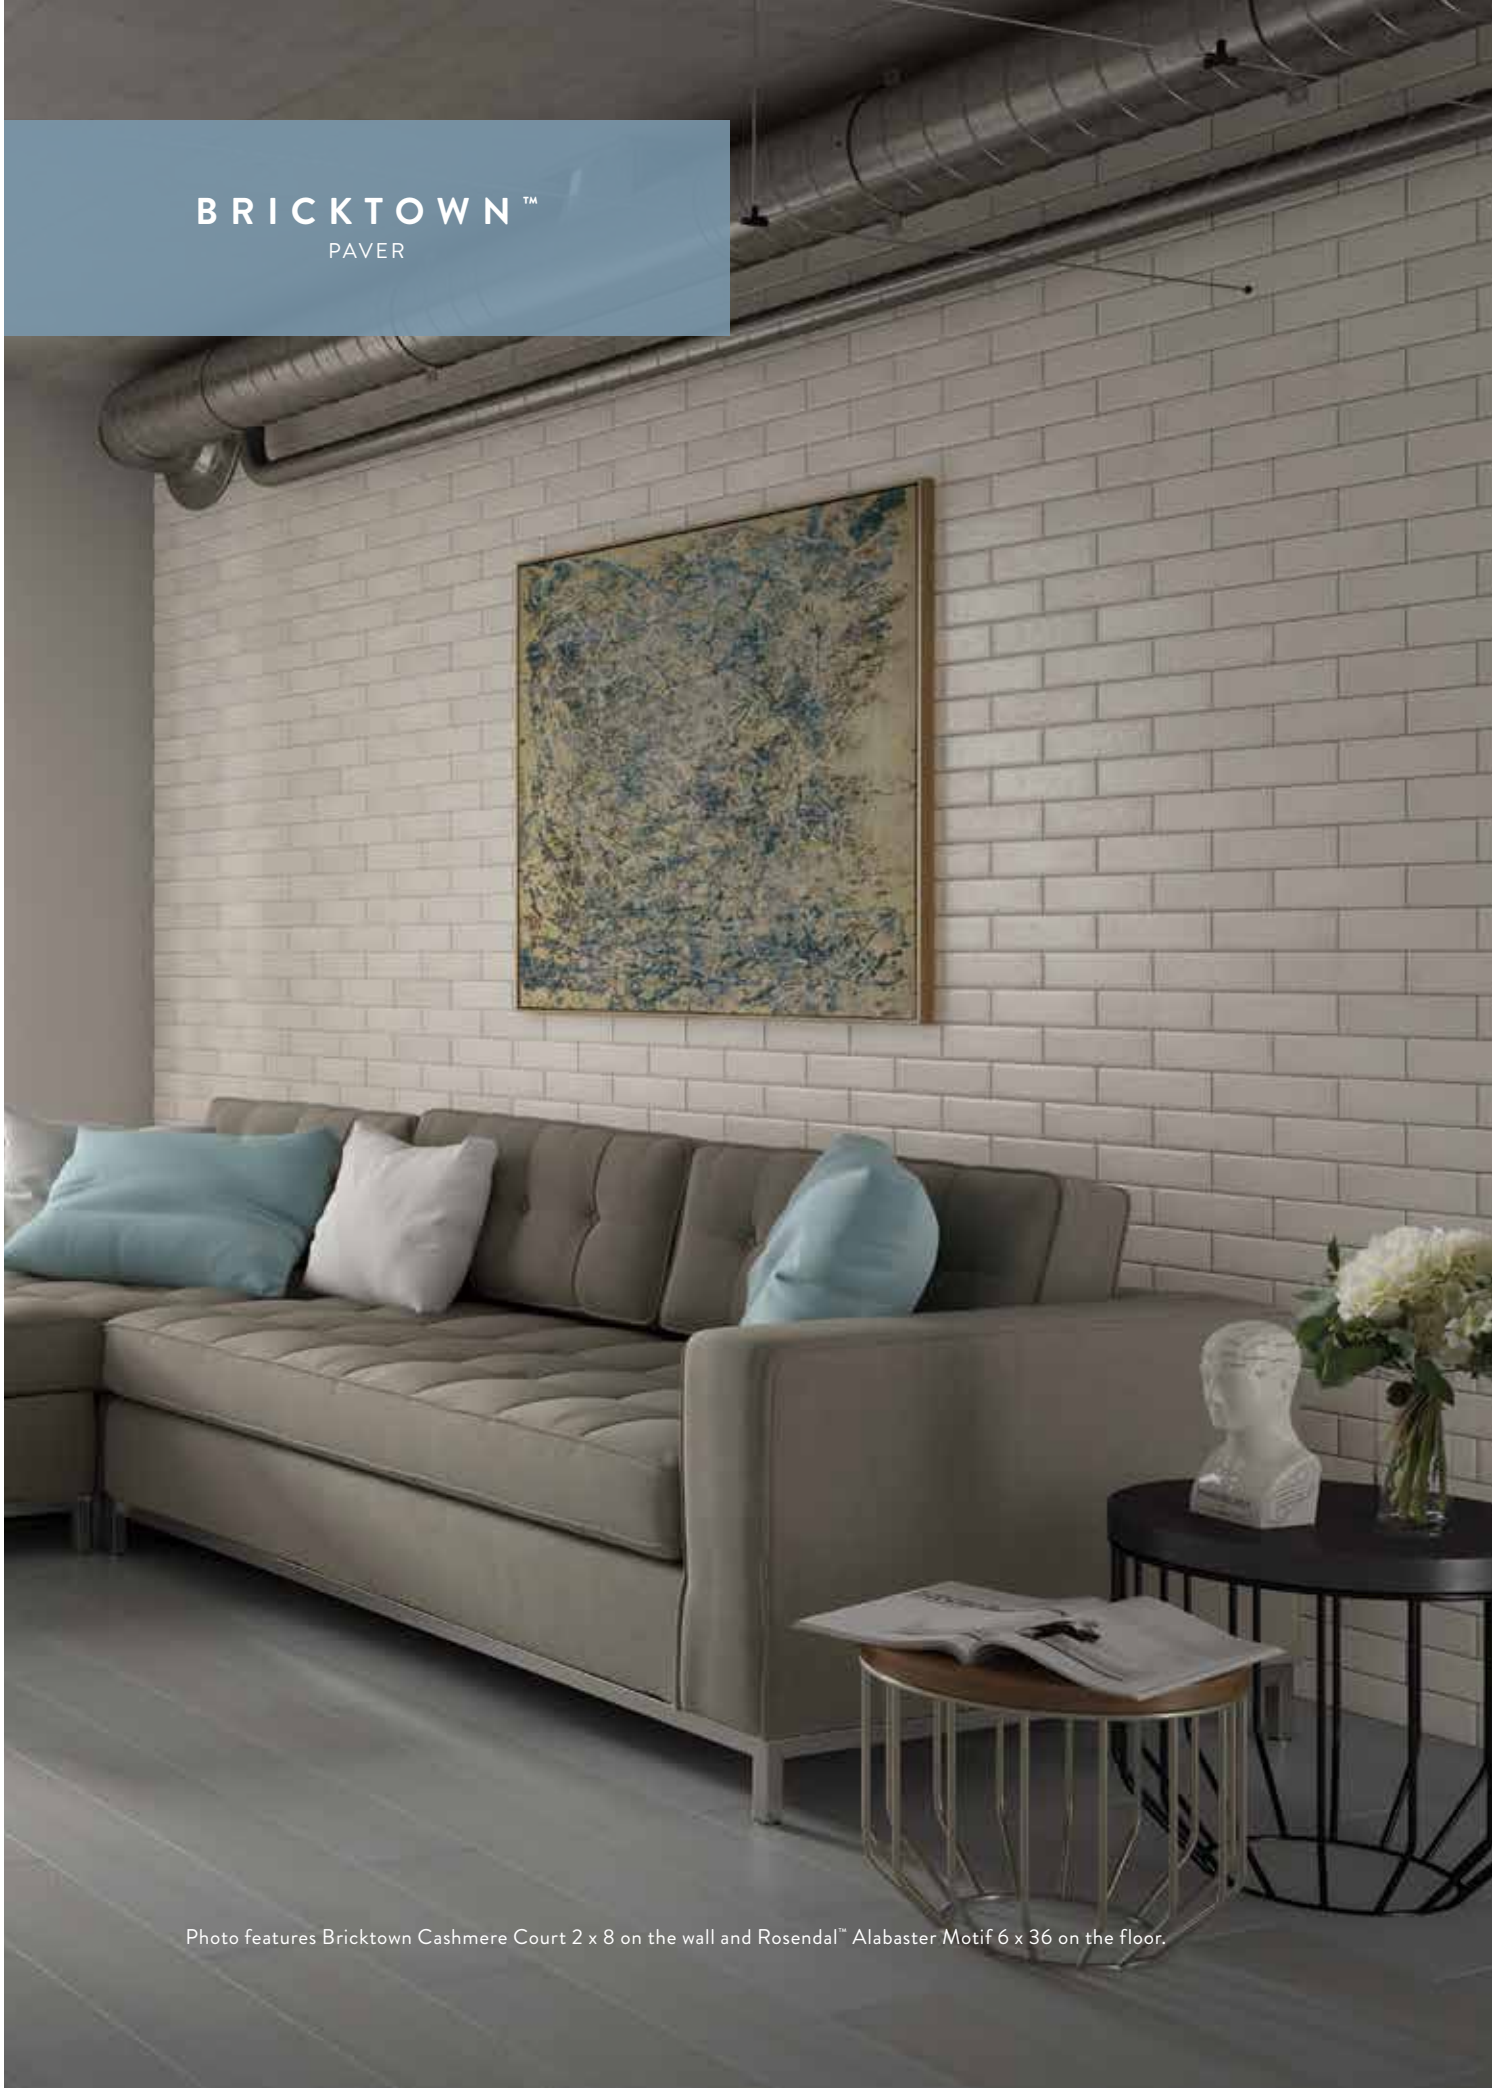


Photo features Bricktown Cashmere Court 2 x 8 on the wall and Rosendal™ Alabaster Motif 6 x 36 on the floor.

BRICKTOWN™ PAVER TILE WITH REVEAL IMAGING®

Inspired by the vintage look of painted brick, Bricktown™ by American Olean® provides a familiar, inviting aesthetic to both walls and floors. The inherently warm appeal and versatile style of brick creates a timeless design that is both modern and minimal. Bricktown highlights this classic look by offering a contemporary variation to traditional brick in neutral tones that complement a variety of textures and settings.

BRICKTOWN™

PAVER FLOOR TILE



ARCTIC BLEND BT07



FAWN TERRACE BT08



CASHMERE COURT BT10



GREIGE PARKWAY BT09



CHESTNUT BOULEVARD BT11



ONYX CROSSING BT12





All or select items within this series meet the requirements for these qualifications. For more information visit americanolean.com.



Photo features Bricktown™ Cashmere Court 2 x 8 on the wall.

SIZES

			THICKNESS	SQ. FT./ CARTON	PIECES/ CARTON
	4 x 8 Floor Tile	3-7/8" x 8" (9.80 cm x 20.30 cm)	7/16"	7.92	36
	2 x 8 Floor Tile	2-1/4" x 8" (5.70 cm x 20.30 cm)	7/16"	6.24	48

INSTALLATION & PRICING

RECOMMENDED GROUT JOINT:
Floor: 3/8"
RELATIVE PRICING: Medium

SHADE VARIATION



PERFORMANCE CHARACTERISTICS

	ASTM#	FLOOR RESULT
Water Absorption	C373	< 3.0%
Breaking Strength	C648	> 400 lbs.
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant
Abrasion Resistance	C1027	N/A

For additional information on test results, visit us at: americanolean.com/information/TestResults.

USAGE

FLOORS	WALLS	COUNTERTOPS
F	W	C

APPLICATIONS

	TARGET DCOF WET	SUITABLE
Dry & Level – Interior Floor	N/A	●
Wet & Level – Interior Floor	≥ 0.42	●
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	●
Countertops	N/A	●
Pool Linings	N/A	●

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit americanolean.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications in freezing and non-freezing climates, when proper installation methods are followed.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: americanolean.com/Factors.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface.

It is necessary to follow the proper procedures and recommendations from the grout and maintenance products' manufacturers.



All or select items within this series meet the requirements for these qualifications. For more information visit americanolean.com.