

# COLOR STORY™ FLOOR

COLOR STORY™ COLLECTION - COLORBODY™ PORCELAIN

AMERICAN OLEAN®



CONCRETE LOOK



AMERICAN OLEAN®  
PROVEN IN TILE™



# COLOR STORY™ FLOOR

Make a splash with Color Story™ Floor, a fresh take on our signature Color Story™ collection. This contemporary concrete look is available in deep saturated solid hues as well as neutrals, each with a complementary terrazzo look. Your creative design solution has arrived. Mix and match colors or let the terrazzo look take center stage with Color Story Floor.

Cover photo features Color Story™ Floor Sapphire Sky & Shadow 12 x 12 matte on the floor and Stable Speckle 12 x 24 matte on the back wall.  
Above photo features Color Story™ Floor Storm Grey Speckle 12 x 24 matte on the floor and Color Story™ Wall Black 3 x 6 glossy on the wall.

# COLOR STORY™ FLOOR

COLOR STORY™ COLLECTION - COLORBODY™ PORCELAIN

AMERICAN OLEAN®

FINISHES: MATTE

## USAGE



## MATERIAL



## PRICING




## SPECIAL FEATURES



NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

CONCRETE LOOK

## FLOOR TILE




MATTE DESIGNER WHITE 0061




MATTE STABLE 0052




MATTE BALANCE 0034

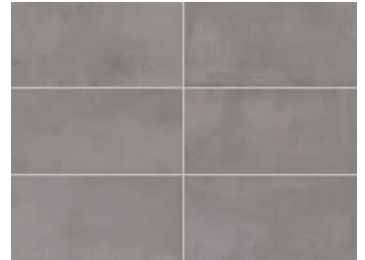


MATTE STORM GRAY 0017




DESIGNER WHITE SPECKLE T061




STABLE SPECKLE T052




BALANCE SPECKLE T034

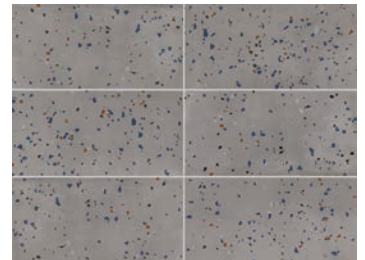


STORM GRAY SPECKLE T017




MATTE PASSION 0021



MATTE TRANQUILITY 0073



MATTE SAPPHIRE SKY 0072

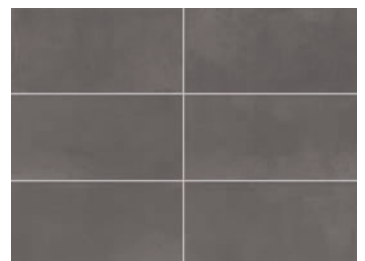

MATTE SHADOW 0016



SLIP RESISTANT



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT



FIRE-RESISTANT



CLIMATEPRO™



SIMPLICLEAN™

VISIT [AMERICANOLEAN.COM/WHYTILE](http://AMERICANOLEAN.COM/WHYTILE) FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

# COLOR STORY™ FLOOR

COLOR STORY™ COLLECTION - COLORBODY™ PORCELAIN

AMERICAN OLEAN®

FINISHES: MATTE

## USAGE




## MATERIAL



## PRICING



## SPECIAL FEATURES



NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

CONCRETE LOOK

## SIZES

			THICKNESS	SQ. FT./ CARTON	PIECES/ CARTON
	12 x 24 Floor Tile	11-7/8" x 23-5/8" (30.23 cm x 60.12 cm)	5/16"	17.60	9
	12 x 12 Floor Tile	11-7/8" x 11-7/8" (30.23 cm x 30.23 cm)	5/16"	14.76	15

## APPLICATIONS

	TARGET DCOF WET	SUITABLE
Dry & Level – Interior Floor	N/A	●
Wet & Level – Interior Floor	≥ 0.42	●
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	●
Countertops	N/A	●
Pool Linings	N/A	

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit [americanolean.com/DCOF](http://americanolean.com/DCOF).

### APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

## FEATURES



All or select items within this series meet the requirements for these qualifications. For more information visit [americanolean.com](http://americanolean.com).

## TRIM\*

			NUMBER	PIECES/ CARTON
	Floor Bullnose	3 x 12	P43C9	30
	Cove Base	6 x 12	P36C9	22
	Cove Base Corner	1 x 6	PC36C9	15

\*All trim is available in solid colors only.

## INSTALLATION

Grout Joint Recommendation	Shade Variation
3/16"	High (V3)

## PERFORMANCE CHARACTERISTICS

	ASTM#	RESULT
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: [americanolean.com/information/TestResults](http://americanolean.com/information/TestResults).

## DURABILITY

### Floor Surface Wear Resistance

1	Residential Bathrooms	3	All Residential / Light Commercial
2	All Residential Areas	4	All Residential / Commercial

## NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: [americanolean.com/Factors](http://americanolean.com/Factors).

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to [americanolean.com/LargeTiles](http://americanolean.com/LargeTiles) for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

888.AOT.TILE

AMERICANOLEAN.COM



AMERICAN OLEAN®  
PROVEN IN TILE™



©2022 AMERICAN OLEAN (05/22)

LEARN MORE