

DEBONAIR ESTATE™

COLORBODY™ PORCELAIN

AMERICAN OLEAN®



WOOD LOOK



AMERICAN OLEAN®
PROVEN IN TILE™

DEBONAIR ESTATE™

Debonair Estate takes a sophisticated approach to the natural essence of wood.

This ColorBody™ porcelain tile, available in an 8 x 48 plank and an ultra-modern 1 x 24 mosaic, was inspired by Nordic minimalist design. Crafted with RevealSync 3D™, our new glazing technology that synchronizes the wood graphic and the structure for a truly authentic design.

Debonair Estate achieves the timeless style of natural hardwood without the hassle.

Reception



Cover photo features Debonair Estate™ Ebony 1 x 24 mosaic on the shower wall.

Above photo features Debonair Estate™ Parchment 8 x 48 plank on the floor and 1 x 24 mosaic on the wall.

DEBONAIR ESTATE™

COLORBODY™ PORCELAIN

AMERICAN OLEAN®

FINISHES: MATTE

USAGE



FLOOR



WALL



COUNTERTOP



SHOWER
FLOOR



EXTERIOR
FLOOR

MATERIAL



PRICING



LOW HIGH

SPECIAL FEATURES



STEPWISE™



TRUEEDGE™



MADE IN
THE U.S.A.



LARGE
FORMAT



MOSAIC/
DECO



ENCAUSTIC



TERRAZZO



PAVER




CUSTOMIZE

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

WOOD LOOK

FLOOR TILE

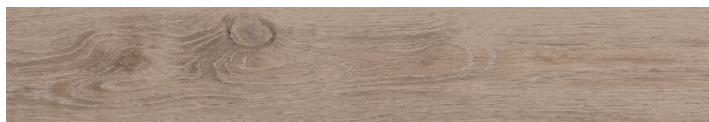


PARCHMENT DE06



ANTIQUE DE07



HEIRLOOM DE08

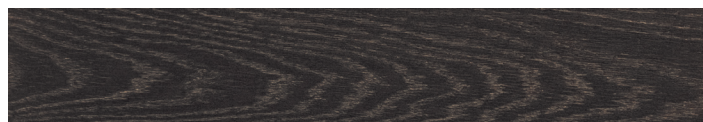

EBONY DE09


1 x 24 MOSAIC



PARCHMENT DE06



ANTIQUE DE07

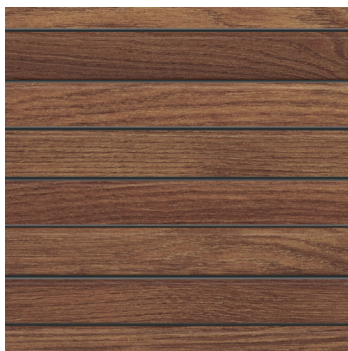

HEIRLOOM DE08



EBONY DE09



SLIP RESISTANT



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT



FIRE-RESISTANT
*Not Applicable to Mesh-Mounted Material



CLIMATEPRO™



SIMPLICLEAN™

VISIT AMERICANOLEAN.COM/WHYTILE FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

DEBONAIR ESTATE™

COLORBODY™ PORCELAIN

AMERICAN OLEAN®

FINISHES: MATTE

USAGE



MATERIAL



PRICING





SPECIAL FEATURES



NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

WOOD LOOK

SIZES

			THICKNESS	SQ. FT./ CARTON	PIECES/ CARTON
	8 x 48 Floor Tile	7-3/4" x 46-15/16" (19.70 cm x 119.20 cm)	5/16"	15.18	6
	1 x 24 Mosaic (Mesh-mounted)	11-5/8" x 23-3/8" Sheet (29.56 cm x 59.44 cm Sheet)	5/16"	7.56	4

APPLICATIONS

	TARGET DCOF WET	SUITABLE
Dry & Level – Interior Floor	N/A	●
Wet & Level – Interior Floor	≥ 0.42	●
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	●
Countertops	N/A	●
Pool Linings	N/A	

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit americanolean.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

INSTALLATION

Grout Joint Recommendation	Shade Variation
<p>Floor: 1/8" (3/16" when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.)</p> <p>Mosaic: 1/8"</p>	 HIGH (V3)

PERFORMANCE CHARACTERISTICS

	ASTM#	RESULTS
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs.
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: americanolean.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

1	Residential Bathrooms	3	All Residential / Light Commercial
2	All Residential Areas	4	All Residential / Commercial

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: americanolean.com/Factors.

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to americanolean.com/LargeTiles for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.



PRE-CONSUMER
RECYCLED MATERIALS



MADE IN THE U.S.A.



REVEALSNC 3D™



CERTIFIED
PO RCELAIN
— TILE —
0.0% or less water absorption

ZEROTOX
Healthy Homes | Healthy Planet

All or select items within this series meet the requirements for these qualifications.
For more information visit americanolean.com.

888.AOT.TILE



AMERICAN OLEAN®
PROVEN IN TILE™

AMERICANOLEAN.COM

©2023 AMERICAN OLEAN (06/23)