

WALL

HORIZON™
GLAZED CERAMIC




HORIZON™ GLAZED CERAMIC WALL WITH REVEAL IMAGING®


Soft linear graphics imitate the sweeping strokes of watercolors in the Horizon™ collection by American Olean®. Available in four neutral hues and a large-format linear design, this elegant series can be used as a dramatic feature wall or a striking accent to add subtle depth and dimension to any design vision.

HORIZON™

GLAZED CERAMIC WALL TILE

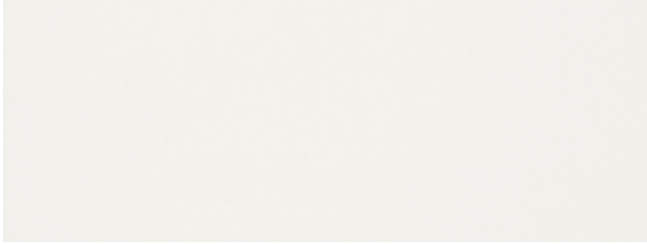

WHITE HZ01

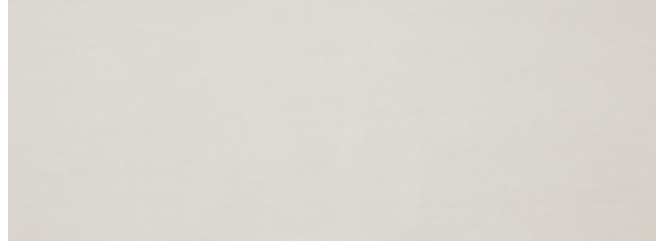

GREY HZ04



BEIGE HZ02



TAUPE HZ03

JOLLY TRIM



WHITE HZ01



GREY HZ04



BEIGE HZ02



TAUPE HZ03

COORDINATING TILE IDEAS



INFUSION™
Brown Fabric IF54
12 x 24 Floor Tile



THEORETICAL™
Creative Gray TH96
12 x 24 Floor Tile




All or select items within this series meet the requirements for these qualifications. For more information visit americanolean.com.

WALL




Photo features Horizon™ Taupe 6 x 16 on the wall.

SIZES

			THICKNESS	SQ. FT./ CARTON	PIECES/ CARTON
	6 x 16 Wall Tile	5-7/8" x 15-3/4" (15.00 cm x 40.00 cm)	5/16"	13.65	21

TRIM

			NUMBER	PIECES/ CARTON
	12" Jolly	1/2 x 12	S1/212J	12

INSTALLATION & PRICING

RECOMMENDED GROUT JOINT:

Wall: 1/16" (1/8" when installed in a staggered brick-joint pattern; overlap should not exceed 33%.)

RELATIVE PRICING: Medium

SHADE VARIATION



LOW
(V1)


PERFORMANCE CHARACTERISTICS

	ASTM#	WALL RESULT
Water Absorption	C373	< 20.0%
Breaking Strength	C648	120 - 230 lbs.
Scratch Hardness	MOHS	4.0 - 6.0
Chemical Resistance	C650	Resistant
Abrasion Resistance	C1027	N/A

USAGE

FLOORS	WALLS	COUNTERTOPS
	W	

APPLICATIONS

	TARGET DCOF WET	SUITABLE
Dry & Level – Interior Floor	N/A	
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	
Countertops	N/A	
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit americanolean.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications in non-freezing climates, when proper installation methods are followed.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

For additional information refer to "Factors to Consider" at: americanolean.com/Factors.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to americanolean.com/LargeTiles for more information.

