


FLOOR

QUARRY NATURALS®
QUARRY

FLOOR TILE

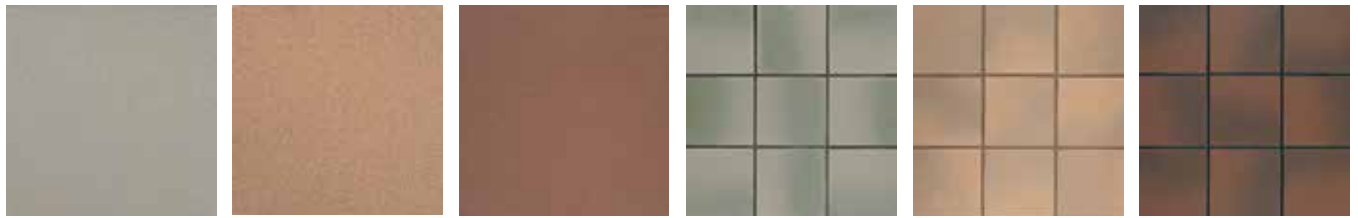

SHADOW GRAY N46 * (2) DESERT N03 * (1) LAVA RED N01 * (1) SHADOW FLASH N56 (2) PRAIRIE FLASH N04 (1) FIRE FLASH N02 (1)

SIZES

			THICKNESS	SQ. FT./ CARTON	PIECES/ CARTON
	8 x 8 Floor Tile	8" x 8" (20.30 cm x 20.30 cm)	1/2"	11.11	25
	6 x 6 Floor Tile	6" x 6" (15.20 cm x 15.20 cm)	1/2"	11.00	44
	3-7/8 x 8 Floor Tile	3-7/8" x 8" (9.80 cm x 20.30 cm)	1/2"	10.76	50

TRIM

			NUMBER	PIECES/ CARTON
	Floor Bullnose	6 x 6	Q-1665U	44
	Floor Bullnose Corner	6 x 6	QCRL-1665U	44
	Floor Bullnose	8 x 8	Q-1885U	25
	Floor Bullnose Corner	8 x 8	QCRL-1885U	25
	Cove Base ★	5 x 8	Q-3585U	24
	Cove Base ★	5 x 6	Q-3565U	44
	Cove Base Outcorner ★	5 x 6	QCR-L-3565U	20
	Cove Base Incorner ★	5 x 1	QB-3565U	25

Cove base trim is intended to coordinate with floor tile in the standard 90-degree installation position.
★ Not available in Flash colors; use coordinating solid color


INSTALLATION & PRICING

RECOMMENDED GROUT JOINT:

Floor: 3/8"

RELATIVE PRICING: Low to High

SHADE VARIATION



PERFORMANCE CHARACTERISTICS

	ASTM#	FLOOR RESULT
Water Absorption	C373	≤ 3.0%
Breaking Strength	C648	> 400 lbs.
Scratch Hardness	MOHS	7.0
Chemical Resistance	C650	Resistant
Abrasion Resistance	C1027	N/A

For additional information on test results, visit us at: americanolean.com/information/TestResults.



ABRASIVE GRAIN

* SPECIAL SURFACES:
Abrasive grain available in N01, N03 and N46 in 6 x 6 and 8 x 8 sizes.
Abrasive grain particles added to Quarry Naturals give improved slip resistance for many types of footwear, depending on maintenance conditions.

(1) & (2) notations indicate price group, (1) being the least expensive.

USAGE

FLOORS	WALLS	COUNTERTOPS
F	W	C

APPLICATIONS

	TARGET DCOF WET	SUITABLE
Dry & Level – Interior Floor	N/A	●
Wet & Level – Interior Floor	≥ 0.42	●
Shower Floors (Residential or Light Commercial)	≥ 0.42	●**
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	●*
Ramps & Inclines	≥ 0.65	●*
Walls/Backsplashes	N/A	●
Countertops	N/A	●
Pool Linings	N/A	●**

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit americanolean.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications in freezing and non-freezing climates, when proper installation methods are followed.

Suitable for industrial installations requiring high compressive strength.

Subject to Oils: Absorbs oils, grease and other liquids to keep floors slip-resistant, yet does not contaminate the surface. Proper cleaning methods easily remove any contaminants that do get absorbed into the tile.

* Abrasive surface only

** 6 x 6 floor tile only

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

For additional information refer to "Factors to Consider" at: americanolean.com/Factors.

We do not recommend light colored quarry tile in commercial kitchens unless properly sealed or a grout release is used. Periodic resealing of the tile may be necessary.

Special care should be taken when grouting; a grout release is recommended to prevent finely powdered pigments from lodging in the pores of the tile surface.

It is necessary to follow the proper procedures and recommendations from the grout and maintenance products' manufacturers.

Shade and graphic variation enhance the natural beauty of this product. Tile should be selected from multiple cartons and arranged for optimal visual appearance prior to installation.



All or select items within this series meet the requirements for these qualifications. For more information visit americanolean.com.