

QUARRY REGULAR™  
QUARRY

AMERICAN OLEAN®



QUARRY

Coffee House



AMERICAN OLEAN®  
PROVEN IN TILE™



# QUARRY REGULAR™

Quarry Tile possesses warm, natural color throughout the tile, which makes it perfect throughout the home, from floors and walls to outdoor patio and pool areas.

You can choose from inviting solid colors, or "flash" surfaces with slightly-striated colors and a square edge for a little added visual texture. All with a slip-resistant, unglazed surface.

Cover and Above Photo features  
Quarry Regular Fawn Gray 6 x 6 on the floor.

# QUARRY REGULAR™

QUARRY

AMERICAN OLEAN®

FINISHES: MATTE | TEXTURED

## USAGE



## MATERIAL



## PRICING



## SPECIAL FEATURES



## QUARRY


### FLOOR TILE




FAWN GRAY Q06 \* (2)




CANYON RED Q01 \* (1)

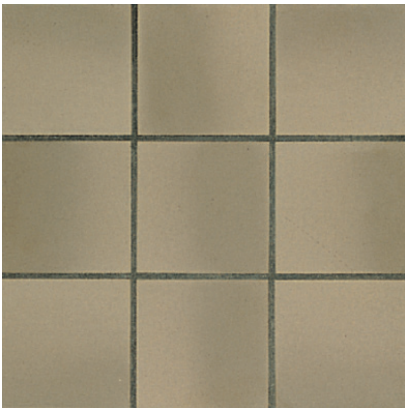

GRAY FLASH Q16 \* (2)

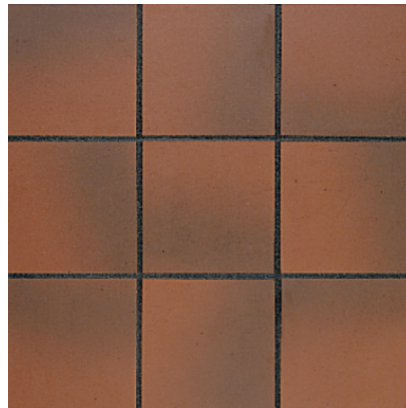

EMBER FLASH Q02 \* (2)

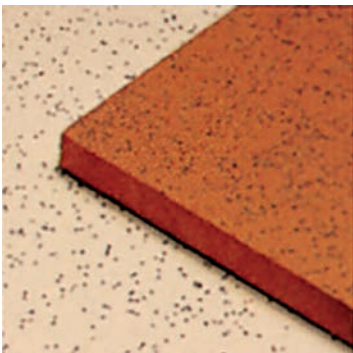

ABRASIVE GRAIN

#### SPECIAL SURFACES:

Abrasive grain particles added to Quarry Tile give improved slip resistance for many types of footwear, depending on maintenance conditions. 6 x 6 size available in all Quarry colors;

(1) & (2) notations indicate price group, (1) being the least expensive.



VISIT [AMERICANOLEAN.COM/WHYTILE](http://AMERICANOLEAN.COM/WHYTILE) FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

# QUARRY REGULAR™

QUARRY

AMERICAN OLEAN®

FINISHES: MATTE | TEXTURED

## USAGE




## MATERIAL



## PRICING



## SPECIAL FEATURES



## QUARRY

## SIZES

			THICKNESS	SQ. FT./ CARTON	PIECES/ CARTON
	6 x 6 Floor Tile	6" x 6" (15.20 cm x 15.20 cm)	1/2"	11.00	44

## APPLICATIONS

	TARGET DCOF WET	SUITABLE
Dry & Level – Interior Floor	N/A	●
Wet & Level – Interior Floor	≥ 0.42	●
Shower Floors - Standard Center Drain (Residential or Light Commercial)	≥ 0.42	●
Shower Floors - Linear Drain	≥ 0.60	●
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	●
Ramps & Inclines	≥ 0.65	●*
Walls/Backsplashes	N/A	●
Countertops	N/A	●
Pool Linings	N/A	●

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit [americanolean.com/DCOF](http://americanolean.com/DCOF).

### APPLICATION NOTES:

Suitable for industrial installations requiring high compressive strength.

Subject to Oils: Absorbs oils, grease and other liquids to keep floors slip-resistant, yet does not contaminate the surface. Proper cleaning methods easily remove any contaminants that do get absorbed into the tile.

\* Abrasive surface only.

## DURABILITY

### Floor Surface Wear Resistance

1 Residential Bathrooms	3 All Residential / Light Commercial
2 All Residential Areas	④ All Residential / Commercial

## FEATURES



PRE-CONSUMER  
RECYCLED MATERIALS



MADE IN THE U.S.A.



**ZEROTOX**  
Healthy Homes | Healthy Planet

All or select items within this series meet the requirements for these qualifications. For more information visit [americanolean.com](http://americanolean.com).

## TRIM

	TYPE	NUMBER	SIZE	PIECES/ CARTON
	Bullnose*	Q1665	6 x 6	44
	Bullnose Corner*	QCRL1665	6 x 6	44
	Round Top Cover Base*	Q3565	5 x 6	44
	Round Top Cover Base Corner Right*	QCR3565	5 x 6	20
	Round Top Cover Base Corner Left*	QCL3565	5 x 6	20
	Cove Base Inside Corner*	QB3565	1 x 5	25

Bullnose, cove base and cove base corner trim are intended to coordinate with floor tile in the standard 90-degree installation position.

\* Available with and without abrasive grain.

◆ Not available with abrasive surface or in flash colors; use coordinating solid.

## INSTALLATION

Grout Joint Recommendation	Shade Variation
3/8"	HIGH (V3) - non-Flash colors
	RANDOM (V4) - Flash colors

## PERFORMANCE CHARACTERISTICS

	ASTM#	RESULT
Water Absorption	C373	< 3.0%
Breaking Strength	C648	> 350 lbs
Scratch Hardness	MOHS	7.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: [americanolean.com/information/TestResults](http://americanolean.com/information/TestResults).

## NOTES

Since there are variations in all fired ceramic products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

Subject to Oils: Absorbs oils, grease and other liquids to keep floors slip-resistant, yet does not contaminate the surface. Proper cleaning methods easily remove any contaminants that do get absorbed into the tile.

Suitable for industrial installations requiring high compressive strength. Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection.

Abrasive surface suitable for use on ramps. For additional information refer to "Factors to Consider at: [daltile.com/Factors](http://daltile.com/Factors).

It is necessary to follow the proper procedures and recommendations from the grout and maintenance products' manufacturers.

Strong random shading enhances the natural beauty of this product. To achieve optimal results, tile should be selected from multiple cartons and shading arrangement planned prior to installation.

Special care should be taken when grouting, a grout release is recommended to prevent finely powdered pigments from lodging in the pores of the tile surface.

888.AOT.TILE



AMERICAN OLEAN®  
PROVEN IN TILE™

AMERICANLEAN.COM

©2024 AMERICAN OLEAN (04/24)