

QUARRY TILE™
QUARRY

AMERICAN OLEAN®



QUARRY



AMERICAN OLEAN®
PROVEN IN TILE™



QUARRY TILE™

Quarry Tile possesses warm, natural color throughout the tile, which makes it perfect throughout the home, from floors and walls to outdoor patio and pool areas.

You can choose from inviting solid colors, or "flash" surfaces with slightly-striated colors and a square edge for a little added visual texture. All with a slip-resistant, unglazed surface.

Cover and above photos feature Quarry Tile Fawn Gray and Canyon Red 6 x 6 and 4 x 8 on the floor.

QUARRY TILE

QUARRY

AMERICAN OLEAN®

FINISHES: MATTE | TEXTURED

USAGE



FLOOR



WALL



COUNTERTOP



SHOWER FLOOR




EXTERIOR FLOOR

MATERIAL



PRICING



LOW HIGH

SPECIAL FEATURES



STEPWISE™



TRUEDGE™



MADE IN THE U.S.A.



LARGE FORMAT



MOSAIC/DECO



ENCAUSTIC



TERRAZZO



PAVER



CUSTOMIZE

QUARRY


FLOOR TILE




FAWN GRAY Q06 * (2)




CANYON RED Q01 * (1)

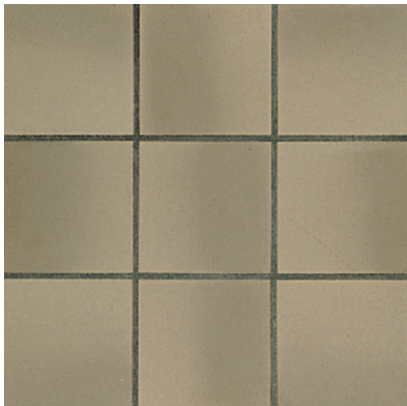

GRAY FLASH Q16 * (2)

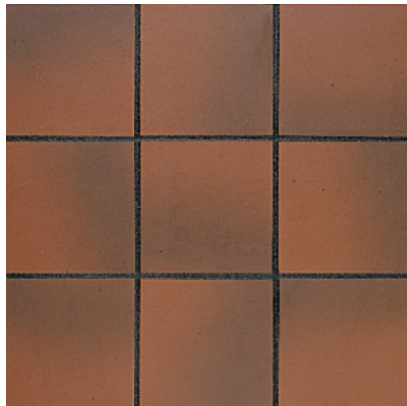

EMBER FLASH Q02 * (2)

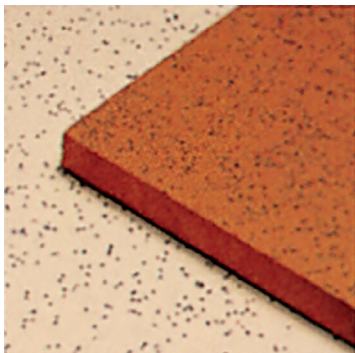

ABRASIVE GRAIN

SPECIAL SURFACES:

Abrasive grain particles added to Quarry Tile give improved slip resistance for many types of footwear, depending on maintenance conditions. 6 x 6 size available in all Quarry colors; 4 x 8 size available in Q01 and Q02 colors only.

(1) & (2) notations indicate price group, (1) being the least expensive.



SLIP RESISTANT



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT



FIRE-RESISTANT



CLIMATEPRO™



SIMPLICLEAN™

VISIT AMERICANOLEAN.COM/WHYTILE FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

FINISHES: MATTE | TEXTURED

USAGE




MATERIAL



PRICING



SPECIAL FEATURES



QUARRY

SIZES

			THICKNESS	SQ. FT./ CARTON	PIECES/ CARTON
	6 x 6 Floor Tile	6" x 6" (15.20 cm x 15.20 cm)	1/2"	11.00	44
	4 x 8 Floor Tile*	4" x 8" (10.20 cm x 20.30 cm)	1/2"	10.76	50

* Available in Canyon Red Q01 and Ember Flash Q02

APPLICATIONS

	TARGET DCOF WET	SUITABLE
Dry & Level – Interior Floor	N/A	●
Wet & Level – Interior Floor	≥ 0.42	●
Shower Floors (Residential or Light Commercial)	≥ 0.42	●**
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	●
Ramps & Inclines	≥ 0.65	●*
Walls/Backsplashes	N/A	●
Countertops	N/A	●
Pool Linings	N/A	●**

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit americanolean.com/DCOF.

APPLICATION NOTES:

Suitable for industrial installations requiring high compressive strength.

Subject to Oils: Absorbs oils, grease and other liquids to keep floors slip-resistant, yet does not contaminate the surface. Proper cleaning methods easily remove any contaminants that do get absorbed into the tile.

* Abrasive surface only.

** 6 x 6 floor tile only.

DURABILITY

Floor Surface Wear Resistance

1 Residential Bathrooms	3 All Residential / Light Commercial
2 All Residential Areas	(4) All Residential / Commercial

TRIM

			NUMBER	PIECES/ CARTON
	Bullnose	4 x 8	Q1485†	50
	Bullnose	6 x 6	Q1665*	44
	Bullnose Corner	6 x 6	QCRL1665	44
	Round Top Cove Base	5 x 6	Q3565°	44
	Round Top Cove Base Corner Right	5 x 6	QCR3565°	20
	Round Top Cove Base Corner Left	5 x 6	QCL3565°	20
	Cove Base Inside Corner	1 x 5	QB3565°	25

Bullnose, cove base and cove base corner trim are intended to coordinate with floor tile in the standard 90-degree installation position.

* Available with and without abrasive grain. † Available in colors Q01 and Q02 only.

° Not available with abrasive surface or in Flash colors; use coordinating solid.

INSTALLATION

Grout Joint Recommendation	Shade Variation
3/8"	 HIGH (V3) - non-Flash colors RANDOM (V4) - Flash colors

PERFORMANCE CHARACTERISTICS

	ASTM#	FLOOR RESULT
Water Absorption	C373	< 3.0%
Breaking Strength	C648	> 350 lbs
Scratch Hardness	MOHS	7.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: americanolean.com/information/TestResults.

NOTES

Strong random shading enhances the natural beauty of this product. To achieve optimal results, tile should be selected from multiple cartons and shading arrangement planned prior to installation.

Since there are variations in all fired ceramic products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Abrasive surface suitable for use on ramps.

For additional information refer to "Factors to Consider" at daltile.com/Factors.

Special care should be taken when grouting, a grout release is recommended to prevent finely powdered pigments from lodging in the pores of the tile surface.

It is necessary to follow the proper procedures and recommendations from the grout and maintenance products' manufacturers.



PRE-CONSUMER
RECYCLED MATERIALS



MADE IN THE U.S.A.



ZEROTOX
Healthy Homes | Healthy Planet

All or select items within this series meet the requirements for these qualifications.
For more information visit americanolean.com.

888.AOT.TILE

AMERICANOLEAN.COM



AMERICAN OLEAN®
PROVEN IN TILE™

©2021 AMERICAN OLEAN (07/21)