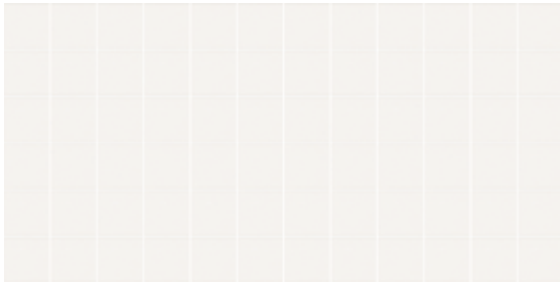


SATINBRITES™
GLAZED CERAMIC

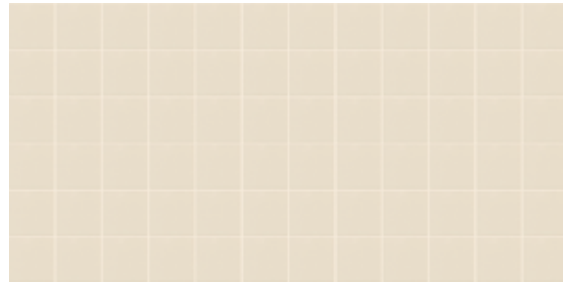


Photo features Satinbrites Almond 2 x 2 mosaic on the wall.


GLAZED CERAMIC MOSAIC - GLOSS




ICE WHITE D25 (1)



ALMOND D12 (1)

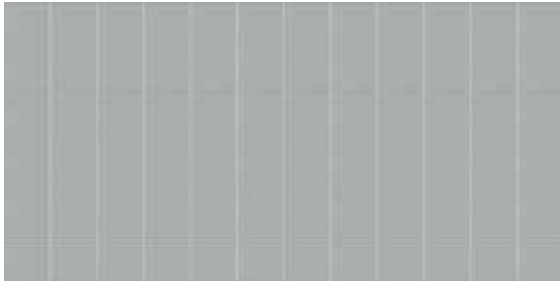


LIGHT SMOKE D42 (1)

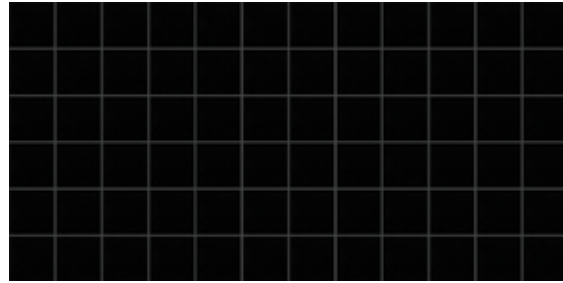

BLACK D35 (2) ✦

(1) & (2) notations indicate price group, (1) being the least expensive.
 ✦ This item is made to order, extended lead times may be required.

SIZE

			THICKNESS	SQ. FT./ CARTON	PIECES/ CARTON
	2 x 2 Mosaic ■	12" x 24" Sheet (30.48 cm x 60.96 cm Sheet)	1/4"	30.00	15

■ Dot-mounted

INSTALLATION & PRICING

RECOMMENDED GROUT JOINT:
 Mosaic: 1/8"

RELATIVE PRICING: Medium

SHADE VARIATION



LOW
(V1)

PERFORMANCE CHARACTERISTICS



	ASTM#	MOSAIC RESULT
Water Absorption	C373	< 3.0%
Breaking Strength	C648	> 300 lbs.
Scratch Hardness	MOHS	4.0
Chemical Resistance	C650	Resistant
Abrasion Resistance	C1027	N/A

For additional information on test results, visit us at: americanolean.com/information/TestResults.

USAGE

FLOORS	WALLS	COUNTERTOPS
	W	

APPLICATIONS

	TARGET DCOF WET	SUITABLE
Dry & Level – Interior Floor	N/A	
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	
Countertops	N/A	
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit americanolean.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications in non-freezing climates, when proper installation methods are followed.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

For additional information refer to "Factors to Consider" at: americanolean.com/Factors.



All or select items within this series meet the requirements for these qualifications. For more information visit americanolean.com.