


SATINGLO™


GLAZED CERAMIC & GLAZED PORCELAIN

Photo features Satinglo Light Smoke 2 x 2 mosaic on the front wall and Bright & Matte™ White 4-1/4 x 4-1/4 on the shower wall.


GLAZED CERAMIC MOSAIC - MATTE

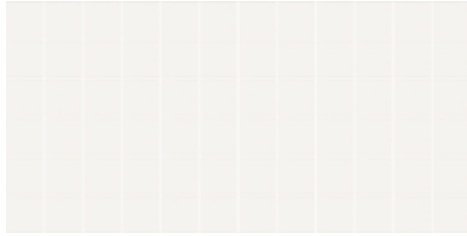


ICE WHITE D25 (1)

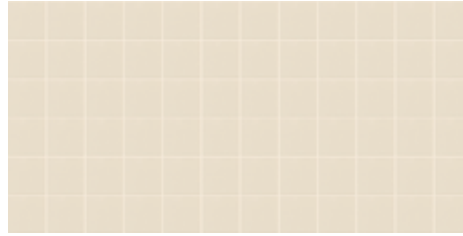

ALMOND D12 (1)

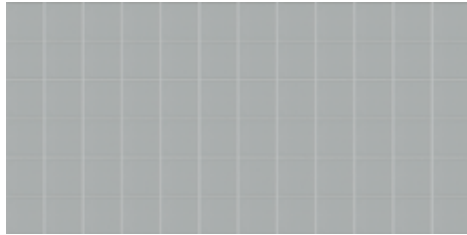


LIGHT SMOKE D42 (1)

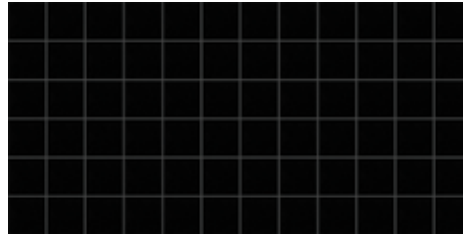


BLACK D35 (2) ❖

(1) & (2) notations indicate price group, (1) being the least expensive.
❖ This item is made to order, extended lead times may be required.

GLAZED PORCELAIN MOSAIC





D25 ICE WHITE / SP-8401
Black D35 13%, Ice White D25 87%



D25 ICE WHITE
Ice White D25 - 100%

SIZES

			THICKNESS	SQ. FT./ CARTON	PIECES/ CARTON
	2 x 2 Mosaic ■	12" x 24" Sheet (30.48 cm x 60.96 cm Sheet)	1/4"	30.00	15
	1 x 1 Hexagon Mosaic *	10" x 12" Sheet (25.40 x 30.48 cm Sheet)	1/4"	9.09	10

❖ Sold in 9.09 s/f full carton quantities only.
Only available in 100% D25 Ice White and Ice White with D35 Black pattern. Black D35 - 13%, Ice White D25 - 87%.
* Mesh-mounted ■ Dot-mounted

INSTALLATION & PRICING

RECOMMENDED GROUT JOINT:
Mosaic: 1/8"

RELATIVE PRICING: Medium

SHADE VARIATION



LOW
(V1)

PERFORMANCE CHARACTERISTICS

	ASTM#	2 x 2 MOSAIC RESULT	1 x 1 MOSAIC RESULT
Water Absorption	C373	< 3.0%	< 0.5%
Breaking Strength	C648	> 300 lbs.	> 300 lbs.
Scratch Hardness	MOHS	6.75 - 7.5	6.75 - 7.5
Chemical Resistance	C650	Resistant	Resistant
Abrasion Resistance	C1027	N/A	N/A

For additional information on test results, visit us at: americanolean.com/information/TestResults.

USAGE

FLOORS	WALLS	COUNTERTOPS
F	W	C

APPLICATIONS

	TARGET DCOF WET	SUITABLE
Dry & Level – Interior Floor	N/A	●
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	●
Countertops	N/A	●*
Pool Linings	N/A	●

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit americanolean.com/DCOF.

APPLICATION NOTES:

1 x 1 mosaic suitable for exterior applications in freezing and non-freezing climates, when proper installation methods are followed.
2 x 2 mosaic suitable for exterior applications in non-freezing climates, when proper installation methods are followed.
*Darker colors on countertops may show scratches.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: americanolean.com/Factors.

Use of a latex modified thin-set is recommended for installation. For more information, visit americanolean.com.



All or select items within this series meet the requirements for these qualifications. For more information visit americanolean.com.