


SURE STEP II® & PAVER™  
PAVER


UNGLAZED TREAD FLOOR TILE



RED Q30

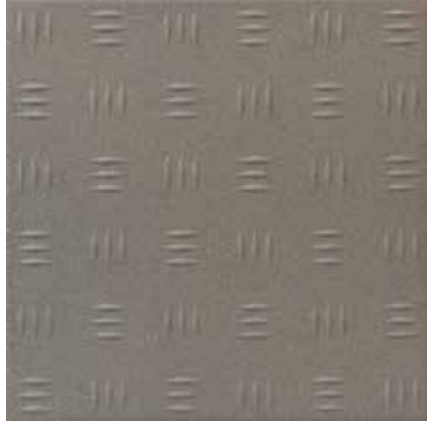

FAWN GRAY Q32

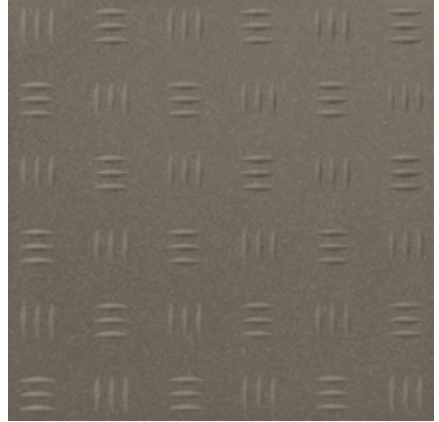

DOVETAIL Q36

UNGLAZED PAVER FLOOR TILE



RED Q31



FAWN GRAY Q33




DOVETAIL Q37

QUARRYGUARD™

QUARRYGUARD™ IMPROVES THE GROUT RELEASE AND STAIN RESISTANCE OF THE TILE, RESULTING IN EASIER CLEAN-UP WITH INSTALLATION AND TILE THAT IS LESS LIKELY TO GET STAINED IN THE FUTURE.


SUPERB TILE PERFORMANCE

- Stain resistant
- Easier clean-up after installation

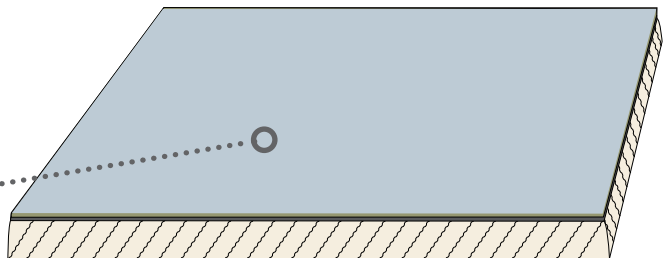






# SURE STEP II® & PAVER™ PAVER TILE

## SIZES

			THICKNESS	SQ. FT./ CARTON	PIECES/ CARTON
	6 x 6 Floor Tile	6" x 6" (15.20 cm x 15.20 cm)	3/8"	12.00	48

## TRIM

				NUMBER	PIECES/ CARTON
	Floor Bullnose	6 x 6		P-1665	48
	Floor Bullnose Corner	6 x 6		PC-1665	26
	Cove Base	6 x 6		P-3665	48
	Cove Base Long Corner	6 x 6		PCR-L-3665	26
	Cove Base Incorner	3/4 x 6		PB-3665	50

Cove base trim is intended to coordinate with floor tile in the standard 90-degree installation position.

## INSTALLATION & PRICING

### RECOMMENDED GROUT JOINT:

Floor: 3/8"

RELATIVE PRICING: Medium

### SHADE VARIATION



## PERFORMANCE CHARACTERISTICS

	ASTM#	FLOOR RESULT
Water Absorption	C373	< 3.0%
Breaking Strength	C648	> 400 lbs.
Scratch Hardness	MOHS	7.0
Chemical Resistance	C650	Resistant
Abrasion Resistance	C1027	N/A

For additional information on test results, visit us at: [americanolean.com/information/TestResults](http://americanolean.com/information/TestResults).

## USAGE

FLOORS	WALLS	COUNTERTOPS
F	W	C

## APPLICATIONS

	TARGET DCOF WET	SUITABLE
Dry & Level – Interior Floor	N/A	●
Wet & Level – Interior Floor	≥ 0.42	●
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	●*
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	●
Countertops	N/A	●
Pool Linings	N/A	●

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit [americanolean.com/DCOF](http://americanolean.com/DCOF).

### APPLICATION NOTES:

Suitable for exterior applications in freezing and non-freezing climates, when proper installation methods are followed.

Suitable for industrial installations requiring high compressive strength.

Subject to Oils: Absorbs oils, grease and other liquids to keep floors slip-resistant, yet does not contaminate the surface. Proper cleaning methods easily remove any contaminants that do get absorbed into the tile.

\* Tread Surface only

## NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: [americanolean.com/Factors](http://americanolean.com/Factors).

Use of a latex modified thin-set is recommended for installation. For more information, visit [americanolean.com](http://americanolean.com).

Special care should be taken when grouting; a grout release is recommended to prevent finely powdered pigments from lodging in the pores of the tile surface.

It is necessary to follow the proper procedures and recommendations from the grout and maintenance products' manufacturers.

Shade and graphic variation enhance the natural beauty of this product. Tile should be selected from multiple cartons and arranged for optimal visual appearance prior to installation.



All or select items within this series meet the requirements for these qualifications. For more information visit [americanolean.com](http://americanolean.com).