

ELEVATED

*Elements*



 daltile®



**ELEVATED ELEMENTS** IS A CURATED ASSORTMENT  
OF OUR MOST VERSATILE NEUTRALS THAT CAN  
EASILY BE MIXED AND MATCHED TO CREATE  
ENDLESS POSSIBILITIES OF DESIGNS. FUNCTIONAL  
FOR ANY SPACE, THESE FASHION-FORWARD  
NEUTRALS COMPLETE THE DESIGNS OF YESTERDAY,  
TODAY, AND TOMORROW AS THEIR COLORS AND  
TEXTURES ARE SIMPLY TIMELESS. THE CLASSIC  
FOUNDATION OF OUR ELEVATED ELEMENTS  
COLLECTION OFFERS BOTH LONGEVITY AND  
VERSATILITY – PERFECT FOR TODAY'S LIFESTYLE.



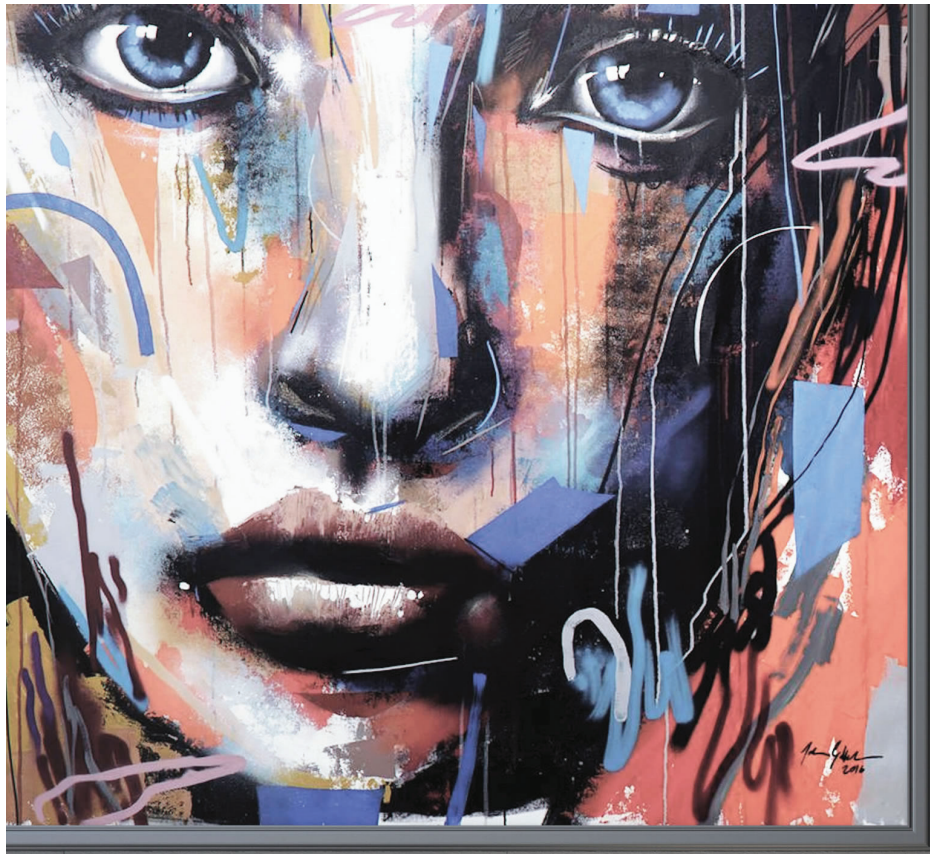


Photo features Median Charcoal 24 x 24 textured on the wall and Gray 24 x 24 matte on the floor.





1

MEDIAN™

RELIABLE & DURABLE, MEDIAN™

IS BOUNDLESS OF POSSIBILITIES WITH A VERSATILE COLOR PALETTE FULL OF NEUTRALS AND TWO FINISHES THAT WORK IN VARIOUS STYLES OF DESIGN. IS PERFECT FOR FLOORS, WALLS, AND COUNTERTOPS.

2

CHORD™

FROM LIGHT TO DARK, CHORD™

RESONATES A BOUNTIFUL COLOR SPECTRUM AND NOTABLE DECORATIVE ASPECT WITH LIGHT COLORS THAT RADIATE A PLASTER GRAPHIC FULL OF GLEAM, AND DARK COLORS IN A CEMENT VISUAL WORN BY TIME AND NATURE.

3

ASTRONOMY™

STELLAR IN DESIGN, ASTRONOMY™

IS INSPIRED BY SPACE AND STARDUST. DELIVERING FOUR SMOOTH NEUTRAL COLORS COMPLETE WITH STEPWISE™ TECHNOLOGY FOR INCREASED SLIP-RESISTANCE, MAKING IT THE STELLAR CHOICE FOR NEARLY ANY SPACE.


# color PALETTE




WHITE MN40




BEIGE MN41




TAUPE MN42




LIGHT GRAY MN43



GRAY MN44



CHARCOAL MN45

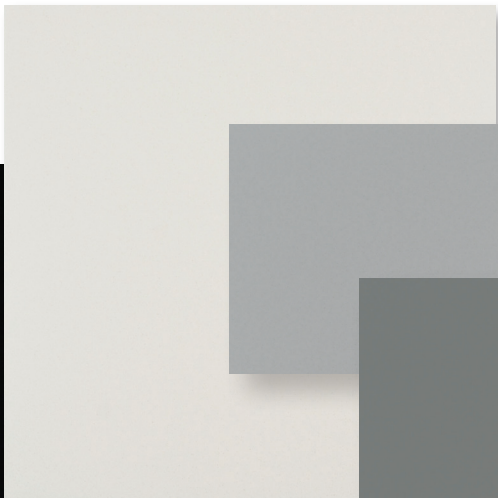

## MEDIAN™ FEATURES BOTH DURABILITY AND BEAUTY IN DESIGN.

It has the versatility and functionality needed for both residential and commercial installations. Available in six on-trend colors, this TruEdge™ rectified and modular collection offers unique design possibilities by combining multiple surface textures and sizes. Median comes in 12 x 24 and 24 x 24 and features a 4 x 24 bullnose in both matte and polished finishes.

MEDIAN™



Photo features Median™ Taupe 24 x 24 polished on the wall and Grey 24 x 24 textured on the floor.

## STONE LOOK

## USAGE



SEE CHARTS FOR FULL  
PRODUCT DETAILS

## SPECIAL FEATURES



SIZES:

24 x 24  
Floor Tile

12 x 24  
Floor Tile

FLOOR TILE


FINISHES: MATTE | POLISHED | TEXTURED



WHITE MN40



BEIGE MN41

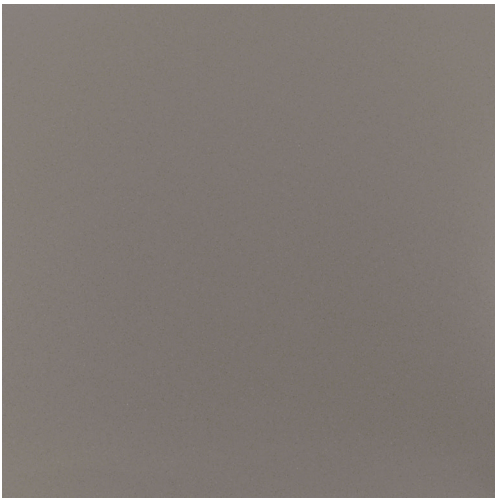

TAUPE MN42



LIGHT GRAY MN43



GRAY MN44



CHARCOAL MN45



SLIP RESISTANT



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT\*



FIRE-RESISTANT



CLIMATEPRO™





SIMPLICLEAN™

\*Applicable to products with Matte and Textured Finishes

VISIT THE WHY TILE PAGE AT [WWW.DALTILE.COM](http://WWW.DALTILE.COM) FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.



## SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	24 x 24 Floor Tile <sup>^</sup>	(23-5/8" x 23-5/8") (60.00 cm x 60.00 cm)	3/8"	15.50	4
	12 x 24 Floor Tile	(11-3/4" x 23-5/8") (29.85 cm x 60.0 cm)	5/16"	13.45	7

<sup>^</sup> Textured finish available in 24 x 24 size only.

## APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓*
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	✓**
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit [daltile.com/DCOF](http://daltile.com/DCOF).

### APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

\* Matte and Textured only.

\*\* Textured only.

## PERFORMANCE CHARACTERISTICS




	ASTM#	Textured Result	Matte Result	Polished Result
Water Absorption	C373	< 0.5%	< 0.5%	< 0.5%
Breaking Strength	C648	> 275 lbs	> 275 lbs	> 275 lbs
Scratch Hardness	MOHS	8.0	6.0	5.0
Chemical Resistance	C650	Resistant	Resistant	Resistant

For additional information on test results, visit us at: [daltile.com/information/TestResults](http://daltile.com/information/TestResults).

## PRE-CONSUMER RECYCLED MATERIALS

All or select items within this series meet the requirements for these qualifications. For more information, visit [daltile.com](http://daltile.com).

## TRIM

	Type	Number	Size	Pieces/ Carton
	Floor Bullnose <sup>•</sup>	S44F9	4 x 24	12
	Cove Base <sup>◄</sup>	P36C9TB	6 x 12	22
	Cove Outcorner <sup>◄</sup>	PC36C9TB	1 x 6	15


Cove base trim is intended to coordinate with floor tile in the standard 90-degree installation position.

Cove base and cove corner trim are suitable for non-freezing climates only.

<sup>•</sup> Available in Matte and Polished finishes only.

<sup>◄</sup> Available in Matte finish only.

## INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8" (3/16" when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.)	 Medium (V2)

## DURABILITY

### Floor Surface Wear Resistance

1	Residential Bathrooms	③	All Residential / Light Commercial <sup>+</sup>
2	All Residential Areas	④	All Residential / Commercial <sup>*</sup>

<sup>+</sup> Polished finish only.

<sup>\*</sup> Matte and Textured finishes only.

## NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: [daltile.com/Factors](http://daltile.com/Factors).

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to [daltile.com/LargeTiles](http://daltile.com/LargeTiles) for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

# color PALETTE



SONATA  
WHITE CH20




ALLEGRO  
BEIGE CH21




CANON  
GREY CH22



FORTE  
GREY CH25



RHYTHM  
BROWN CH23



BARITONE  
BROWN CH24



## CHORD™

### MARCH TO YOUR OWN BEAT WITH THE MELODIOUS COLLECTION, CHORD™.

Find rhythm in the appeal of the 12 x 24 decorative accent which succeeds as a solo or duets beautifully with floor tile. Three colors offered in a plaster graphic and three colors offered in a cement visual are all available in unpolished and light polished finishes. A three-inch triangle mosaic is the final note in this harmonious composition.





Photo features Chord™ Rhythm Brown 12 x 24 floor tile and 12 x 24 decorative accent in a chevron pattern on the floor

## CONCRETE LOOK

### USAGE





SEE CHARTS FOR FULL PRODUCT DETAILS

## SPECIAL FEATURES



**SIZES:**



3" Triangle Mosaic  
(Mesh-mounted)

**FINISHES:** MATTE | LIGHT POLISHED

**FLOOR TILE – AVAILABLE IN LIGHT POLISHED & MATTE**


**PLASTER VISUAL**



SONATA WHITE CH20



ALLEGRO BEIGE CH21

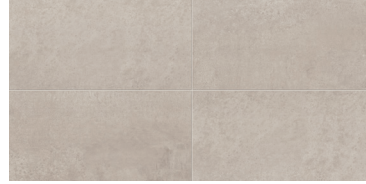


CANON GREY CH22


**CEMENT VISUAL**



FORTE GREY CH25

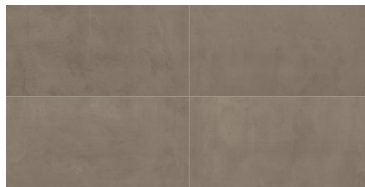


RHYTHM BROWN CH23

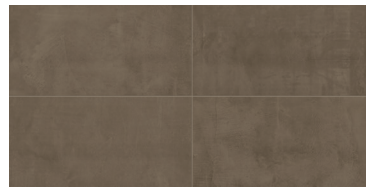

BARITONE BROWN CH24

**TEXTURED DECORATIVE ACCENT – AVAILABLE IN MATTE ONLY**

**PLASTER VISUAL**

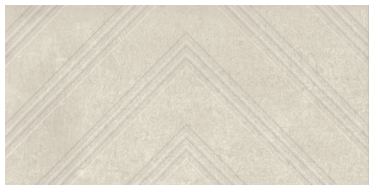

SONATA WHITE CH20




ALLEGRO BEIGE CH21



CANON GREY CH22


**CEMENT VISUAL**

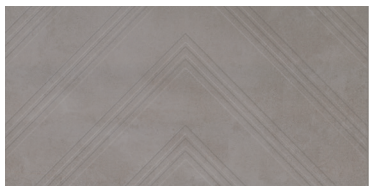

FORTE GREY CH25



RHYTHM BROWN CH23

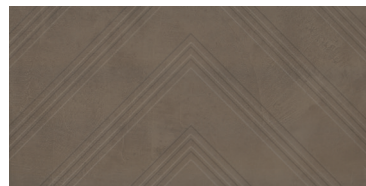

BARITONE BROWN CH24

**DECORATIVE  
ACCENT PATTERN  
OPTIONS – SHOWN IN  
ALLEGRO BEIGE**



OPTION 1: CHEVRON PATTERN



OPTION 2: DIAMOND PATTERN

**3" TRIANGLE MOSAIC – AVAILABLE IN MATTE ONLY**




SONATA  
WHITE CH20



ALLEGRO  
BEIGE CH21




CANON  
GREY CH22



FORTE  
GREY CH25



RHYTHM  
BROWN CH23



BARITONE  
BROWN CH24



SLIP RESISTANT



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT<sup>1</sup>  
<sup>1</sup>Applicable to products with Matte and  
Textured Finishes



FIRE-RESISTANT<sup>1</sup>  
<sup>1</sup>Not Applicable to Mesh-Mounted  
Mosaics



CLIMATEPRO™






SIMPLICLEAN™



## SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	24 x 48 Floor Tile	(23-3/8" x 46-15/16") (59.44 cm x 119.30 cm)	5/16"	15.26	2
	24 x 24 Floor Tile	(23-3/8" x 23-3/8") (59.44 cm x 59.44 cm)	5/16"	15.20	4
	12 x 24 Floor Tile	(11-5/8" x 23-3/8") (29.56 cm x 59.44 cm)	5/16"	15.12	8
	12 x 24 Textured Decorative Accent†	(11-5/8" x 23-3/8") (29.56 cm x 59.44 cm)	5/16"	15.12	8
	3" Triangle Mosaic† (Mesh-mounted)	(11-5/8" x 14-1/2" Sheet) (29.53 x 36.83 cm Sheet)	5/16"	5.00	5

## TRIM

Type	Number	Size	Pieces/ Carton
 Floor Bullnose	P-43F9	3 x 24	10
 Cove Base†	P-36C9B	6 x 12	22
 Cove Base Outcorner†	PC-36C9B	1 x 6	15

Cove base trim is intended to coordinate with floor tile in the standard 90-degree installation position. Cove base and cove corner trim are suitable for non-freezing climates only.

† Matte only

## APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓*
Shower Floors (Residential or Light Commercial)	≥ 0.42	✓**
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	✓**

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit [daltile.com/DCOF](http://daltile.com/DCOF).


### APPLICATION NOTES:

Suitable for exterior applications in freezing and non-freezing climates when proper installation methods are followed.

\* Matte floor and mosaic tile only

\*\* Mosaic tile only

## INSTALLATION

Grout Joint Recommendation	Shade Variation
<b>Floor:</b> 1/8" (3/16" when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%).	 High (V3)
<b>Mosaic:</b> 1/8"	

## PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: [daltile.com/information/TestResults](http://daltile.com/information/TestResults).

## DURABILITY

Floor Surface Wear Resistance			
1	Residential Bathrooms	3	All Residential / Light Commercial
2	All Residential Areas	④	All Residential / Commercial

## NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: [daltile.com/Factors](http://daltile.com/Factors).

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to [daltile.com/LargeTiles](http://daltile.com/LargeTiles) for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

Manufacturer Advisory: All tile is measured by the DCOF AcuTest™ method. Tiles with DCOF values <0.42 are not recommended for use in areas with wet or slippery conditions. For more information, see ANSI standard A137.1 section 6.2.2.1.10, available at [www.tileusa.com](http://www.tileusa.com).



All or select items within this series meet the requirements for these qualifications. For more information, visit [daltile.com](http://daltile.com).


# color PALETTE




ECLIPSE AT70



ORION AT71



SOLSTICE AT72



NEBULA AT73



ASTRONOMY™

ASTRONOMY™ IS INSPIRED BY A VIEW INTO DEEP SPACE AND REPRESENTS THE CROSSROADS OF PRACTICALITY AND DREAMS. This porcelain tile is sprinkled with stardust and features a matte limestone look. Floor tile made with StepWise™ technology is suitable for most exterior applications and is available in four mystical tones in your favorite sizes.





Photo features Median™ Astronomy™ Orion 12 x 24 on the floor with Panoramic Gypsum Calacatta and Chromium matte on the countertops and Gypsum Calacatta glossy on the wall

## STONE LOOK

## USAGE



SEE CHARTS FOR FULL  
PRODUCT DETAILS

## SPECIAL FEATURES



# ASTRONOMY™

COLORBODY™ PORCELAIN with STEPWISE™

SIZES:

12 x 24  
Floor Tile

18 x 18  
Floor Tile

FINISHES: MATTE

## COLORBODY™ PORCELAIN FLOOR TILE with STEPWISE™



ECLIPSE AT70



ORION AT71



SOLSTICE AT72



NEBULA AT73

50% MORE  
SLIP RESISTANT  
THAN ORDINARY TILE<sup>†</sup>

<sup>†</sup>When compared to tile meeting ANSI standards.



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT<sup>†</sup>

<sup>†</sup>Applicable to products with Matte and Textured Finishes



FIRE-RESISTANT<sup>†</sup>

<sup>†</sup>Not Applicable to Mesh-Mounted Tiles



INDOOR/OUTDOOR



SIMPLICLEAN™



## ALL STYLE. NO SLIPS.

Don't tip-toe through life. Step stylishly on non-slip tile that's 50% more slip resistant than ordinary tile. And because it's Daltile, you'll find beautiful natural looks that are waterproof, scratchproof, stainproof and dentproof.

### SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	12 x 24 Floor Tile	(11-13/16" x 23-13/16") (30.00 cm x 60.48 cm)	5/16"	15.60	8
	18 x 18 Floor Tile	(17-3/4" x 17-3/4") (45.20 cm x 45.20 cm)	5/16"	17.60	8

### APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	✓
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit [daltile.com/DCOF](http://daltile.com/DCOF).

#### APPLICATION NOTES:

Suitable for exterior applications in freezing and non-freezing climates, when proper installation methods are followed.

### TRIM

Type	Number	Size	Pieces/ Carton
Bullnose	P-43F9	3 x 24	10
Cove Base	P-36C9TB	6 x 12	22
Cove Base Outcorner	PC-36C9TB	6 x 1	15

Cove base trim is intended to coordinate with floor tile in the standard 90-degree installation position.

Cove base and cove corner trim are suitable for non-freezing climates only.

### INSTALLATION

Grout Joint Recommendation	Shade Variation
<b>Floor:</b> 3/16" (Overlap should not exceed 33% when installing tile with a length 15" or greater in a staggered brick-joint pattern.)	Medium (V2)

### PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: [daltile.com/information/TestResults](http://daltile.com/information/TestResults).

### DURABILITY

#### Floor Surface Wear Resistance

1	Residential Bathrooms	3	All Residential / Light Commercial
2	All Residential Areas	④	All Residential / Commercial

### NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: [daltile.com/Factors](http://daltile.com/Factors).

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to [daltile.com/LargeTiles](http://daltile.com/LargeTiles) for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.



All or select items within this series meet the requirements for these qualifications. For more information, visit [daltile.com](http://daltile.com).









**ELEVATED ELEMENTS** FOCUSES ON GOING BACK TO THE BASICS WITH AN ASSORTMENT OF TILE THAT IS SUSTAINABLE AND SIMPLE. IN COLOR PALETTES THAT ARE TRENDING IN TODAY'S WORLD, WHILE BEING BEAUTIFULLY MINIMALISTIC TO BE PAIRED WITH OTHER DESIGN ELEMENTS FOR AN AGELESS LOOK IN ANY SPACE.





# ELEVATED

*Cements*

TIMELESS DESIGNS TO MAKE YOUR OWN



7834 C. F. Hawn Freeway | Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile products, visit our website at [www.daltile.com](http://www.daltile.com).

©2021 Daltile (5/21)