





DALTILE ONDEMAND

OnDemand offers an alluring range of in-stock and ready-to-ship tile that easily fits many styles and demands. This carefully selected assortment of neutral colors and beloved sizes makes this collection the perfect blueprint for any design.



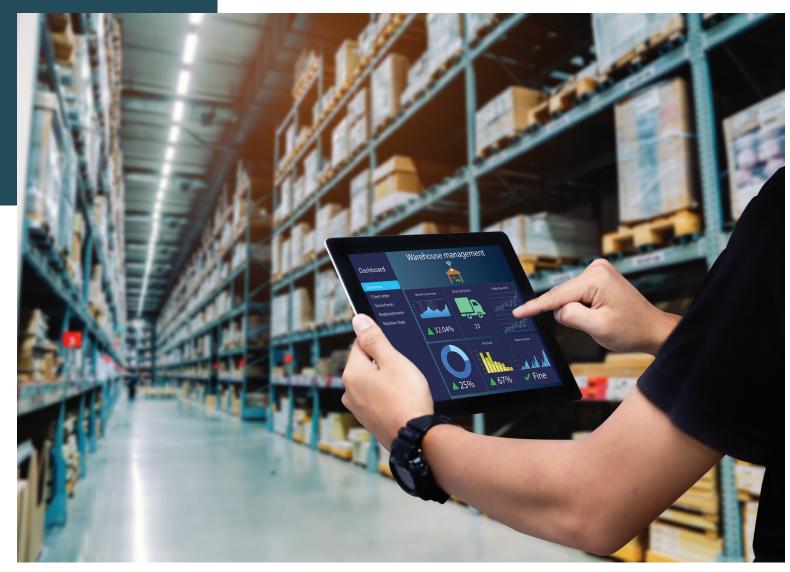



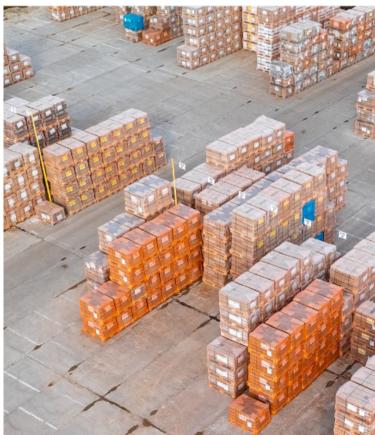

- 2



ORTFOLIO

PORTFOLIO™

An impressive palette of neutral hues creates calm monochromatic effects.

10

HAUT MONDE™

Soft sandstone in modern hues, provides the perfect canvas for creating welcoming spaces. / O L U M E 1.

14

VOLUME 1.0™

A soft cement look and handsome pressed edges will help transform any environment.

-)] (

CHORD™

Rich neutral colors in a plaster or cement visual to enhance any space.

MODULAR MINIMALISM

PORTFOLIO™

As popular as the contemporary tone-on-tone look of cement may be, it's even more appealing with the added depth and richness of the Portfolio™ series. An impressive palette of neutral hues creates calm monochromatic effects. Portfolio is an incredibly resourceful choice that's bound to be a favorite in any commercial space.





Shade Variation

| SIZES:

1 12 x 24

FINISHES: MATTE

FLOOR TILE

ICE PF01

DOVE GREY PF04





WHITE PF02







SIZES

		Thickness	Sq. Ft./ Carton	Pieces/ Carton
12 x 24 Floor Tile	(11-5/8" x 23-3/8") (29.56 cm x 59.44 cm)	5/16"	15.12/17.02	8/9

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	~
Wet & Level – Interior Floor	≥ 0.42	✓
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	~
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications in freezing and non-freezing climates, when proper installation methods are followed.

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: daltile.com/information/

TRIM

Туре	Number	Size	Pieces/ Carton
Cove Base	Р36С9ТВ	6 x 12	22

Cove base trim is intended to coordinate with floor tile in the standard 90-degree installation position.

Cove base and cove corner trim are suitable for non-freezing climates only.

INSTALLATION

Grout Joint Recommendation

1/8" (3/16" when multiple sizes are installed in a modular pattern, and/or when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.)	Random (V2)
--	-------------

DURABILITY

Floor Surface Wear Resistance					
	1	Residential Bathrooms	3	All Residential / Light Commercial	
	2	All Residential Areas	(4)	All Residential / Commercial	

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.


Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltile.com/LargeTiles for more

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.







MADE IN THE U.S.A.

All or select items within this series meet the requirements for these qualifications. For more information, visit daltile.com.



IRON GREY PF06





















CONTEMPORARY

APPEAL

HAUT MONDE™

Interpreting soft sandstone in modern hues, the Haut Monde series provides the perfect design canvas for creating welcoming spaces. While the fine grain of sandstone provides a uniform appearance, a sense of dimension adds depth of interest to Haut Monde.






COLORBODY™ PORCELAIN

| SIZES:

24 x 48 12 x 24

FLOOR

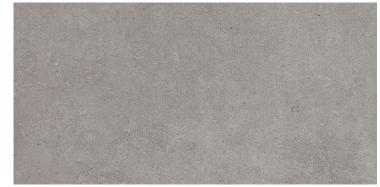



GLITTERATI GRANITE HM03

ELITE GREY HM05





EMPIRE BLACK HM06

NOBILITY WHITE HM08

SIZES

		Thickness	Sq. Ft./ Carton	Pieces/ Carton
	(23-3/8" x 46-15/16") (59.44 cm x 119.30 cm)	5/16"	15.26	2
	(11-5/8" x 23-3/8") (29.56 cm x 59.44 cm)	5/16"	17.02	9

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications in freezing and non-freezing climates, when proper installation methods are followed.







All or select items within this series meet the requirements for these qualifications. For more information, visit daltile.com.

TRIM

	Туре	Number	Size	Pieces/ Carton
	Cove Base	S36C9T	6 x 12	20

Cove base trim is intended to coordinate with floor tile in the standard 90-degree installation position.

Cove base and cove corner trim are suitable for non-freezing climates only.

INSTALLATION

Grout Joint Recommendation	Shade Variatio
1/8" (3/16" when multiple sizes are installed	

in a modular pattern, and/or when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.)



Shade Variation

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

1 Residential Bathrooms 3 All Residential / Light Commercial

2 All Residential Areas (4) All Residential / Commercial

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltile.com/LargeTiles for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.























A PERFECT GANVAS

VOLUME 1.0™

Commercial settings are sure to make ample use of versatile Volume 1.0™. This made in the USA product not only comes in a rich palette of hues but also offers our high-DCOF StepWise™ technology. With its soft cement look and handsome pressed edges, this adaptable glazed porcelain tile will help transform any environment.





Shade Variation

| SIZES:

12 x 24

FLOOR TILE





INTENSITY PEBBLE VL72





STEREO GREY VL73

SONIC WHITE VL75



Don't tip-toe through life. Step stylishly on non-slip tile that's 50% more slip resistant than ordinary tile. And because it's Daltile, you'll find beautiful natural looks that are waterproof, scratchproof, stainproof and dentproof.

SIZES

		Thickness	Sq. Ft./ Carton	Pieces/ Carton
12 x 24 Floor Tile	(11-7/8" x 23-5/8") (30.23 cm x 60.12 cm)	5/16"	17.60	9

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	~
Ramps & Inclines	≥ 0.65	✓
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications in freezing and non-freezing climates, when proper installation methods are followed.

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: daltile.com/information/ TestResults.

TRIM

Туре	Number	Size	Pieces/ Carton
Cove Base	P-36C9TB	6 x 12	22

Cove base trim is intended to coordinate with floor tile in the standard 90-degree installation position.

Cove base and cove corner trim are suitable for non-freezing

INSTALLATION

Grout Joint Recommendation

3/16" (Overlap should not exceed 33% when installing tile with a length 15" or greater in a staggered brick-joint pattern. When multiple sizes are installed in a modular pattern, please specify same size caliber at time of	Medium (V2)
--	-------------

DURABILITY

Flo	oor Surface Wear Resista		
1	Residential Bathrooms	3	All Residential / Light Commerci
2	All Residential Areas	(4)	All Residential / Commercial

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

Special consideration needs to be given when installing tiles greater $% \left(1\right) =\left(1\right) \left(1$ than 15 inches. Please refer to daltile.com/LargeTiles for more

Use of latex modified thin-set is recommended for installation. For more information, visit daltile.com







All or select items within this series meet the requirements for these qualifications. For more information, visit daltile.com.

NOTE: PLEASE SEE KEYSTONES™ SERIES FOR COORDINATING MOSAICS. VISIT DALTILE.COM/KEYSTONES. *ADDITIONAL COLORS AVAILABLE IN THE VOLUME 1.1" SERIES. FOR MORE INFORMATION, VISIT DALTILE.COM/VOLUME11.


























RESONATING



CHORD™

March to your own beat with Chord ColorBody™ Porcelain tile.

Rich neutral colors featuring a plaster graphic or a cement visual worn by time and nature to enhance any space and add harmonious composition.

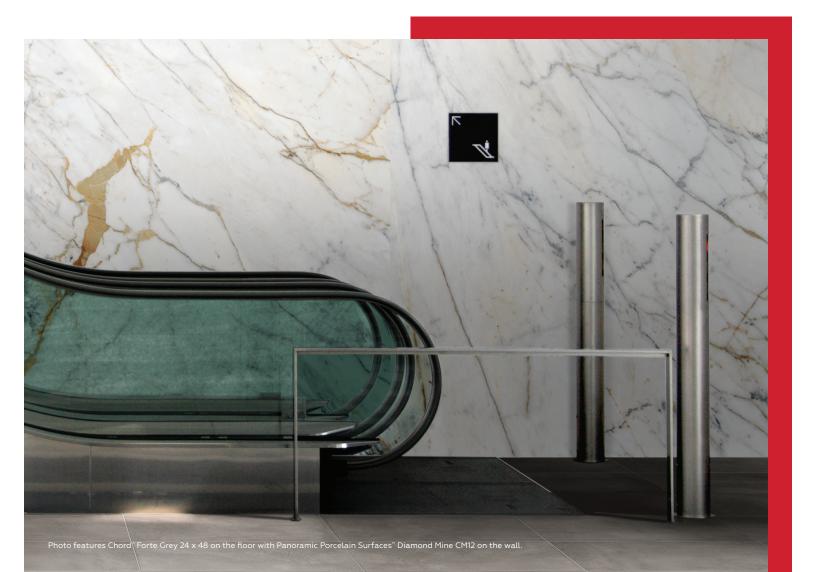



COLORBODY™ PORCELAIN

CHORD™

Shade Variation

| SIZES:

24 x 48

FLOOR TILE

PLASTER VISUAL



CANON GREY CH22

CEMENT VISUAL



FORTE GREY CH25

SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	24 x 48 Floor Tile	(23-3/8" x 46-15/16") (59.44 cm x 119.30 cm)	5/16"	15.26	2
	12 x 24 Floor Tile	(11-5/8" × 23-3/8") (29.56 cm × 59.44 cm)	5/16"	17.02	9

APPLICATIONS

Target DCOF wet	Suitable
N/A	✓
≥ 0.42	✓
≥ 0.42	
≥ 0.60	
≥ 0.65	
N/A	✓
N/A	✓
N/A	
	DCOF wet N/A ≥ 0.42 ≥ 0.42 ≥ 0.60 ≥ 0.65 N/A N/A

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications in freezing and non-freezing climates when proper installation methods are followed.

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

TRIM

Туре	Number	Size	Pieces, Cartor
Cove Base	P36C9B	6 x 12	22

Cove base trim is intended to coordinate with floor tile in the standard 90-degree installation position. Cove base and cove corner trim are suitable for non-freezing climates only.

INSTALLATION

Grout Joint Recommendation

1/8" (3/16" when installing tile	
with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.)	High (V3)

DURABILITY

Fl	oor Surface Wear Resista	ince	
1	Residential Bathrooms	3	All Residential / Light Commercia
2	All Residential Areas	(4)	All Residential / Commercial

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltile.com/LargeTiles for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.







All or select items within this series meet the requirements for these qualifications. For more information, visit daltile.com.

























