





## DALTILE ONDEMAND

OnDemand offers an alluring range of in-stock and ready-to-ship tile that easily fits many styles and demands. This carefully selected assortment of neutral colors and beloved sizes makes this collection the perfect blueprint for any design.



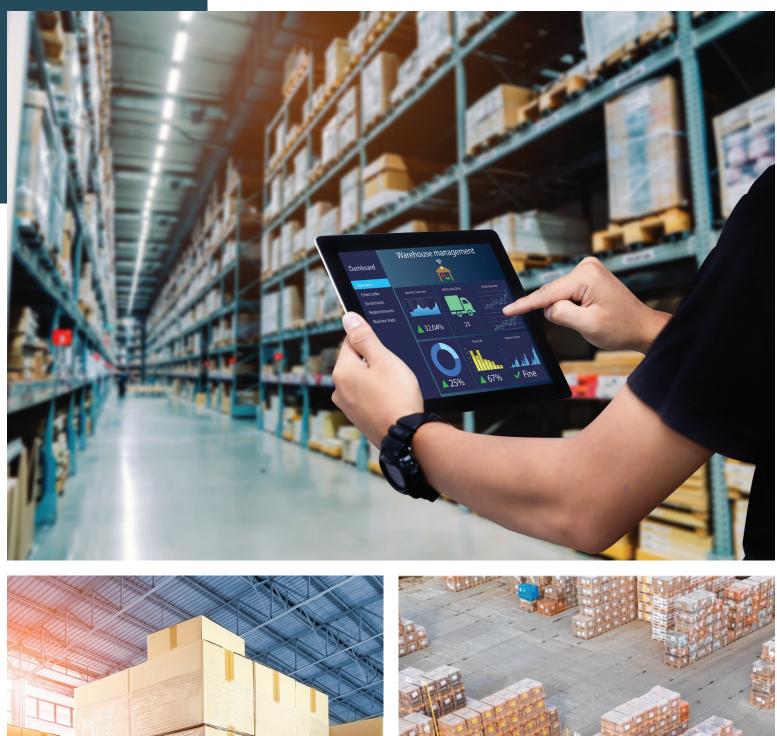



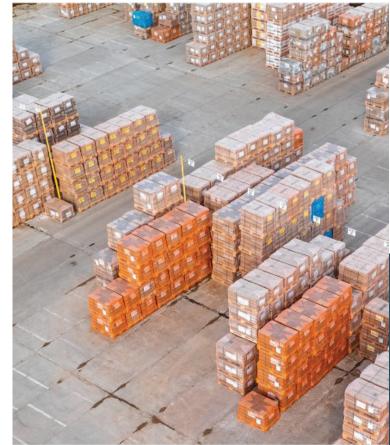



# Σ $\bigcirc$ $\mathbf{M}$ $\square$

PORTFOLIO™

An impressive palette of

neutral hues creates calm

monochromatic effects.



Σ

Ζ

 $\bigcirc$ 

Σ

 $\triangleleft$ 

 $\bot$ 

#### HAUT MONDE<sup>™</sup>

Soft sandstone in modern hues, provides the perfect canvas for creating welcoming spaces.

environment.

Σ

 $\sum$ 

 $\supset$ 

>



Σ

)

Ζ

 $\bigcirc$ 

 $\Delta$ 

 $\bot$ 

 $\bigcirc$ 

Ζ

 $\succ$ 

 $\bigcirc$ 

Σ

 $\Delta$ 

 $\bigcirc$ 

 $\Box$ 

 $\bigcirc$ 



#### VOLUME 1.0<sup>™</sup>

A soft cement look and handsome pressed edges will help transform any



#### CHORD<sup>™</sup>

Rich neutral colors in a plaster or cement visual to enhance any space.



#### **SYNCHRONIC<sup>™</sup>**

An ultra-durable and high-performing tile in an array of neutral colors in a matte finish.

# MODULAR MINIMALISM

## **PORTFOLIO**<sup>™</sup>

As popular as the contemporary tone-on-tone look of cement may be, it's even more appealing with the added depth and richness of the Portfolio<sup>™</sup> series. An impressive palette of neutral hues creates calm monochromatic effects. Portfolio is an incredibly resourceful choice that's bound to be a favorite in any commercial space.







#### FLOOR TILE



ICE PF01



DOVE GREY PF04



**IRON GREY PF06** 



ASH GREY PF05

WHITE PF02



CHARCOAL PF09

#### | SIZES: 1 12 x 24

- Floor Tile

FINISHES: MATTE

SIZES

		Thickness	Sq. Ft./ Carton
12 x 24 Floor Tile	(11-5/8" x 23-3/8") (29.56 cm x 59.44 cm)	5/16"	15.12/17.02

#### APPLICATIONS

	Target DCOF wet	Sui
Dry & Level – Interior Floor	N/A	
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors - Standard Center Drain (Residential or Light Commercial)	≥ 0.42	
Shower Floor – Linear Drain	≥ 0.60	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	
Countertops	N/A	
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest<sup>™</sup>, visit daltile.com/DCOF.

#### APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

#### PERFORMANCE CHARACTERISTICS

RCELAIN

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lb
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resista

For additional information on test results, visit us at: daltile.com/information/ TestResults.

















CLIMATEPRO<sup>™</sup>

**PORTFOLIO**<sup>™</sup>

COLORBODY<sup>™</sup> PORCELAIN FLOOR

#### TRIM

Pieces/ Carton

2 8/9

uitable

 $\checkmark$ 1

ılt

ant

RIM				
	Туре	Number	Size	Pieces/ Carton
$\square$	Cove Base	P36C9TB	6 x 12	22

Cove base trim is intended to coordinate with floor tile in the standard 90-degree installation position.

#### INSTALLATION

Grout Joint Recommendation	Shade Variation		
1/8″ (3/16″ when installing tile with a length 15″ or greater in a staggered			

brick-joint pattern; overlap should not exceed 33%.)



#### DURABILITY

Floor Surface Wear Resistance				
1	Residential Bathrooms	3	All Residential / Light Commercial	
2	All Residential Areas	4	All Residential / Commercial	

#### NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltile.com/LargeTiles for more information

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.





REVEAL IMAGING®



All or select items within this series meet the requirements for these

qualifications. For more information, visit daltile.com.



# CONTEMPORARY APPEAL


#### HAUT MONDE<sup>™</sup>

Interpreting soft sandstone in modern hues, the Haut Monde series provides the perfect design canvas for creating welcoming spaces. While the fine grain of sandstone provides a uniform appearance, a sense of dimension adds depth of interest to Haut Monde.





FLOOR

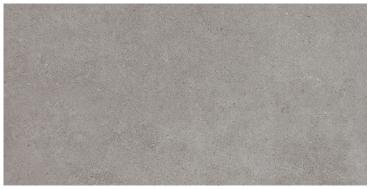

GLITTERATI GRANITE HM03



EMPIRE BLACK HM06





		Thickness	Sq. Ft./ Carton	Pieces/ Carton
	(23-3/8" x 46-15/16") (59.44 cm x 119.20 cm)	5/16"	15.26	2
12 x 24 Floor Tile	(11-5/8" x 23-3/8") (29.56 cm x 59.44 cm)	5/16"	17.02	9

#### APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	$\checkmark$
Wet & Level – Interior Floor	≥ 0.42	$\checkmark$
Shower Floors - Standard Center Drain (Residential or Light Commercial)	≥ 0.42	
Shower Floor – Linear Drain	≥ 0.60	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	~
Countertops	N/A	~
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest<sup>™</sup>, visit daltile.com/DCOF.

#### APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.





All or select items within this series meet the requirements for these qualifications. For more information, visit daltile.com.













ELITE GREY HM05

NOBILITY WHITE HM08



SIMPLICLEAN"







VISIT THE WHY TILE PAGE AT WWW.DALTILE.COM FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

12

## HAUT MONDE<sup>™</sup>

COLORBODY<sup>™</sup> PORCELAIN

#### TRIM

	Туре	Number	Size	Pieces/ Carton
$\square$	Cove Base	S36C9	6 x 12	22

Cove base trim is intended to coordinate with floor tile in the standard 90-degree installation position.

#### INSTALLATION

Grout Joint Recommendation	Shade Variation	
1/8" (3/16" when multiple sizes are installed in a modular pattern, and/or when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.)	High (V3)	

#### PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

#### DURABILITY

Floor Surface Wear Resistance					
1	Residential Bathrooms	3	All Residential / Light Commercial		
2	All Residential Areas	4	All Residential / Commercial		

#### NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltile.com/LargeTiles for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.





#### VOLUME 1.0<sup>™</sup>

Commercial settings are sure to make ample use of versatile Volume 1.0<sup>™</sup>. This made in the U.S.A product not only comes in a rich palette of hues but also offers our high-DCOF StepWise<sup>™</sup> technology. With its soft cement look and handsome pressed edges, this adaptable glazed porcelain tile will help transform any environment.





VOLUME 1.0<sup>™</sup> GLAZED PORCELAIN

#### FLOOR TILE



| SIZES:

12 x 24 Floor Tile

12 x 12 Floor Tile


SHES: MATTE

DEGREES SILVER VL71



STEREO GREY VL73



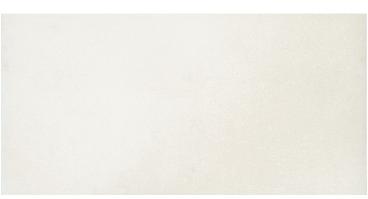

SONIC WHITE VL75

NOTE: PLEASE SEE KEYSTONES<sup>™</sup> SERIES FOR COORDINATING MOSAICS. VISIT DALTILE.COM/KEYSTONES. FOR MORE INFORMATION, VISIT DALTILE.COM/VOLUME11.













SCRATCH-RESISTANT FIRE-RESISTANT INDOOR/OUTDOOR

SIMPLICLEAN"



Don't tip-toe through life. Step stylishly on non-slip tile that's 50% more slip resistant than ordinary tile. And because it's Daltile, you'll find beautiful natural looks that are waterproof, scratchproof, stainproof and dentproof.

SIZES			
			Thickness Sq. Ft./ Carton
	12 x 24 Floor Tile	(11-7/8" x 23-5/8") (30.23 cm x 60.12 cm)	5/16" 17.60
	12 x 12 Floor Tile	(11-7/8" × 11-7/8") (30.23 cm × 30.23 cm)	5/16" 16.72

#### APPLICATIONS

	Target DCOF wet	Su
Dry & Level – Interior Floor	N/A	
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors - Standard Center Drain (Residential or Light Commercial)	≥ 0.42	
Shower Floor – Linear Drain	≥ 0.60	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	
Countertops	N/A	
Pool Linings	N/A	

A DCOF value of  $\geq$ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

#### APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

#### PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: daltile.com/information/ TestResults.





VISIT THE WHY TILE PAGE AT WWW.DALTILE.COM FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

#### VOLUME 1.0<sup>™</sup> GLAZED PORCELAIN

	Туре	Number	Size	Pieces/ Carton
$\square$	Cove Base	P-36C9TB	6 x 12	22

Cove base trim is intended to coordinate with floor tile in the standard 90-degree installation position.

#### INSTALLATION

Floor Surface Wear Resistance

NOTES

standards.

daltile.com/Factors.

installation.

information.

TRIM

Grout Joint Recommendation	Shade Variation
3/16" (Overlap should not exceed 33% when installing tile with a length 15" or greater in a staggered brick-joint pattern. When multiple sizes are installed in a modular pattern, please specify same size caliber at time of order.)	Medium (V2)
DURABILITY	

1 Residential Bathrooms 3 All Residential / Light Commercial 2 All Residential Areas (4) All Residential / Commercial

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1

Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection. For additional information refer to "Factors to Consider" at:

To achieve optimal results, all tile should be selected from multiple

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltile.com/LargeTiles for more

cartons and shading and graphic arrangement planned prior to

Use of latex modified thin-set is recommended for installation.

Pieces/ Carton

9

17

uitable

$\checkmark$	
$\checkmark$	
$\checkmark$	
~	
$\checkmark$	
$\checkmark$	
$\checkmark$	

Result	



For more information, visit daltile.com




All or select items within this series meet the requirements for these gualifications. For more information, visit daltile.com.



# RESONATING DEPTH

#### CHORD<sup>™</sup>

March to your own beat with Chord ColorBody<sup>™</sup> Porcelain tile. Rich neutral colors featuring a plaster graphic or a cement visual worn by time and nature to enhance any space and add harmonious composition.

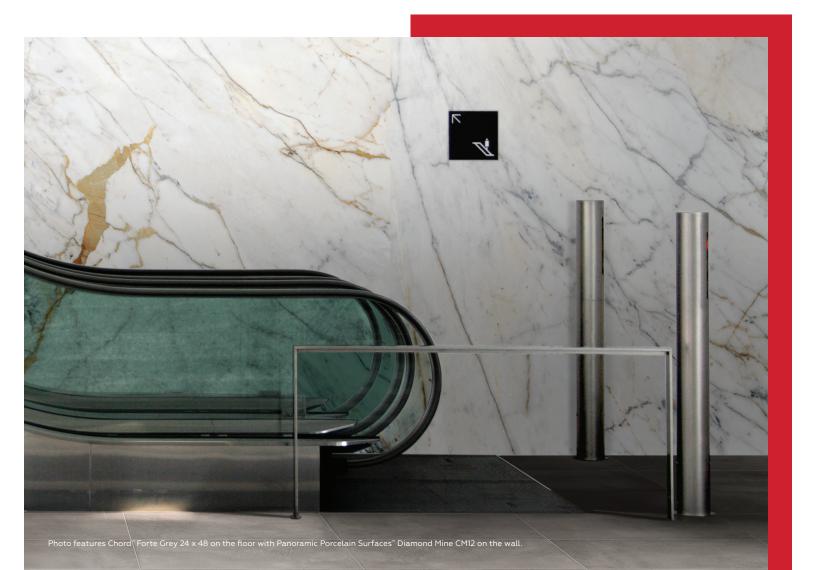



#### FLOOR TILE

PLASTER VISUAL



CANON GREY CH22

CEMENT VISUAL



| SIZES:

24 x 48

Floor Tile

12 x 24

\_\_\_\_\_ Floor Tile

FINISHES: MATTE

FORTE GREY CH25

SIZES

		Thickness	Sq. Ft./ Carton
24 x 48 Floor Tile	(23-3/8" x 46-15/16") (59.44 cm x 119.20 cm)	5/16"	15.26
12 x 24 Floor Tile	(11-5/8" x 23-3/8") (29.56 cm x 59.44 cm)	5/16"	17.02

#### APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	$\checkmark$
Wet & Level – Interior Floor	≥ 0.42	$\checkmark$
Shower Floors - Standard Center Drain (Residential or Light Commercial)	≥ 0.42	
Shower Floor – Linear Drain	≥ 0.60	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	~
Countertops	N/A	~
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest<sup>™</sup>, visit daltile.com/DCOF.

#### APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

#### PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.





WATERPROOF









CLIMATEPRO<sup>™</sup>

SIMPLICLEAN™





#### CHORD<sup>™</sup> COLORBODY<sup>™</sup> PORCELAIN

#### TRIM

Pieces/

Carton

2

9

Туре	Number	Size	Pieces/ Carton
Cove Base	P36C9	6 x 12	22

Cove base trim is intended to coordinate with floor tile in the standard 90-degree installation position.

#### INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8" (3/16" when multiple sizes are installed in a modular pattern, and/or when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.)	High (V3)

#### DURABILITY

Floor Surface Wear Resistance					
1	Residential Bathrooms	3	All Residential / Light Commercial		
2	All Residential Areas	4	All Residential / Commercial		

#### NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltile.com/LargeTiles for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.





REVEAL IMAGING®




All or select items within this series meet the requirements for these qualifications. For more information, visit daltile.com.




# PEAK Performance

## SYNCHRONIC<sup>™</sup>

Explore new terrain with Synchronic<sup>™</sup>, an ultra-durable and high-performing ColorBody<sup>™</sup> porcelain tile. An array of neutral colors in a matte finish. Proudly made in the U.S.A. and rectified, Synchronic delivers a minimalistic concrete look with quality and style.

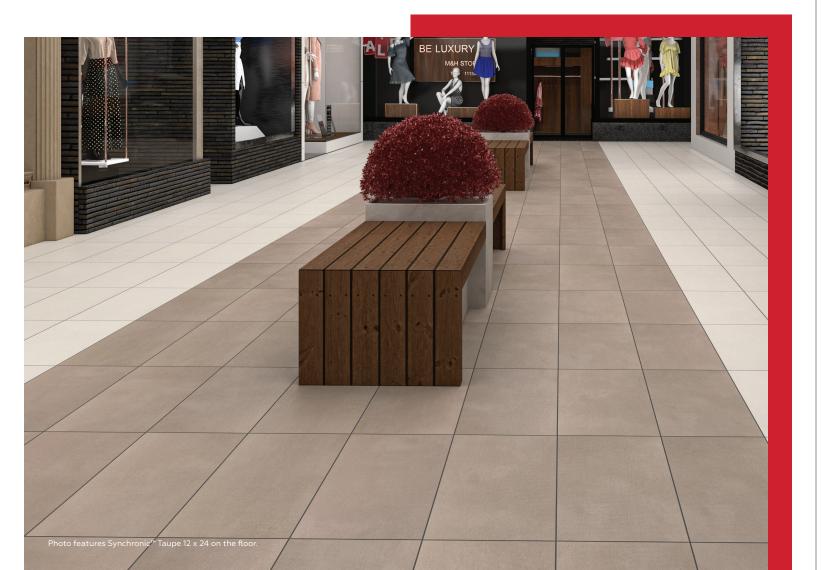

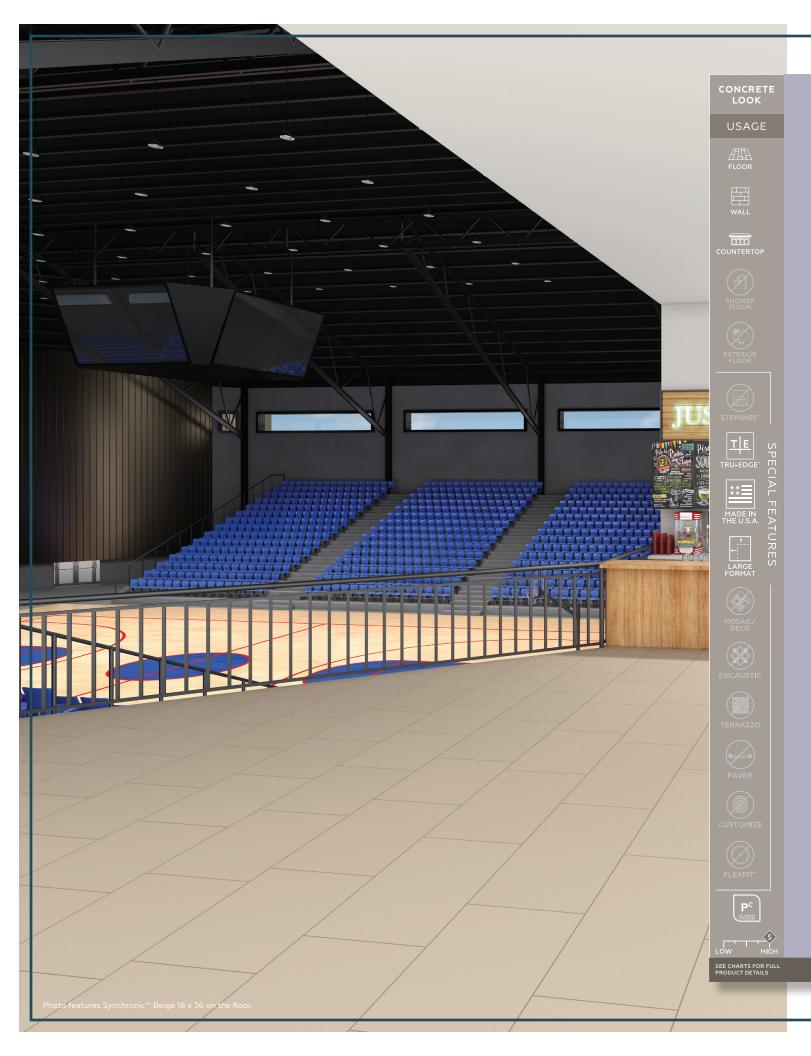

#### **SYNCHRONIC**<sup>™</sup> COLORBODY<sup>™</sup> PORCELAIN

#### FLOOR TILE - MATTE



BEIGE SY31



TAUPE SY32



GREY SY33



SIZES

		Thickness	Sq. Ft./ Carton
12 x 24 Floor Tile	(11-5/8" x 23-3/8") (29.56 cm x 59.44 cm)	5/16"	17.02

#### APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	$\checkmark$
Wet & Level – Interior Floor	≥ 0.42	~
Shower Floors - Standard Center Drain (Residential or Light Commercial)	≥ 0.42	
Shower Floor – Linear Drain	≥ 0.60	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	~
Countertops	N/A	<ul> <li>Image: A second s</li></ul>
Pool Linings	N/A	

A DCOF value of  $\geq$ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

#### APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

#### PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lb
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resista

For additional information on test results, visit us at: daltile.com/information/TestResults.





WATERPROOF









SCRATCH-RESISTANT FIRE-RESISTANT CLIMATEPRO<sup>™</sup> SIMPLICLEAN™







## **SYNCHRONIC**<sup>™</sup>

COLORBODY<sup>™</sup> PORCELAIN

,

#### TRIM

Pieces/	
Carton	

9	

#### lt

%

lbs

ant

KIPI	
	Tuno

	Туре	Number	Size	Pieces/ Carton
$\square$	Cove Base	P36C9	6 x 12	22

Cove base trim is intended to coordinate with floor tile in the standard 90-degree installation position.

#### INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8" (3/16" when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.)	Medium (V2

#### DURABILITY

Floor Surface Wear Resistance				
1	Residential Bathrooms	3	All Residential / Light Commercial	
2	All Residential Areas	4	All Residential / Commercial	

#### NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltile.com/LargeTiles for more information

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.







#### REVEAL IMAGING®

All or select items within this series meet the requirements for these qualifications. For more information, visit daltile.com



# N daltile ON DEMAND





To view the complete collection of Daltile products, visit our website at www.daltile.com.

©2024 Daltile (02/24)