SPECIAL ORDER PROGRAM

# COLOR WHEEL" LINEAR

<b>√</b> ••	<b>*</b>	**			
	4 <b>m</b>	9 <b>क</b>		Ţ	

COLOR WHEEL™ LINEAR IS THE VIBRANT COLLECTION OF PIGMENTED HUES THAT DESIGNERS KNOW AND LOVE AND NOW, OUR MOST COVETED ACCENT COLORS ARE AVAILABLE IN MATTE THROUGH THE SPECIAL ORDER PROGRAM. SELECT FROM THE EIGHT RICH JEWEL TONES TO CREATE A CUSTOM PALETTE IN POPULAR LINEAR SIZE OPTIONS.

MOSAIC/ DECO

ENCAUSTIC

TERRAZZO

PAVER

CUSTOMIZE

FLEXFIT"


SEE CHARTS FOR FULL PRODUCT DETAILS.

 $C^{G}$ 

HIGH

## COLOR WHEEL<sup>™</sup> LINEAR

SPECIAL ORDER PROGRAM

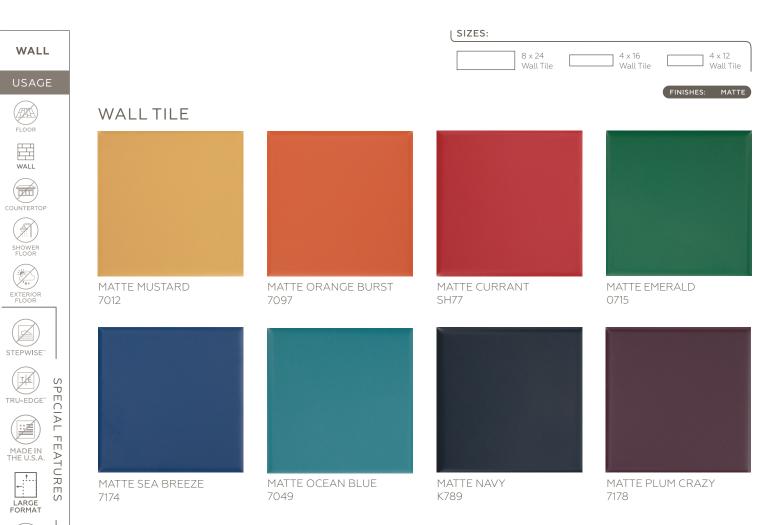

NOTE: SPECIAL ORDER PROGRAM LEAD TIME IS 4 - 5 WEEKS.









### COLOR WHEEL<sup>™</sup> LINEAR

SPECIAL ORDER PROGRAM

SIZES					
			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	8 x 24 Wall Tile	(8" x 24") (20.34 cm x 61.03 cm)	3/8" (9.30 mm)	13.30	10
	4 x 16 Wall Tile	(4" x 16") (10.17 cm x 40.68 cm)	3/8" (9.30 mm)	13.20	30
	4 x 12 Wall Tile	(4-1/4" x 12-7/8") (10.91 cm x 32.77 cm)	5/16" (7.90 mm)	10.64	28

#### APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	$\checkmark$
Countertops	N/A	
Pool Linings	N/A	
Walls/Backsplashes Countertops	N/A N/A	~

A DCOF value of  $\geq$  0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest<sup>™</sup>, visit daltile.com/DCOF.

#### APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

#### LRV & MUNSELL

Color #	LRV Illuminate-OBS: F02-02 (CWF)	Munsell
MATTE		
0715 MATTE EMERALD	12.7	4.10 4.3/4.4
7012 MATTE MUSTARD	48.2	9.8YR 7.2/6.9
7049 MATTE OCEAN BLUE	18.2	2.0B 5.0/4.6
7097 MATTE ORANGE BURST	26.8	10.0R 5.5/10.1
7174 MATTE SEA BREEZE	9.3	5.8PB 3.7/5.6
7178 MATTE PLUM CRAZY	7.9	4.4RP 3.3/1.8
K789 MATTE NAVY	6.0	5.1PB 2.9/1.2
SH77 MATTE CURRANT	15.1	4.7R 4.6/10.9

#### TRIM

		Thickness	Pieces/ Carton
S1/212J / 1/2 x 12	(1/2" x 11-15/16")	1/4"	12
Jolly	(1.29 cm x 30.36 cm)	(7.23 mm)	

#### INSTALLATION

#### Grout Joint Recommendation

8 x 24: 1/16" (1/8" when rectangular size is installed in a staggered brick-joint pattern; overlap should not exceed 33%.) 4 x 12 & 4 x 16: 1/16" (When rectangular size is installed in a staggered brick joint pattern, overlap should not exceed 33%.)



Shade Variation

#### PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 20.0%
Breaking Strength	C648	120-230 lbs
Scratch Hardness	MOHS	4.0-6.0
Chemical Resistance	C650	Resistant
Abrasion Resistance	C1027	N/A

For additional information on test results, visit us at: daltile.com/information/TestResults.

#### NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.





All or select items within this series meet the requirements for these qualifications. For more information, visit daltile.com.





LEARN MORE

7834 C.F. Hawn Freeway, Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at daltile.com.

