



6 X 48 WOOD LOOK PLANKS



WHITE ASH CY30



COASTAL GREY CY31



BARNWOOD CY34




HONEY MAPLE CY32



EARLY AMERICAN CY33



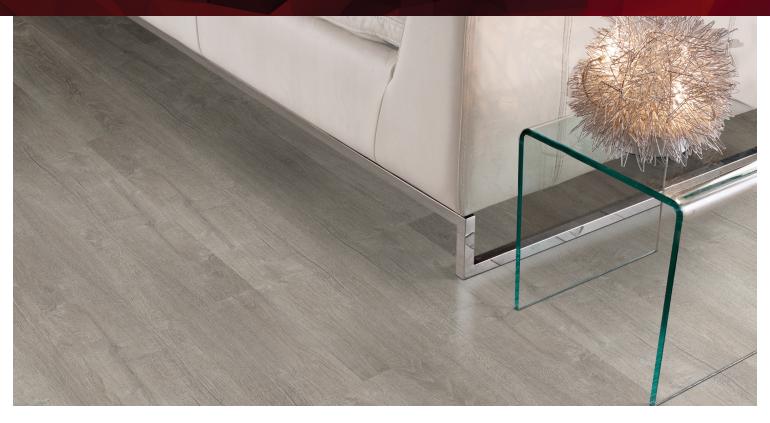

DESIGN & SIZE

Product Type: Glue Down LVF

Thickness: 2.0 mm

Wear Layer: 12 Mil (0.3048 mm)

Finish: Enhanced Urethane

Size (nominal): 6" W x 48" L Plank

Size (actual): 152.4 mm x 1,219.2 mm

Packaging: 54 sq. ft. per carton / 27 pieces per carton

Weight: 1.35 lbs per piece / 37.7 lbs per carton Installation & Glue down and install using ProSeries

Adhesive: by Daltile Adhesive; see daltile.com/LVF for more recommended installation and

adhesive information

SERVICE

Warranties: Limited 6 Year Light Commercial Limited 15 Year Residential

PERFORMANCE & CHARACTERISTICS

Construction: Commercial Grade Luxury Vinyl Flooring;

100% Virgin

Classification: ASTM F1700 - Class III, Type A - Smooth,

Type B - Embossed

Squareness: ASTM F2421 - Passes - ±0.010" max
Size and Tolerance: ASTM F2421 - Passes - ±0.016 in. / linear

foot

Thickness: ASTM F386 - Passes - as specified ±0.005 in

Flexibility: ASTM F137 - Passes - 1" mandrel

Dimensional Stability: ASTM F2199 - Passes - 0.020 in. / linear foot

IIIax

Static Load Limit: ASTM F970 - Passes, modified at 1000 psi

Residual Indentation: ASTM F1914 - Passes - Average less than 8%

maximum single reading 10%

Resistance To Chemicals: ASTM F925 - Passes - No more than a slight

change

Resistance To Light: ASTM F1515 - Passes - $\Delta E \le 8$ Resistance To Heat: ASTM F1514 - Passes - $\Delta E \le 8$

Critical Radiant Flux: ASTM E648 - Class 1 (> 0.45 W/cm²)

Smoke Density: ASTM E662 Part A - Passes - < 450

Smoke Density: ASTM E662 - Passes



7834 C.F. Hawn Freeway, Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at daltile.com/LVF

