

SLAB

USAGE



FLOOR



WALL



COUNTERTOP



SHOWER
FLOOR



EXTERIOR
FLOOR



STEPWISE™



TRU-EDGE™



MADE IN
THE USA WITH
IMPORTED
MATERIAL



LARGE
FORMAT



MOSAIC/
DECO



ENCAUSTIC



TERRAZZO



PAVER



CUSTOMIZE



FLEXFIT™



QUARTZ

LOW HIGH

SPECIAL FEATURES



ARCHES OQ33



NIAGARA OQ32



ROCKY MOUNTAIN OQ34



GOLDEN GATE OQ37

SLAB

USAGE



FLOOR



WALL



COUNTERTOP



SHOWER
FLOOR



EXTERIOR
FLOOR



STEPWISE™



TRU-EDGE™



MADE IN
THE USA WITH
IMPORTED
MATERIAL



LARGE
FORMAT



MOSAIC/
DECO



ENCAUSTIC



TERRAZZO



PAVER



CUSTOMIZE



FLEXFIT™




QUARTZ

LOW HIGH

SEE CHARTS FOR FULL
PRODUCT DETAILS

SPECIAL FEATURES

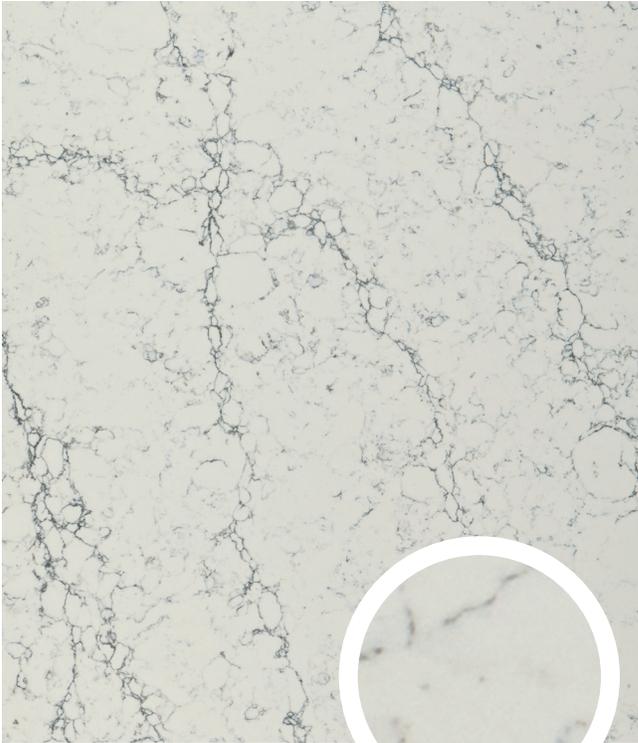

RUSHMORE OQ41



FREEDOM CALACATTA OQ42



WASHINGTON OQ43



LIBERTY CALACATTA OQ44

SLAB

USAGE



FLOOR



WALL



COUNTERTOP



SHOWER
FLOOR



EXTERIOR
FLOOR



STEPWISE™



TRU-EDGE™



MADE IN
THE USA WITH
IMPORTED
MATERIAL



LARGE
FORMAT



MOSAIC/
DECO



ENCAUSTIC



TERRAZZO



PAVER



CUSTOMIZE



FLEXFIT™




QUARTZ

LOW HIGH

SEE CHARTS FOR FULL
PRODUCT DETAILS

SPECIAL FEATURES

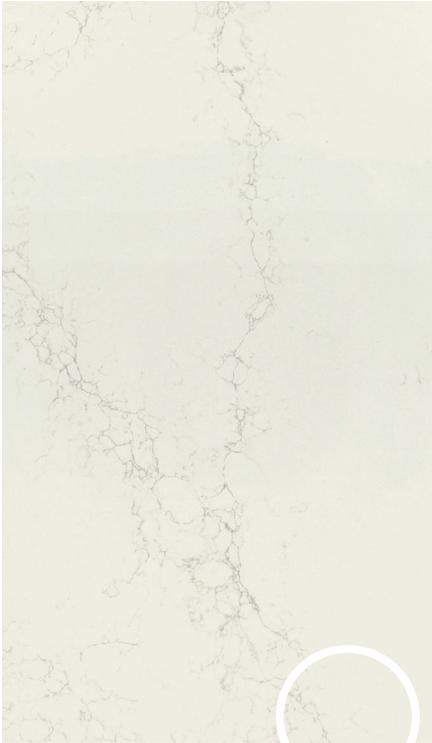

LIBERTY
GOLD OQ45



PATRIOTIC
CALACATTA OQ47



INDEPENDENCE
CALACATTA OQ48



STATUARY UNITY OQ53



STATUARY GLORY OQ52

PRODUCT INFORMATION

Finish	Actual Size	Thickness
Polished	135-7/8" x 78-3/4" (345 cm x 200 cm)	1-1/4" (3 cm) & 3/4" (2 cm)

Custom slab finishes in honed and leather are available by special order.

Not all colors available in alternative finishes. Please contact your local slab center for availability.

Thinner slabs available upon request. Please contact your local slab center to confirm sizes and availability.

Standard tile sizes available by special order only where applicable.

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	

ONE Quartz Surfaces do not meet minimum coefficient of friction thresholds recommended by safety standard-setting organizations. Water, oil, grease, etc., create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection.

APPLICATION NOTES:

Historic Series and National Marble Series not suitable for exterior applications due to small resin content. The sun will etch the material.



Twenty Five Year Commercial Limited Warranty, visit daltile.com for complete warranty details.



Lifetime Residential Limited Warranty, visit daltile.com for complete warranty details.



MADE IN THE USA WITH IMPORTED MATERIAL.



To See Approved Colors, Please Check The Below Link:
info.nsf.org/Certified/Food/Listings.asp?Company=C0536133&Standard=051

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/16"	Medium (V2)

NOTES

ONE Quartz Surfaces products are nonporous, reducing the potential for bacteria growth, resist common food stains and are stronger than natural granite.

ONE Quartz Surfaces products are virtually maintenance free.

ONE Quartz Surfaces products contain natural quartz stone providing consistent color and visual movement. A wide range of color options allow for more design freedom.

ONE Quartz Surfaces products have a durable, scratch-resistant surface.

ONE Quartz Surfaces products are heat and scorch-resistant under normal cooking conditions (use of a trivet is recommended for longer or extreme heat exposure).

Visit www.daltile.com/countertops-product-category/one-quartz for additional polished, honed and leather finish details.

Twenty-Five year limited warranty. Visit daltile.com/ONEQuartz for details.

White thin-set or mortar is recommended for the lighter colors of ONE Quartz Surfaces tiles.

For information refer to "Factors to Consider" at daltile.com/Factors.

SLAB PERFORMANCE CHARACTERISTICS

	Test Method	Average Result*
Abrasion Wear Index	ASTM C501	≥ 135
Bulk Specific Gravity	ASTM C97	≤ 2500 kg / cubic meter
Chemical Resistance	ASTM C650	Resistant to typical household cleaners
Coefficient of Thermal Expansion	ASTM C531	≤ 4.0E-05 mm/mm C
Flexural Strength	ASTM C880	≥ 35 MPa
Water Absorption	ASTM C97	≤ 0.10%
Scratch Resistance (Mohs Hardness)	ASTM C1895	≥ 5
Stain Resistance	ANSI Z124.6	Pass
Thermal Shock Resistance	ASTM C484	Pass – No Effect

* Custom testing results by color are available upon request.