
ELECTRIC[™] CAST METAL / CAST STONE

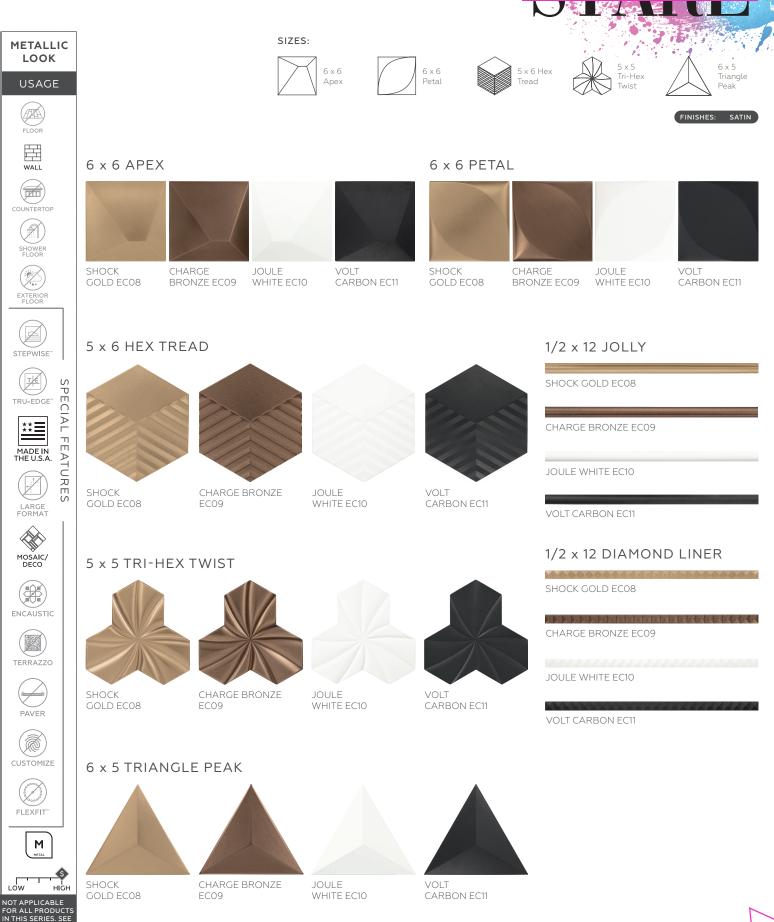

SIZES				
			Thickness	Pieces/ Carton
	6 x 6 Apex*	(6" x 6") (15.24 cm x 15.24 cm)	1/4"	40
	6 x 6 Petal	(6" x 6") (15.24 cm x 15.24 cm)	1/4"	40
	5 x 6 Hex Tread	(5-1/4" x 6") (13.33 cm x 15.24 cm)	1/4"	24
		(5-1/2" x 5-3/4") (13.97 cm x 14.60 cm)	1/4"	30
	6 x 5 Triangle Peak	(6" x 5-1/4") (15.24 cm x 13.33 cm)	1/4"	36

* Two unique faces in box, as shown with the difference in EC09 and EC10

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	~
Countertops	N/A	
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest[™], visit daltile.com/DCOF.

APPLICATION NOTES:

For interior use only.

Product can be installed in wet areas such as backsplashes, bathroom walls and shower enclosures, but are not recommended in areas with swimming pools or hot tubs because pool chemicals may harm the protective coating.

TRIM	44			
	Туре	Number	Size	Pieces/ Carton
	Liner	D1A/212	1/2 x 12	36
	12" Jolly	S1/212J	1/2 x 12	12

CAST METAL

INSTALLATION

Martiner () (2)
Medium (V2) EC08/09
Low (V1) EC10/11

NOTES

Due to the handcrafted nature of Electric, variations in structure can be expected and are intended to add to the visual interest of this artisan product. Special care should be used in installation; see installation instructions for details. For additional information refer to "Factors to Consider" at: daltile.com/Factors.

This collection is permanently protected by Q-Seal: Stain and scratch resistant, antimicrobial.







LEARN MORE

7834 C.F. Hawn Freeway, Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at **daltile.com**.

