

COLOR WHEEL™



PATTERN GUIDE

Available Colors & Finishes

SEMI-GLOSS

					
WHITE 0100 (1)	ARCTIC WHITE 0190 (1)	BISCUIT K175 (1)	ALMOND 0135 (1)	URBAN PUTTY 0161 (2)	ARCHITECTURAL GRAY 0109 (2)
					
ELEMENTAL TAN 0166 (2)	ARTISAN BROWN 0144 (2)	DESERT GRAY X114 (1)	SUEDE GRAY 0182 (2)	CHALKBOARD 0180 (2)	BLACK K111 (2)

MATTE


					
MATTE ARCTIC WHITE 0790 (1)	MATTE BISCUIT K775 (1)	MATTE ALMOND X735 (1)	MATTE URBAN PUTTY 0761 (2)	MATTE ARCHITECTURAL GRAY 0709 (2)	
					
MATTE ELEMENTAL TAN 0766 (2)	MATTE ARTISAN BROWN 0744 (2)	MATTE DESERT GRAY X714 (1)	MATTE SUEDE GRAY 0782 (2)	MATTE CHALKBOARD 0780 (2)	MATTE BLACK K711 (2)

ACCENT*


					
CORNSILK 0160 (3)	MUSTARD 1012 (3)	SUNFLOWER DH50 (3)	ORANGE BURST 1097 (3)	CURRANT SH17 (3)	PLUM CRAZY 1178 (3)
					
SPA 0148 (3)	GARDEN SPOT 0141 (3)	KEY LIME 1098 (3)	ELECTRIC BLUE 1194 (3)	COBALT DM14 (3)*	WOOD VIOLET 1467 (3)
					
WATERFALL 0169 (3)	EMERALD 0115 (3)	OCEAN BLUE 1049 (3)	SEA BREEZE 1174 (3)	GALAXY 1469 (3)	NAVY K189 (3)

* Accent available in Semi-Gloss finish only. † Subject to crazing; black grout not recommended
(1), (2) and (3) indicate price groups. (1) being the least expensive.


Standard Patterns

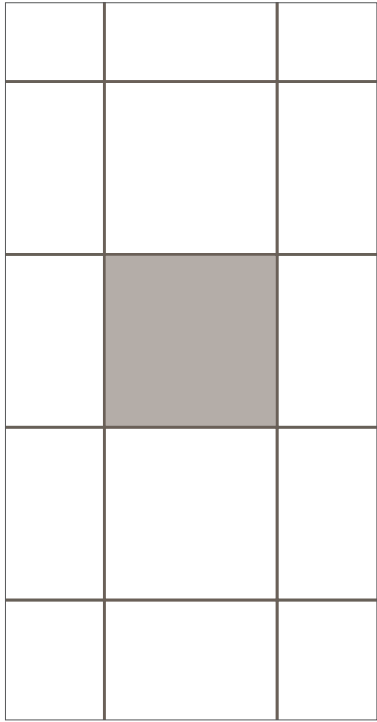


6 x 6 or 4 x 4

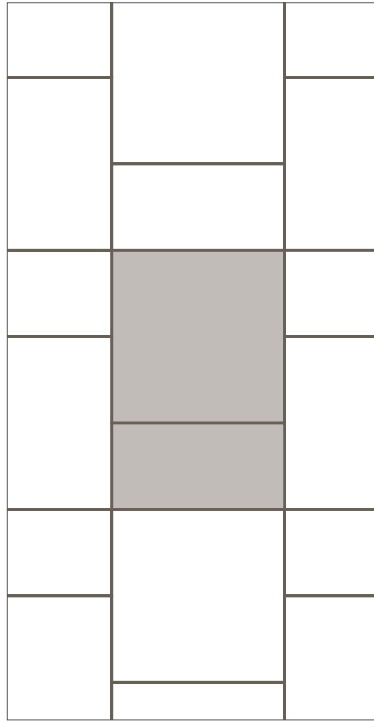


6 x 6 | 3 x 6

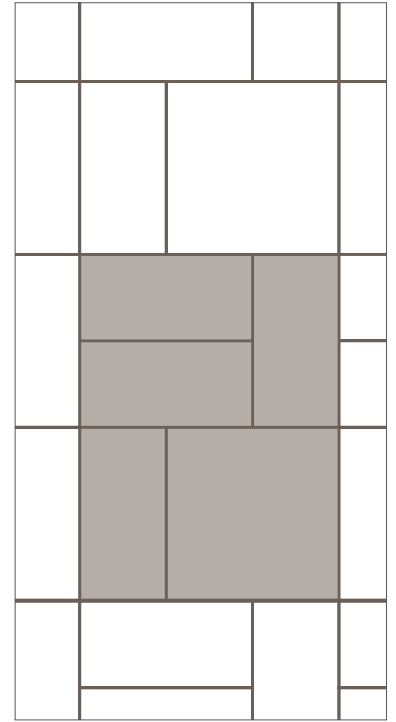


6 x 6 | 3 x 6

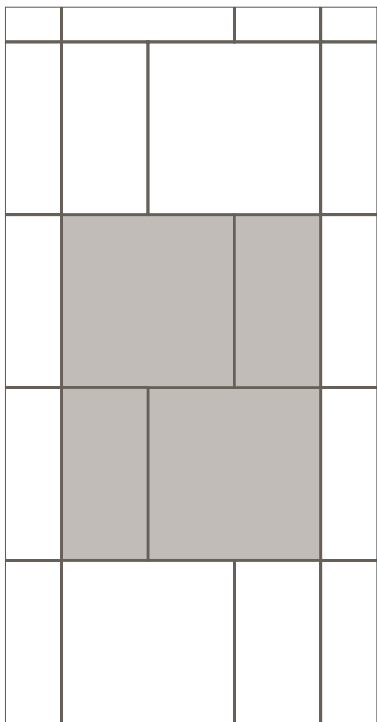

6 x 6 | 3 x 6

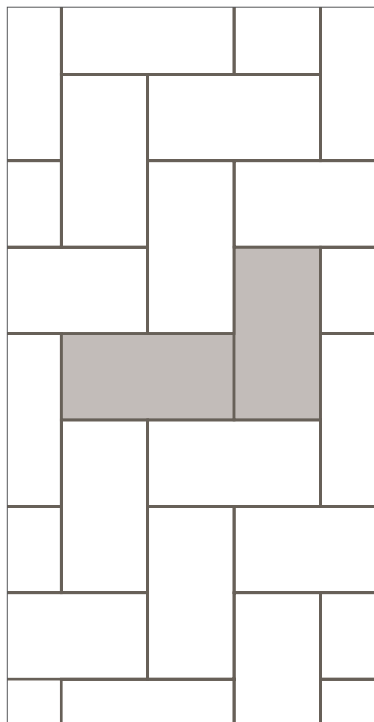


3 x 6

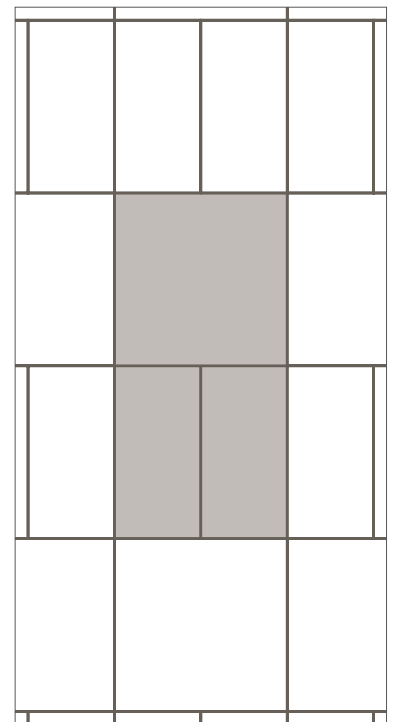


6 x 6 | 3 x 6


Standard Patterns

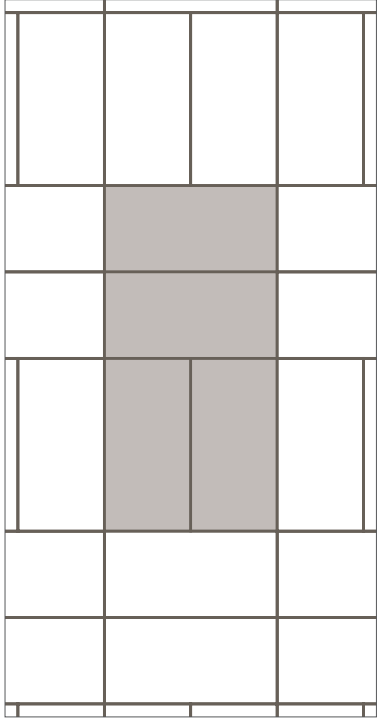


3 x 6

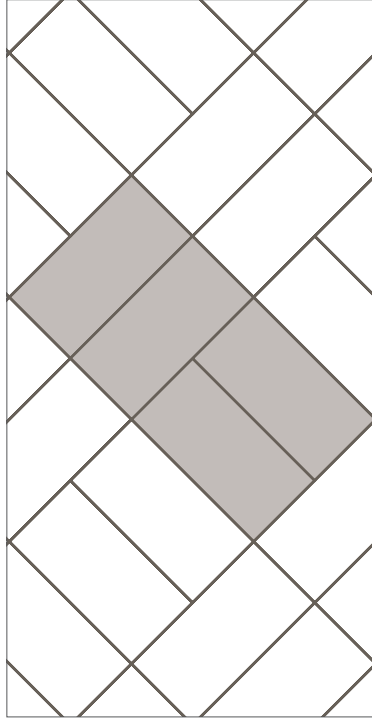


3 x 6

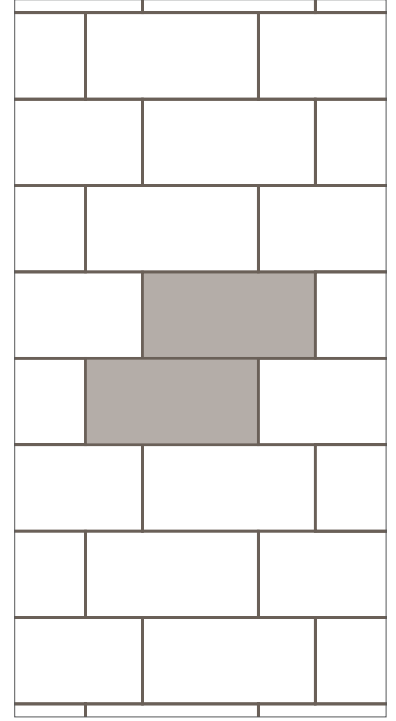


3 x 6

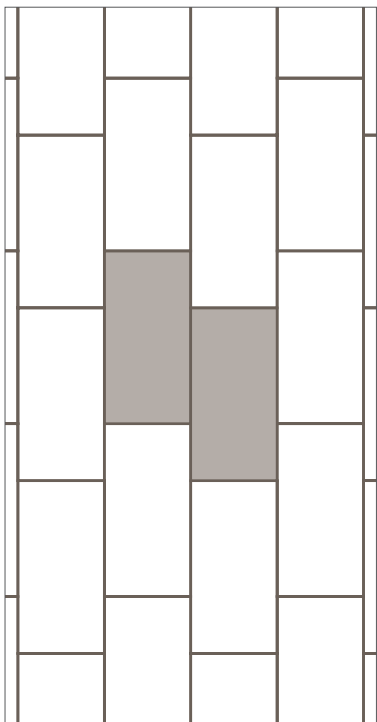

3 x 6

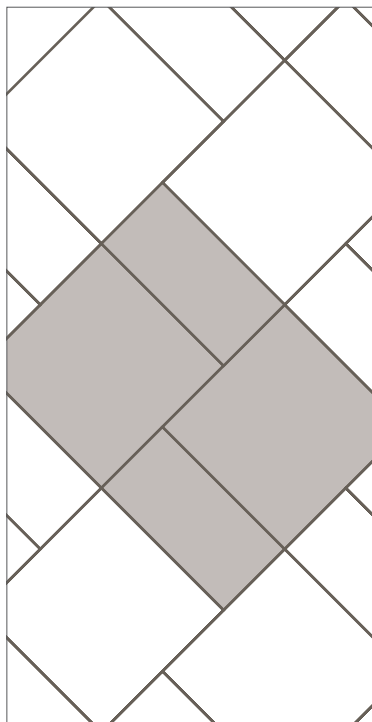


6 x 6 | 3 x 6

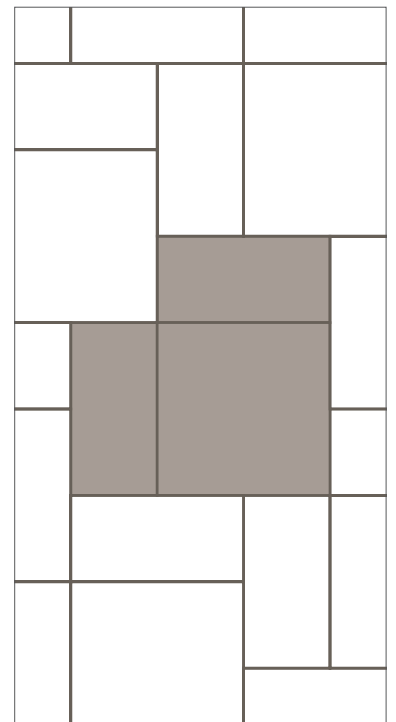


6 x 6 | 3 x 6


Standard Patterns

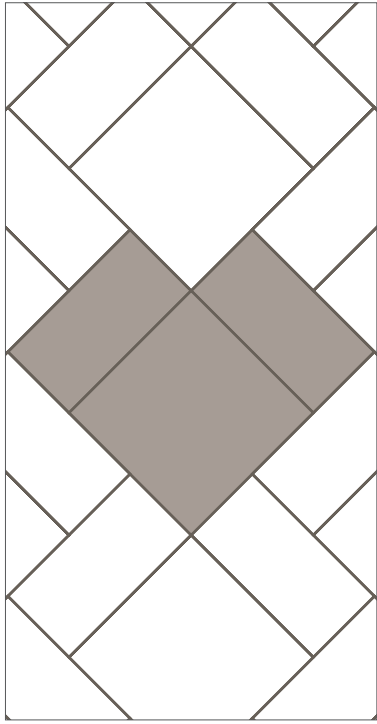


6 x 6 | 3 x 6

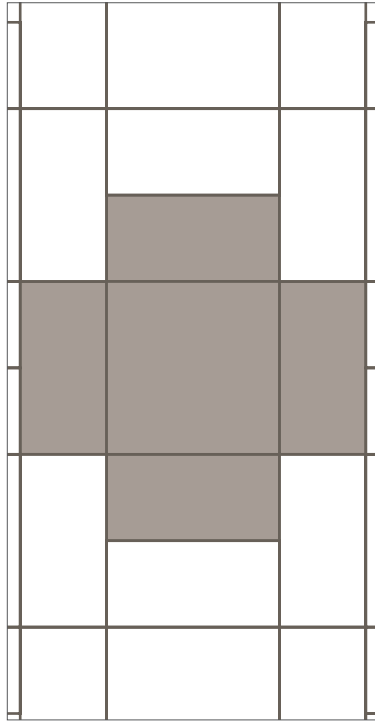


6 x 6 | 3 x 6

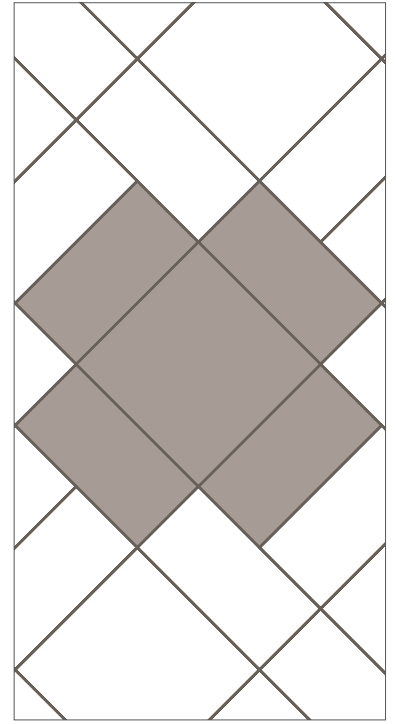


6 x 6 | 3 x 6

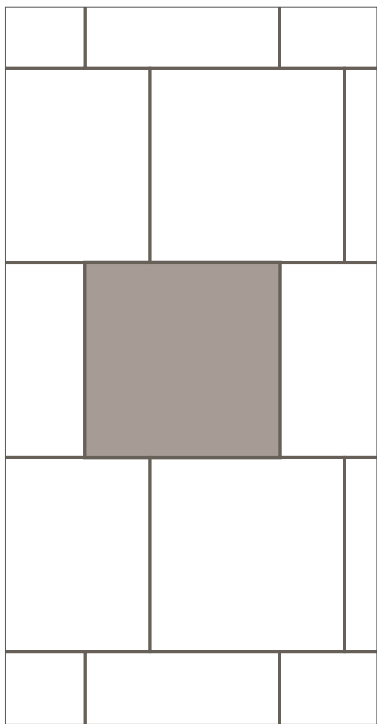

6 x 6

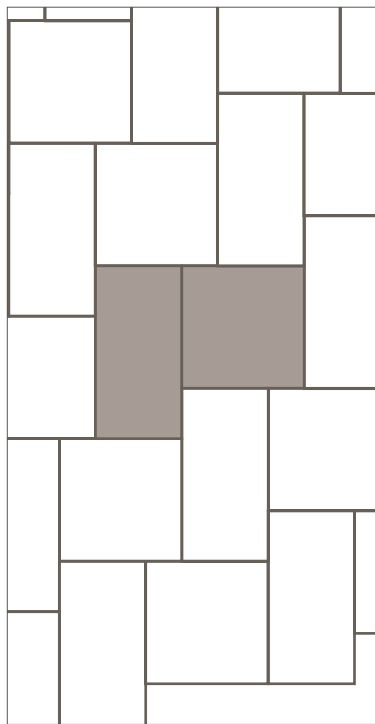


3 x 6 | 4 x 4

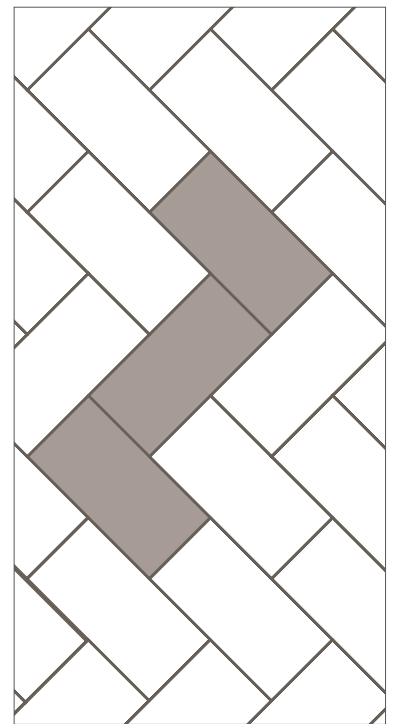


3 x 6


Standard Patterns

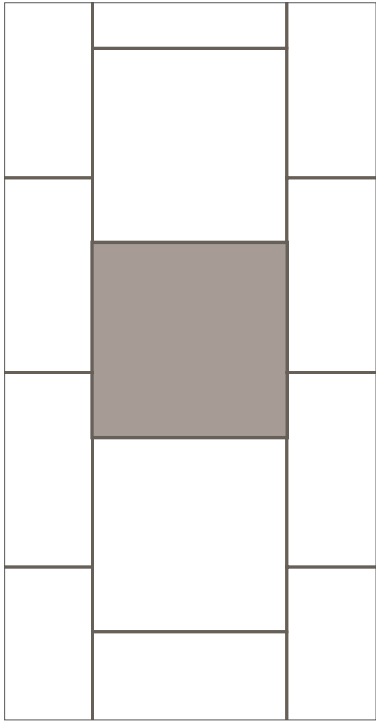


6 x 6 | 3 x 6

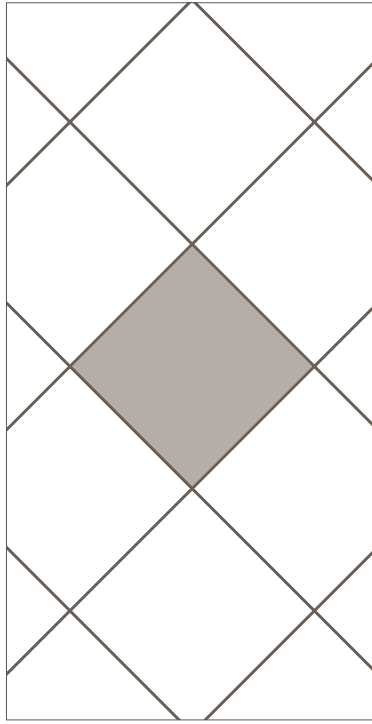


6 x 6 or 4 x 4

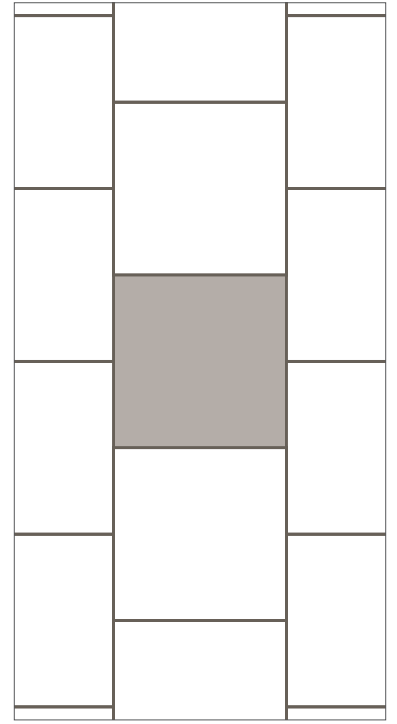


6 x 6

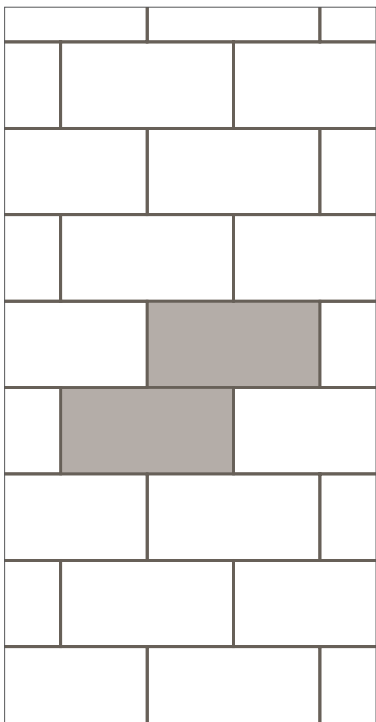

6 x 6

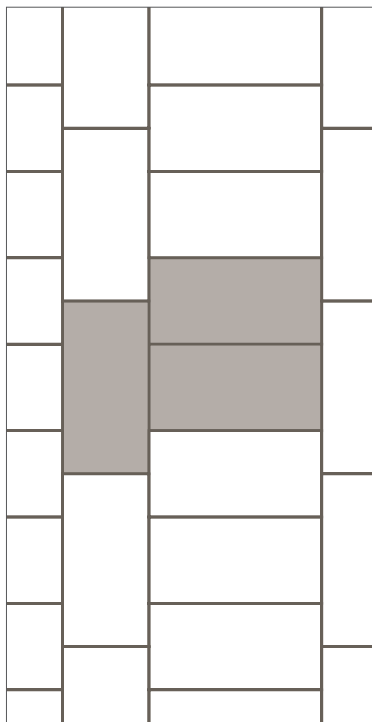

3 x 6

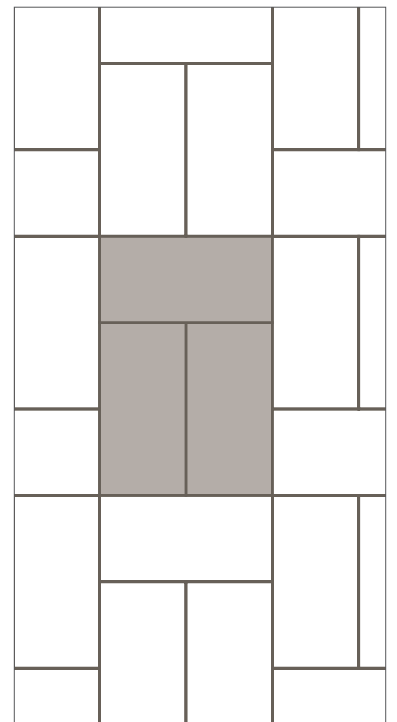





3 x 6

CLASSIC

COLOR WHEEL™ COLLECTION – GLAZED CERAMIC

SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	6 x 6 Wall Tile	(6" x 6") (15.31 cm x 15.31 cm)	5/16" 7.90 mm	12.50	50
	4 x 4 Wall Tile	(4-1/4" x 4-1/4") (10.90 cm x 10.90 cm)	5/16" 7.90 mm	12.50	100
	3 x 6 Wall Tile	(3" x 6") (7.65 cm x 15.31 cm)	5/16" 7.90 mm	12.50	100
	3 x 6 † Bevel Wall Tile	(3" x 6") (7.65 cm x 15.31 cm)	3/8" 9.40 mm	10.40	80

† Bevel is available in Group 1 colors only. Other colors available through the ColorMatch™ Special Order program.

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓*
Pool Linings	N/A	✓


A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications in non-freezing climates, when proper installation methods are followed.

* Matte finishes only. No Bevel Tile. Darker colors may show scratches.

INSTALLATION

Grout Joint Recommendation	Shade Variation
Wall: 1/16"	 Low (V1)

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 20.0%
Breaking Strength	C648	120-230 lbs
Scratch Hardness	MOHS	4.0-6.0
Chemical Resistance	C650	Resistant
Abrasion Resistance	C1027	N/A

For additional information on test results, visit us at: daltile.com/information/TestResults.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

LRV & MUNSELL

Color #	LRV	Munsell	Illuminate-OBS
SEMI-GLOSS			
0100	83.9	2.6Y 9.2/0.5	F02-02 (CWF)
0190	83.9	7.0Y 9.2/0.2	F02-02 (CWF)
K175	75.9	5.2Y 8.8/0.9	F02-02 (CWF)
0135	68.0	2.9Y 8.4/1.2	F02-02 (CWF)
0161	48.0	1.7Y 7.3/1.5	F02-02 (CWF)
0166	26.8	1.1Y 5.7/1.6	F02-02 (CWF)
0144	14.5	5.9YR 4.3/1.3	F02-02 (CWF)
0109	37.9	6.0Y 6.6/1.0	F02-02 (CWF)
X114	43.7	1.4GY 7.0/0.3	F02-02 (CWF)
0182	22.6	1.9B 5.3/0.1	F02-02 (CWF)
0180	11.4	1.3B 3.9/0.4	F02-02 (CWF)
K111	5.0	10.0B 2.6/0.1	F02-02 (CWF)
MATTE			
0790	83.4	4.9Y 9.2/0.2	F02-02 (CWF)
K775	75.9	5.2Y 8.8/0.9	F02-02 (CWF)
X735	70.9	3.5Y 8.6/1.2	F02-02 (CWF)
0761	48.1	2.5Y 7.3/1.5	F02-02 (CWF)
0766	26.8	0.2Y 5.7/1.7	F02-02 (CWF)
0744	13.9	7.6YR 4.3/1.3	F02-02 (CWF)
0709	36.9	5.6Y 6.5/1.0	F02-02 (CWF)
X714	43.9	3.6GY 7.0/0.4	F02-02 (CWF)
0782	22.3	9.8G 5.3/0.1	F02-02 (CWF)
0780	11.1	0.6B 3.9/0.4	F02-02 (CWF)
K711	5.8	3.3PB 2.8/0.1	F02-02 (CWF)
ACCENT			
K189	5.9	5.0PB 2.9/1.2	F02-02 (CWF)
1012	48.1	9.7YR 7.2/6.9	F02-02 (CWF)
1049	18.0	1.9B 5.0/4.5	F02-02 (CWF)
1097	26.4	10.1R 5.6/10.2	F02-02 (CWF)
0115	11.7	3.3G 4.1/4.9	F02-02 (CWF)
1174	9.1	5.8PB 3.6/5.6	F02-02 (CWF)
1178	6.8	5.9RP 3.1/2.0	F02-02 (CWF)
SH17	14.0	5.1R 4.4/11.1	F02-02 (CWF)
0141	24.7	3.0GY 5.5/2.1	F02-02 (CWF)
0148	48.3	3.7BG 7.4/1.3	F02-02 (CWF)
0160	73.3	3.3Y 8.7/3.3	F02-02 (CWF)
0169	40.4	9.7B 6.9/2.6	F02-02 (CWF)
1469	9.3	4.5PB 3.6/2.7	F02-02 (CWF)
DH50	70.6	4.7Y 8.4/8.8	F02-02 (CWF)
DM14	4.7	9.9PB 2.5/4.4	F02-02 (CWF)
1098	50.9	2.6GY 7.4/5.2	F02-02 (CWF)
1194	19.0	0.3PB 5.2/6.7	F02-02 (CWF)
1467	16.6	7.0P 4.6/2.2	F02-02 (CWF)

















 POST-CONSUMER
RECYCLED MATERIALS

 PRE-CONSUMER
RECYCLED MATERIALS







 MADE IN THE U.S.A.

All or select items within this series meet the requirements for these qualifications. For more information, visit daltile.com.

TRIM

TRIM	Thickness	Pieces/ Carton
 1/2 x 12 / S-1/212J Jolly (1/2" x 11-15/16") (1.29 cm x 30.36 cm)	1/4" 7.23 mm	12
 A-106 / 1 x 6 Quarter Round (1" x 6") (2.43 cm x 15.16 cm)	1/4" 6.30 mm	152
 AC-106 / 1 x 6 Quarter Round Corner (1" x 6") (2.43 cm x 15.16 cm)	1/4" 7.23 mm	120
SURFACE BULLNOSE		
 S-4269 / 2 x 6 Bullnose (2" x 6") (5.15 cm x 15.31 cm)	5/16" 7.90 mm	100
 SN-4269 / 2 x 2 Bullnose Corner (2" x 2") (5.15 cm x 5.15 cm)	5/16" 7.90 mm	25
 S-4669 / 6 x 6 Bullnose (6" x 6") (15.31 cm x 15.31 cm)	5/16" 7.90 mm	50
 SCRL-4669 / 6 x 6 Bullnose Corner (6" x 6") (15.31 cm x 15.31 cm)	5/16" 7.90 mm	50
 S-4449 / 4 x 4 Bullnose (4-1/4" x 4-1/4") (10.90 cm x 10.90 cm)	5/16" 7.90 mm	100
 SCRL-4449 / 4 x 4 Bullnose Corner (4-1/4" x 4-1/4") (10.90 cm x 10.90 cm)	5/16" 7.90 mm	100
 S-4369MOD / 3 x 6 Bullnose (on 6" side) (3" x 6") (7.65 cm x 15.31 cm)	5/16" 7.90 mm	100
 S-4639MOD / 3 x 6 Bullnose (on 3" side) (3" x 6") (7.65 cm x 15.31 cm)	5/16" 7.90 mm	100
 SCR-4369M / 3 x 6 Bullnose Corner Right (3" x 6") (7.65 cm x 15.31 cm)	5/16" 7.90 mm	100
 SCL-4369M / 3 x 6 Bullnose Corner Left (3" x 6") (7.65 cm x 15.31 cm)	5/16" 7.90 mm	100
RADIUS BULLNOSE		
 A-4200 / 2 x 6 Bullnose (2" x 6") (5.28 cm x 15.20 cm)	5/16" 7.90 mm	100
 AN-4200 / 2 x 2 Bullnose Corner (2" x 2") (5.28 cm x 5.28 cm)	5/16" 7.90 mm	20
FLAT TOP COVE BASE *		
 A-3601 / 6 x 6 Cove Base (6" x 6") (15.31 cm x 15.31 cm)	5/16" 7.90 mm	44
 SCR-3601 / 6 x 6 Cove Corner Right (6" x 6") (15.31 cm x 15.31 cm)	5/16" 7.90 mm	20
 SCL-3601 / 6 x 6 Cove Corner Left (6" x 6") (15.31 cm x 15.31 cm)	5/16" 7.90 mm	20
 A-3401 / 4 x 4 Cove Base (4-1/4" x 4-1/4") (10.90 cm x 10.90 cm)	5/16" 7.90 mm	84
 SCR-3401 / 4 x 4 Cove Corner Right (4-1/4" x 4-1/4") (10.90 cm x 10.90 cm)	5/16" 7.90 mm	30
 SCL-3401 / 4 x 4 Cove Corner Left (4-1/4" x 4-1/4") (10.90 cm x 10.90 cm)	5/16" 7.90 mm	30
 A-3361MOD / 3 x 6 Cove Base (3" x 6") (7.65 cm x 15.31 cm)	5/16" 7.90 mm	36
 SCR-3361M / 3 x 6 Cove Base Corner Right (3" x 6") (7.65 cm x 15.31 cm)	5/16" 7.90 mm	36
 SCL-3361M / 3 x 6 Cove Base Corner Left (3" x 6") (7.65 cm x 15.31 cm)	5/16" 7.90 mm	36
SANITARY COVE BASE *		
 S-3619T / 6 x 6 Cove Base (6" x 6") (15.31 cm x 15.31 cm)	5/16" 7.90 mm	40
 SCR-3619T / 6 x 6 Cove Base Corner Right (6" x 6") (15.31 cm x 15.31 cm)	5/16" 7.90 mm	20

TRIM (CON'T)

TRIM	Thickness	Pieces/ Carton
 SCL-3619T / 6 x 6 Cove Base Corner Left (6" x 6") (15.31 cm x 15.31 cm)	5/16" 7.90 mm	20
 S-3419T / 4 x 6 Cove Base (4-1/4" x 6") (10.90 cm x 15.31 cm)	5/16" 7.90 mm	60
 SCR-3419T / 4 x 6 Cove Base Corner Right (4-1/4" x 6") (10.90 cm x 15.29 cm)	5/16" 7.90 mm	20
 SCL-3419T / 4 x 6 Cove Base Corner Left (4-1/4" x 6") (10.90 cm x 15.31 cm)	5/16" 7.90 mm	20
SANITARY COVE BASE - Slim Foot Design *		
 S-3619TN / 6 x 6 Cove Base (6" x 6") (15.31 cm x 15.31 cm)	5/16" 7.90 mm	40
 SC-3619TN / 1 x 6 Cove Base Corner (1" x 6") (2.43 cm x 15.16 cm)	5/16" 7.90 mm	60

* Available in Group 1 & 2 Colors. Group 3 Colors are Made-to-Order.

* Available in Group 1 Colors. Group 2 & 3 Colors are Made-to-Order.

TRIM USAGE

Wall Tile	66	44	36MOD	36MODBEV
Jolly	S1/212J	S1/212J	S1/212J	S1/212J
Quarter Round	A106	A106	A106	A106
Quarter Round Corner	AC106	AC106	AC106	AC106
SURFACE BULLNOSE				
Bullnose	S4669	S4449	S4369MOD & S4639MOD	
Corner	SCRL4669	SCRL4449	SCR4369M & SCL4369M	
Bullnose	S4269	S4269	S4269	
Corner	SN4269	SN4269	SN4269	SN4269
RADIUS BULLNOSE				
Bullnose	A4200	A4200	A4200	
Corner	AN4200	AN4200	AN4200	
FLAT TOP COVE BASE				
Cove Base	A3601	A3401	A3361MOD	A3361MOD
Cove Base Corner	SCR3601 & SCL3601	SCR3401 & SCL3401	SCR3361M & SCL3361M	SCR3361M & SCL3361M
	Best Match			

WALL
CLASSIC
COLOR WHEEL™ COLLECTION – GLAZED CERAMIC


MOSAIC



SEMI-GLOSS



BLACK
K111 (2)



ARCTIC WHITE
O190 (1)



BISCUIT
K175 (1)



URBAN PUTTY
O161 (2)



ARCHITECTURAL
GRAY O109 (2)



DESERT GRAY
X114 (1)



SUEDE GRAY
O182 (2)




CHALKBOARD
O180 (2)

MATTE



MATTE BLACK
K711 (2)



MATTE ARCTIC WHITE
O790 (1)



MATTE BISCUIT
K775 (1)



MATTE URBAN PUTTY
O761 (2)



MATTE ARCHITECTURAL
GRAY O709 (2)



MATTE DESERT GRAY
X714 (1)



MATTE SUEDE GRAY
O782 (2)



MATTE CHALKBOARD
O780 (2)

ACCENT*



MUSTARD
1012 (3)



ORANGE BURST
1097 (3)



CURRANT
SH17 (3)



EMERALD
O115 (3)



SEA BREEZE
1174 (3)



OCEAN BLUE
1049 (3)



NAVY
K189 (3)




PLUM CRAZY
1178 (3)


*Accent available in Semi-Gloss finish only.

LINEAR


COLOR WHEEL™ COLLECTION – GLAZED CERAMIC

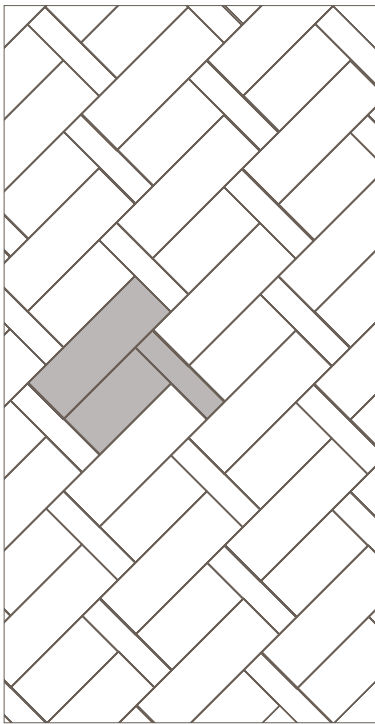


4 x 12 | 4 x 8 | 2 x 8

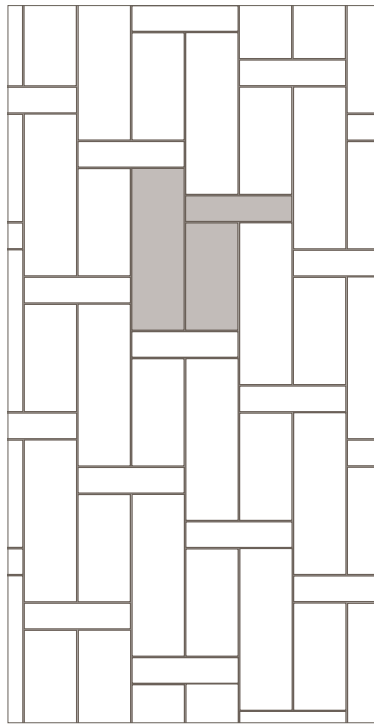


4 x 12 | 4 x 8 | 2 x 8

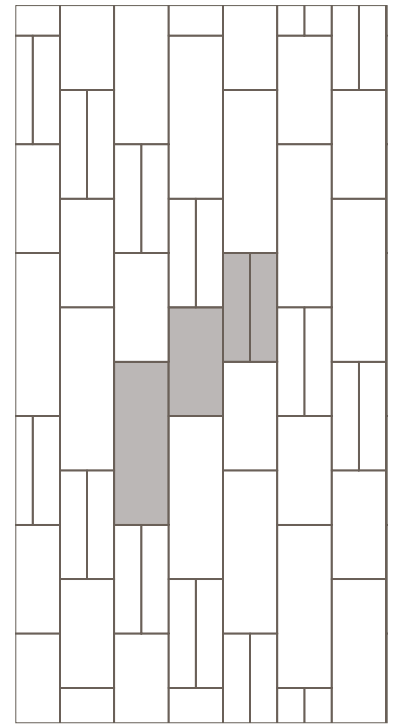


4 x 12 | 4 x 8 | 2 x 8

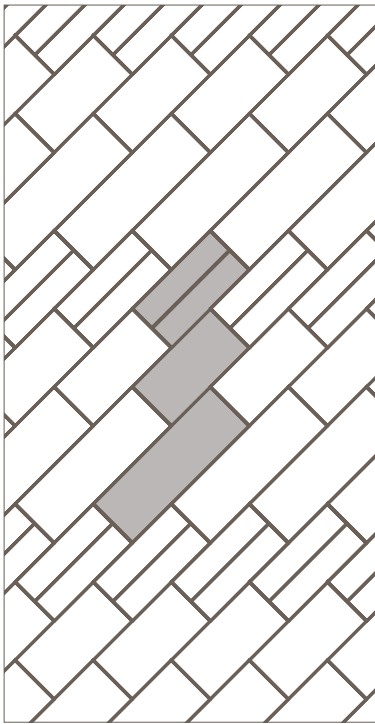


4 x 12 | 4 x 8 | 2 x 8

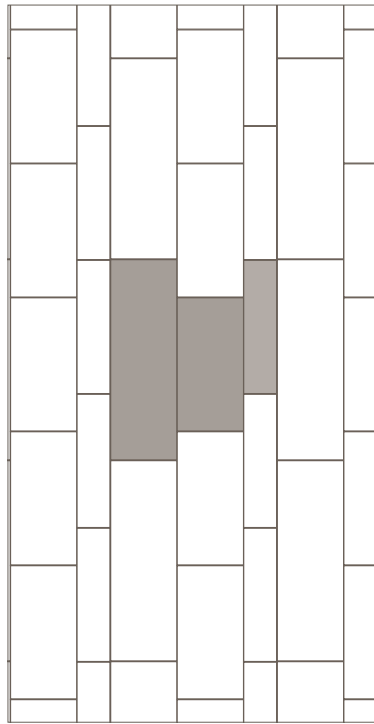


4 x 12 | 4 x 8 | 2 x 8

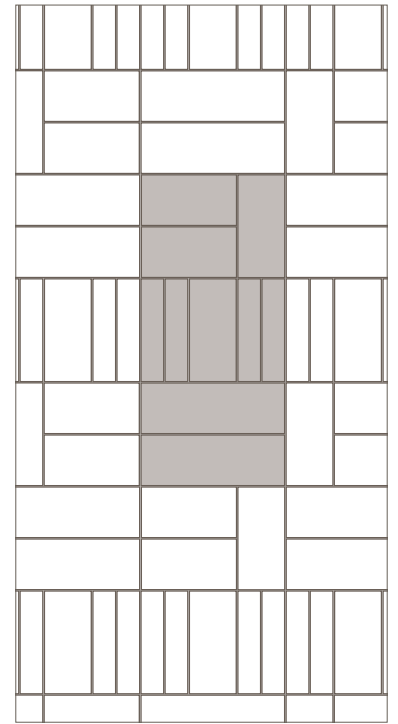


4 x 12 | 4 x 8 | 2 x 8

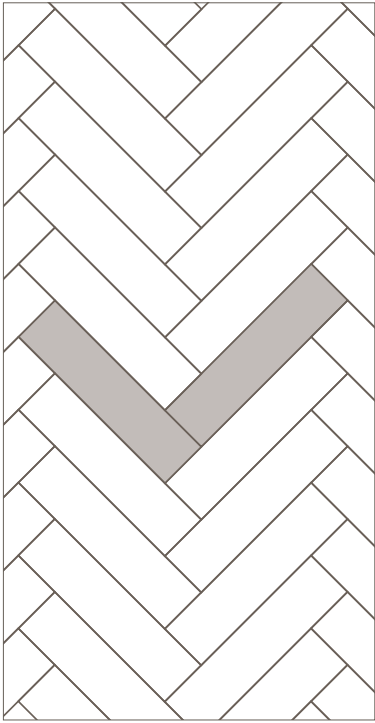


4 x 16

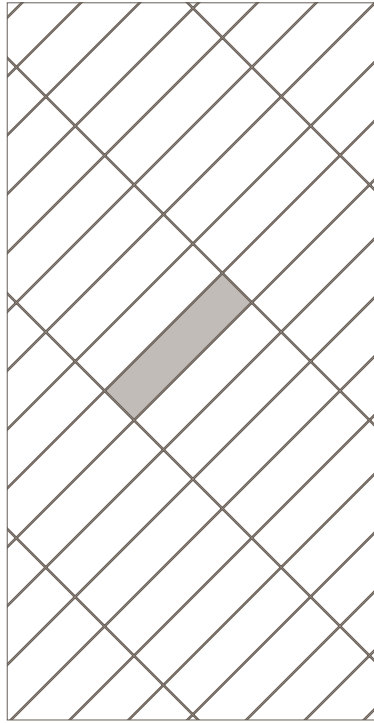


4 x 16

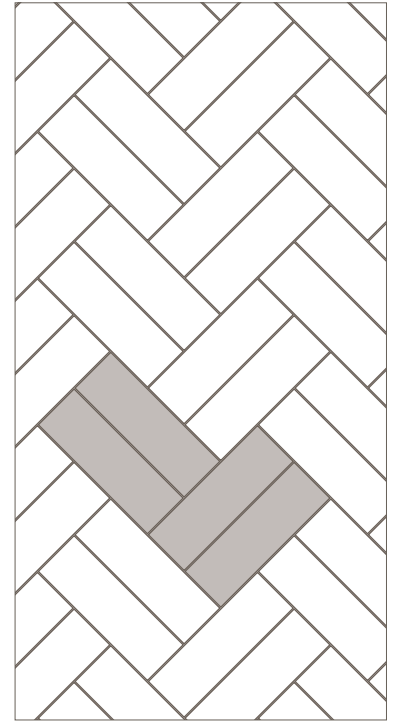


6 x 18

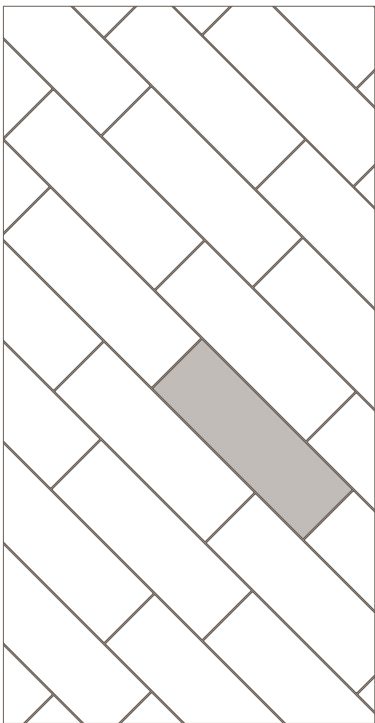

8 x 24

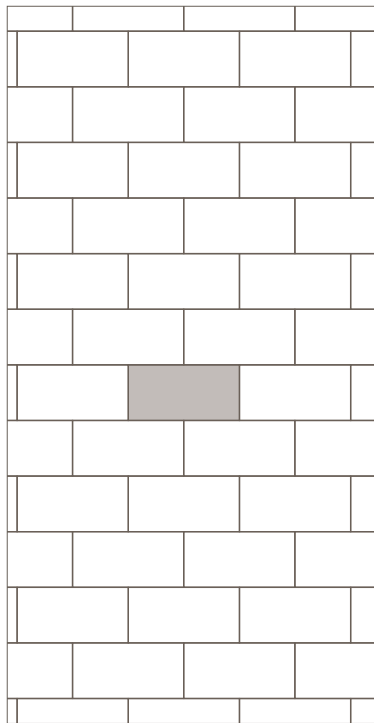


4 x 8

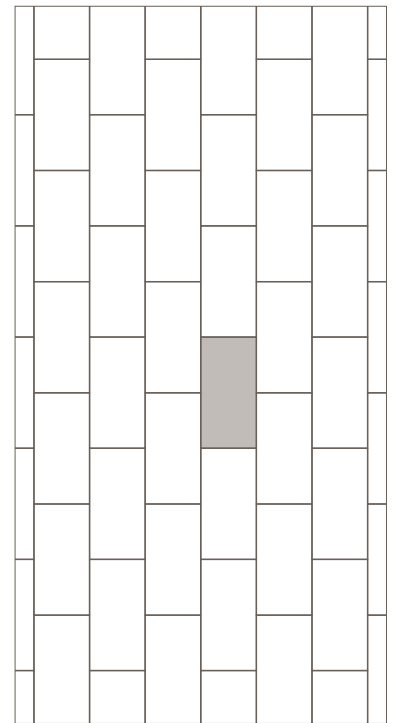


4 x 8

LINEAR


COLOR WHEEL™ COLLECTION – GLAZED CERAMIC

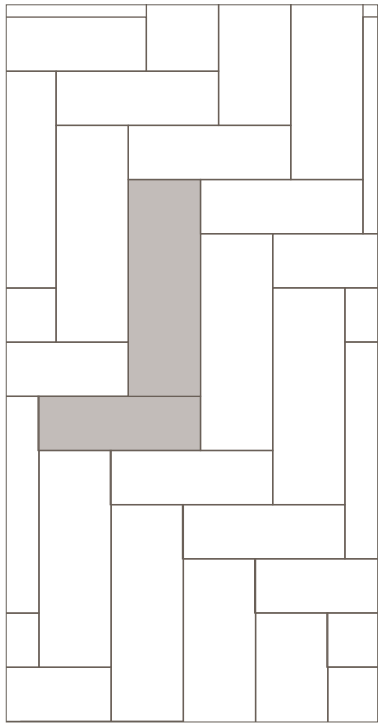


6 x 18 | 8 x 24

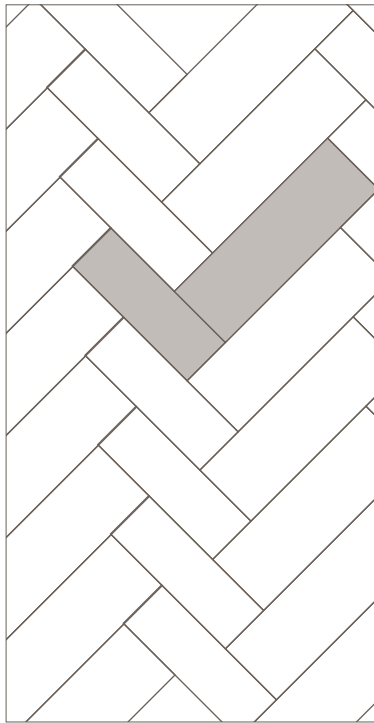


6 x 18 | 8 x 24

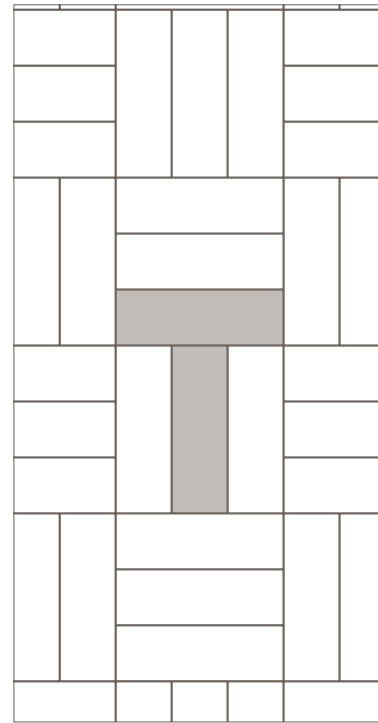


8 x 24

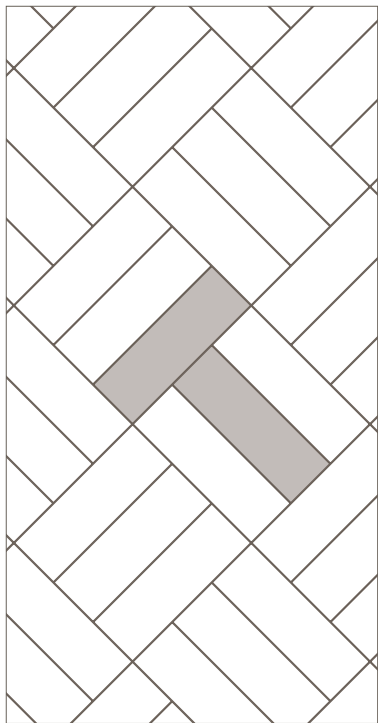


8 x 24

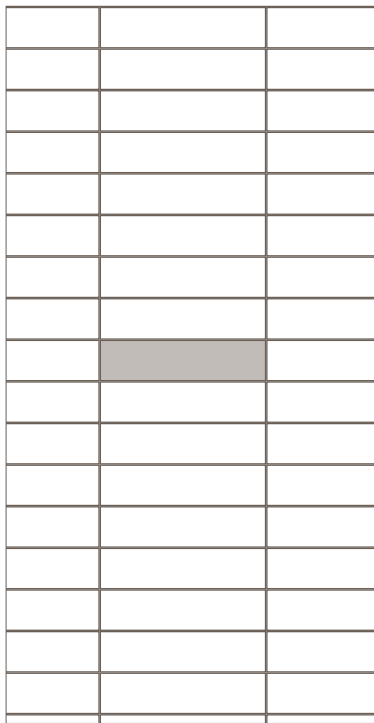


4 x 16

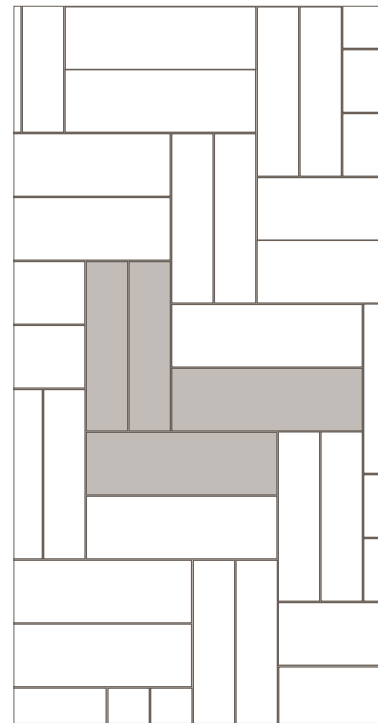


4 x 16 | 6 x 18

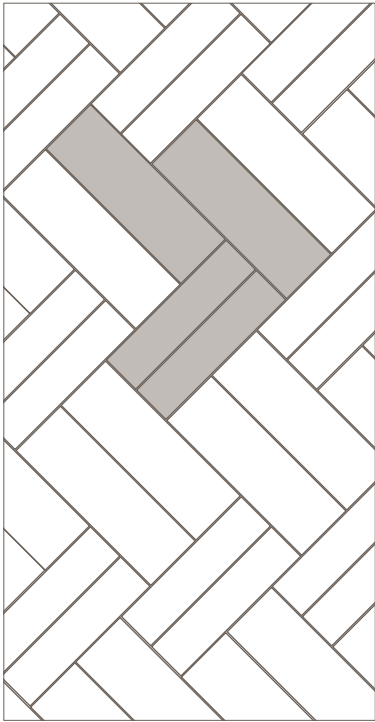


4 x 16 | 6 x 18

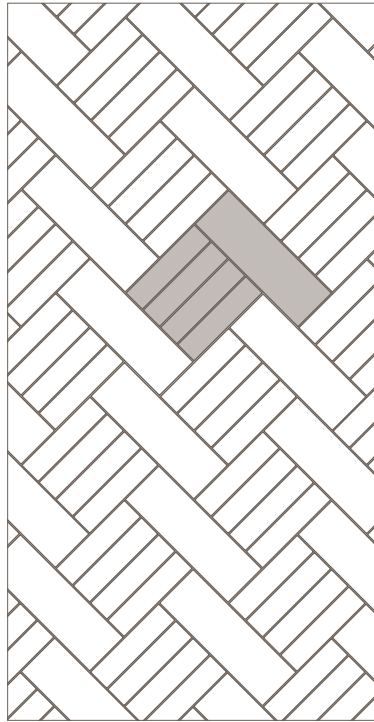


2 x 8 | 4 x 12

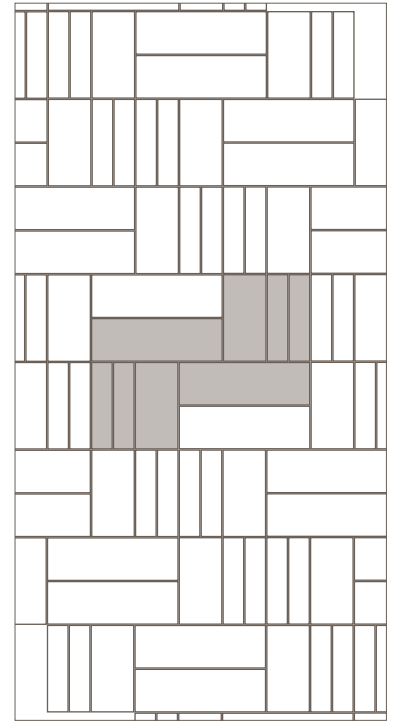


2 x 8 | 4 x 8 | 4 x 12

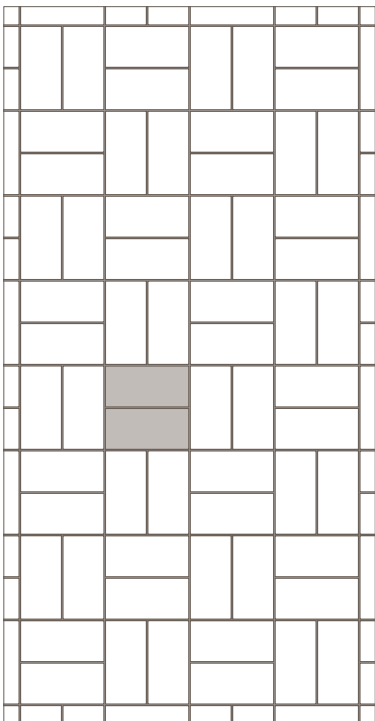

4 x 8

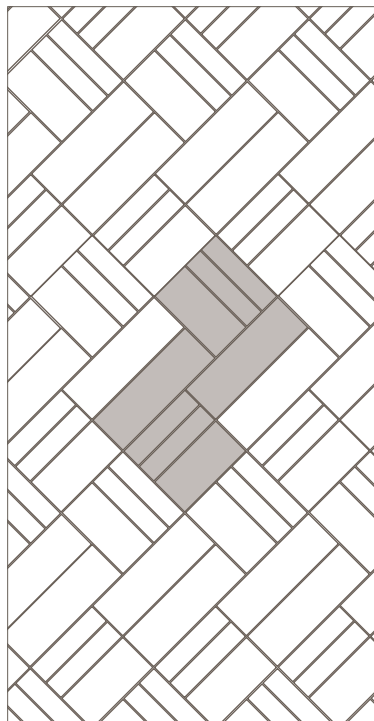



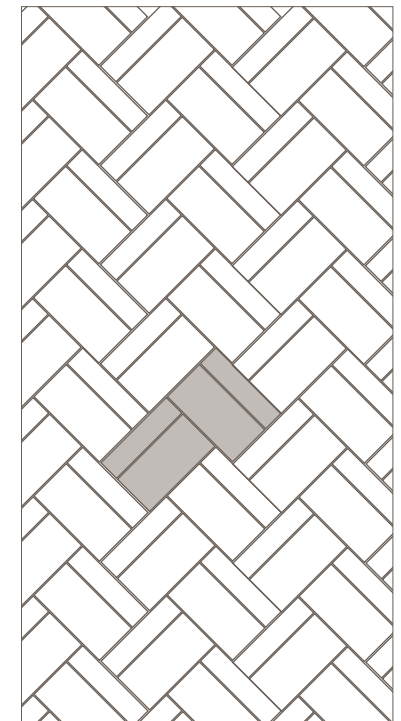



2 x 8 | 4 x 8 | 4 x 12



2 x 8 | 4 x 8

SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	8 x 24 Wall Tile	(8" x 24") (20.34 cm x 61.03 cm)	3/8" (9.3 mm)	13.30	10
	6 x 18 Wall Tile	(6" x 18") (15.25 cm x 45.76 cm)	3/8" (9.3 mm)	11.25	15
	4 x 16 Wall Tile	(4" x 16") (10.17 cm x 40.68 cm)	3/8" (9.3 mm)	13.20	30
	4 x 12 Wall Tile	(4-1/4" x 12-7/8") (10.91 cm x 32.77 cm)	5/16" (7.9 mm)	10.64	28
	4 x 8 Wall Tile	(4-1/4" x 8-9/16") (10.91 cm x 21.82 cm)	5/16" (7.9 mm)	10.63	42
	2 x 8 Wall Tile	(2-1/8" x 8-9/16") (5.45 cm x 21.82 cm)	5/16" (7.9 mm)	10.40	80

APPLICATIONS










	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.


APPLICATION NOTES:

Suitable for exterior applications in non-freezing climates, when proper installation methods are followed.

TRIM

	Type	Number	Size	Pieces/ Carton
	Jolly	S-1/212J	1/2 x 11-15/16	12
	Wall Bullnose	S-44D9	4 x 16	24
	Wall Bullnose Corner	SN-44D9	4 x 4	20
	Wall Bullnose	S-44C9MOD	4-1/4 x 12-7/8	28
	Wall Bullnose	S-4489MOD	4-1/4 x 8-9/16	42
	Wall Bullnose Corner	SCRL-4449	4-1/4 x 4-1/4	100
	Wall Bullnose	S-4289MOD	2-1/8 x 8-9/16	80
	Wall Bullnose Corner	SN-4289M	2-1/8 x 2-1/8	25
	Flat Top Cove Base	A34C1MOD	4-1/4 x 12-7/8	40

INSTALLATION

Grout Joint Recommendation	Shade Variation
6 x 18 & 8 x 24: 1/16" (1/8" when rectangular size is installed in a staggered brick-joint pattern; overlap should not exceed 33%.)	 Low (V1)
2 x 8, 4 x 12, & 4 x 16: 1/16" (When rectangular size is installed in a staggered brick joint pattern, overlap should not exceed 33%.)	
4 x 8: 1/16"	

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 20.0%
Breaking Strength	C648	120-230 lbs
Scratch Hardness	MOHS	4.0-6.0
Chemical Resistance	C650	Resistant
Abrasion Resistance	C1027	N/A

For additional information on test results, visit us at: daltile.com/information/TestResults.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.