

CORE FUNDAMENTALS™

CHOICE | ADVANTAGE | PRIME





CORE FUNDAMENTALS™



CHOICE



ADVANTAGE



PRIME

STONE
LOOK

USAGE



FLOOR



WALL



COUNTERTOP



SHOWER
FLOOR



EXTERIOR
FLOOR



STEPWISE™



TRU-EDGE™



MADE IN
THE U.S.A.



LARGE
FORMAT



MOSAIC/
DECO



ENCAUSTIC



TERRAZZO



PAVER



CUSTOMIZE



FLEXFIT™



CG
GLAZED
CONCRETE

LOW HIGH

SPECIAL FEATURES

CORE FUNDAMENTALS™ CHOICE

THE **CHOICE TIER** HIGHLIGHTS THE BASICS WITH A VARIETY OF FLOOR TILE WITH A COMPLEMENTARY MOSAIC EXCELLENT FOR EVERYDAY USE.

NOT APPLICABLE
FOR ALL PRODUCTS
IN THIS SERIES. SEE CHARTS
FOR FULL PRODUCT DETAILS.

CORE FUNDAMENTALS™ – CHOICE

GLAZED CERAMIC FLOOR & MOSAICS

FINISHES: MATTE

FLOOR TILE



IVORY AR04



CASPER AR05



FAWN AR02

AVAILABLE TILE SIZES



15 x 15
Floor Tile



12 x 24
Floor Tile



12 x 12
Floor Tile

FLOOR TILE



FAIR CS22



BUFF CS20



UMBER CS21



IRON CS23

AVAILABLE TILE SIZES



18 x 18
Floor Tile



12 x 24
Floor Tile



12 x 12
Floor Tile



2 x 2
Mosaic

2 x 2 MOSAIC – DOT-MOUNTED ON A 12 x 24 SHEET



FAIR CS22



BUFF CS20



UMBER CS21



IRON CS23

FLOOR TILE



EVEREST WHITE CG05



TWILIGHT GREY CG07

AVAILABLE TILE SIZES



18 x 18
Floor Tile



12 x 24
Floor Tile



12 x 12
Floor Tile



2 x 2
Mosaic







FOR COMPLETE PRODUCT INFORMATION, PLEASE VISIT WWW.DAL TILE/CORE-FUNDAMENTALS

CORE FUNDAMENTALS™ – CHOICE

AVAILABLE SIZE & TRIM SHAPES

CHOICE

PLEASE REFER TO CHART ON NEXT PAGE FOR AVAILABILITY BASED ON COLOR CODE

FLOOR			THICKNESS	FLOOR TRIM		
	18 x 18 Floor Tile	(17-11/16" x 17-11/16") (45.01 cm x 45.01 cm)	5/16"		P43C9	3 x 12 Floor Bullnose
	15 x 15 Floor Tile	(14-5/8" x 14-5/8") (37.16 cm x 37.16 cm)	5/16"			
	12 x 24 Floor Tile	(11-13/16" x 23-11/16") (30.02 cm x 60.12 cm)	5/16"			
	12 x 12 Floor Tile	(11-13/16" x 11-13/16") (30.02 cm x 30.02 cm)	5/16"			
MOSAICS			THICKNESS			
	2 x 2 Mosaic Dot-mounted	(12" x 24" Sheet) (30.48 cm x 60.96 cm Sheet)	1/4"			

CORE FUNDAMENTALS™ – CHOICE

AVAILABLE SIZE & TRIM SHAPES

			FLOOR					
			FIELD TILE				BULLNOSE	MOSAIC
COLOR #	COLOR NAME	PAGE #	18 x 18	15 x 15	12 x 24	12 x 12	P43C9	2 x 2
AR02	Fawn	5		●	●	●	●	
AR04	Ivory	5		●	●	●	●	
AR05	Casper	5		●	●	●	●	
CG05	Everest White	5	●		●	●	●	●
CG07	Twilight Grey	5	●		●	●	●	●
CS20	Buff	5	●		●	●	●	●
CS21	Umber	5	●		●	●	●	●
CS22	Fair	5	●		●	●	●	●
CS23	Iron	5	●		●	●	●	●

CORE FUNDAMENTALS™ – CHOICE


APPLICATION SPECIFICATIONS

CHOICE – AR02 | AR04 | AR05

APPLICATIONS	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltille.com/DCOF.

APPLICATION NOTES:
Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

INSTALLATION	
Grout Joint Recommendation	Shade Variation
Floor: 3/16" (Overlap should not exceed 33% when installing tile with a length 15" or greater in a staggered brick-joint pattern.)	 High (V3)

PERFORMANCE CHARACTERISTICS	ASTM#	Result
Water Absorption	C373	< 7.0%
Breaking Strength	C648	> 250 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: daltille.com/information/TestResults.



DURABILITY
Floor Surface Wear Resistance
1 Residential Bathrooms ③ All Residential / Light Commercial
2 All Residential Areas 4 All Residential / Commercial

CHOICE – CS20 | CS21 | CS22 | CS23 | CG05 | CG07

APPLICATIONS	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓*
Shower Floors (Residential or Light Commercial)	≥ 0.42	✓*
Shower Floor – Linear drain	≥ 0.42	✓*
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	✓*

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltille.com/DCOF.

APPLICATION NOTES:
Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.
* Mosaic tile only

INSTALLATION	
Grout Joint Recommendation	Shade Variation
Floor: 3/16" (Overlap should not exceed 33% when installing tile with a length 15" or greater in a staggered brick-joint pattern.)	 Medium (V2) CS20, CS21, CS22, CS23
Mosaic: 1/8"	 High (V3) CG05, CG07

PERFORMANCE CHARACTERISTICS	ASTM#	Floor Result	Mosaic Result
Water Absorption	C373	< 7.0%	< 3.0%
Breaking Strength	C648	> 250 lbs	> 250 lbs
Scratch Hardness	MOHS	7.0	7.0
Chemical Resistance	C650	Resistant	Resistant

For additional information on test results, visit us at: daltille.com/information/TestResults.

DURABILITY
Floor Surface Wear Resistance
1 Residential Bathrooms ③ All Residential / Light Commercial
2 All Residential Areas 4 All Residential / Commercial



Photo features Core Fundamentals Choice buff 2 x 2 mosaic on shower floor.

STONE LOOK

USAGE



FLOOR



WALL



COUNTERTOP



SHOWER
FLOOR



EXTERIOR
FLOOR



STEPWISE™



TRU-EDGE™



MADE IN
THE U.S.A.



LARGE
FORMAT



MOSAIC/
DECO



ENCAUSTIC



TERRAZZO



PAVER



CUSTOMIZE



FLEXFIT™



C.G.
GLAZED
CONCRETE



LOW HIGH

SPECIAL FEATURES

CORE FUNDAMENTALS™

ADVANTAGE

THE **ADVANTAGE TIER** IS RICH WITH A COMBINATION OF DIFFERENT FLOOR, WALL, AND MOSAICS TO EXCITE DESIGN TO MIX AND MATCH OR CREATE A COHESIVE LOOK.

NOT APPLICABLE
FOR ALL PRODUCTS
IN THIS SERIES. SEE CHARTS
FOR FULL PRODUCT DETAILS.

CORE FUNDAMENTALS™ – ADVANTAGE


GLAZED CERAMIC FLOOR, WALL & MOSAICS

FINISHES: MATTE



Photo features Mural Taupe AQ02 12 x 24 on the floor.

FLOOR TILE

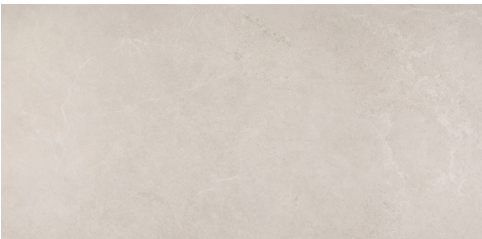

PORTRAIT WHITE AQ01



MURAL TAUPE AQ02



RENOIR GREY AQ03

WALL TILE



PORTRAIT WHITE AQ01



MURAL TAUPE AQ02



RENOIR GREY AQ03

2 x 4 BRICK-JOINT MOSAIC – DOT-MOUNTED ON A 12 x 12 SHEET



PORTRAIT WHITE AQ01



MURAL TAUPE AQ02



RENOIR GREY AQ03

AVAILABLE TILE SIZES



FOR COMPLETE PRODUCT INFORMATION, PLEASE VISIT WWW.DAL TILE/CORE-FUNDAMENTALS

CORE FUNDAMENTALS™ – ADVANTAGE

FINISHES: MATTE

GLAZED CERAMIC FLOOR, WALL & MOSAICS

FLOOR TILE



ARIA WHITE EP20



PERCUSSION TAUPE EP21



TRUMPET GREY EP22

2 x 4 HERRINGBONE MOSAIC – DOT-MOUNTED ON 14 x 12 SHEET



ARIA WHITE EP20



PERCUSSION TAUPE EP21



TRUMPET GREY EP22

AVAILABLE TILE SIZES



18 x 18
Floor Tile



12 x 24
Floor Tile



12 x 12
Floor Tile



2 x 4
Herringbone Mosaic

FLOOR TILE



OFF WHITE AR30



LIGHT BEIGE AR31



LIGHT GRAY AR32

2 x 2 MOSAIC – DOT-MOUNTED ON A 12 x 12 SHEET



OFF WHITE AR30



LIGHT BEIGE AR31



LIGHT GRAY AR32

AVAILABLE TILE SIZES



18 x 18
Floor Tile



12 x 24
Floor Tile



12 x 12
Floor Tile



2 x 2
Mosaic

FOR COMPLETE PRODUCT INFORMATION, PLEASE VISIT WWW.DAL TILE/CORE-FUNDAMENTALS

CORE FUNDAMENTALS™ – ADVANTAGE

GLAZED CERAMIC FLOOR, WALL & MOSAICS

FINISHES: MATTE

FLOOR TILE



WHITE BL43



GREY BL45

AVAILABLE TILE SIZES



15 x 15
Floor Tile



12 x 12
Floor Tile














Photo features Core Fundamentals Advantage Percussion Taupe 12 x 24 on the floor and wall.

CORE FUNDAMENTALS™ – ADVANTAGE

AVAILABLE SIZE & TRIM SHAPES

ADVANTAGE

PLEASE REFER TO CHART ON NEXT PAGE FOR AVAILABILITY BASED ON COLOR CODE

FLOOR			THICKNESS	FLOOR TRIM		
	18 x 18 Floor Tile	(17-11/16" x 17-11/16") (45.01 cm x 45.01 cm)	5/16"		P43C9	3 x 12 Floor Bullnose
	15 x 15 Floor Tile	(14-5/8" x 14-5/8") (37.16 cm x 37.16 cm)	5/16"	WALL TRIM		
	12 x 24 Floor Tile	(11-13/16" x 23-11/16") (30.02 cm x 60.12 cm)	5/16"		S4310	3 x 10 Wall Bullnose
	12 x 12 Floor Tile	(11-13/16" x 11-13/16") (30.02 cm x 30.02 cm)	5/16"		SN4310	3 x 3 Wall Bullnose Corner
WALL			THICKNESS			
	10 x 14 Wall Tile	(9-13/16" x 13-15/16") (24.99 cm x 35.40 cm)	5/16"			
MOSAICS			THICKNESS			
	2 x 4 Brick-joint Mosaic Dot-mounted	(12" x 12" Sheet) (30.48 cm x 30.48 cm Sheet)	1/4"			
	2 x 4 Herringbone Mosaic Dot-mounted	(14" x 12" Sheet) (35.56 cm x 30.48 cm Sheet)	1/4"			
	2 x 2 Mosaic Dot-mounted	(12" x 24" Sheet) (30.48 cm x 60.96 cm Sheet)	1/4"			

CORE FUNDAMENTALS™ – ADVANTAGE

AVAILABLE SIZE & TRIM SHAPES

ADVANTAGE

			FLOOR					WALL		MOSAIC		
			FIELD TILE				BULLNOSE	FIELD TILE	BULLNOSE			
COLOR #	COLOR NAME	PAGE #	18 x 18	15 x 15	12 x 24	12 x 12	P43C9	10 x 14	S4310 SN4310	2 x 4 BRICK-JOINT	2 x 4 HERRINGBONE	2 x 2
AQ01	Portrait White	11	●		●	●	●	●	●	●		
AQ02	Mural Taupe	11	●		●	●	●	●	●	●		
AQ03	Renoir Grey	11	●		●	●	●	●	●	●		
AR30	Off White	12	●		●	●	●					●
AR31	Light Beige	12	●		●	●	●					●
AR32	Light Gray	12	●		●	●	●					●
BL43	White	13		●		●	●					
BL45	Grey	13		●		●	●					
EP20	Aria White	12	●		●	●	●				●	
EP21	Percussion Taupe	12	●		●	●	●				●	
EP22	Trumpet Grey	12	●		●	●	●				●	

CORE FUNDAMENTALS™ – ADVANTAGE

APPLICATION SPECIFICATIONS

ADVANTAGE – AR30 | AR31 | AR32 | AQ01 | AQ02 | AQ03 | EP20 | EP21 | EP22

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓
Shower Floors (Residential or Light Commercial)	≥ 0.42	✓*
Shower Floor – Linear drain	≥ 0.42	✓*
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	✓*



A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed. Wall tile suitable for walls/backsplashes only.

* Mosaic tile only

INSTALLATION

Grout Joint Recommendation	Shade Variation
Floor: 3/16" (Overlap should not exceed 33% when installing tile with a length 15" or greater in a staggered brick-joint pattern.)	 Medium (V2) AR30 AR31 AR32
Mosaic: 1/8"	 High (V3) AQ01 AQ02 AQ03 EP20 EP21 EP22
Wall: 1/16"	

PERFORMANCE CHARACTERISTICS

	ASTM#	Floor Result	Wall Result	Mosaic Result
Water Absorption	C373	< 7.0%	< 20.0%	< 3.0%
Breaking Strength	C648	> 250 lbs	120-230 lbs	> 250 lbs
Scratch Hardness	MOHS	7.0	4.0-6.0	8.0
Chemical Resistance	C650	Resistant	Resistant	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

1	Residential Bathrooms (3)	All Residential / Light Commercial
2	All Residential Areas	4 All Residential / Commercial

ADVANTAGE – BL43 | BL45

APPLICATIONS


	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

INSTALLATION

Grout Joint Recommendation	Shade Variation
Floor: 3/16" (Overlap should not exceed 33% when installing tile with a length 15" or greater in a staggered brick-joint pattern.)	 Medium (V2)

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 7.0%
Breaking Strength	C648	> 250 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

1	Residential Bathrooms (3)	All Residential / Light Commercial
2	All Residential Areas	4 All Residential / Commercial



Photo features Aria White EP20 12 x 24 on the floor.

STONE LOOK

USAGE



FLOOR



WALL



COUNTERTOP



SHOWER
FLOOR



EXTERIOR
FLOOR



STEPWISE™



TRU-EDGE™



MADE IN
THE U.S.A.



LARGE
FORMAT



MOSAIC/
DECO



ENCAUSTIC



TERRAZZO



PAVER



CUSTOMIZE



FLEXFIT™



C.G.
SLIP-
CHUNK



LOW HIGH

SPECIAL FEATURES

CORE FUNDAMENTALS™ PRIME

THE **PRIME TIER** PROVIDES ALL THE ESSENTIAL BENEFITS OF TILE WHILE OFFERING AN ARRAY OF DIFFERENT LOOKS AND DECORATIVE ACCENTS TO HEIGHTEN DESIGN.

NOT APPLICABLE
FOR ALL PRODUCTS
IN THIS SERIES. SEE CHARTS
FOR FULL PRODUCT DETAILS.

CORE FUNDAMENTALS™ – PRIME


GLAZED CERAMIC FLOOR, WALL & MOSAICS

FINISHES: MATTE

FLOOR TILE



WHITE BA30

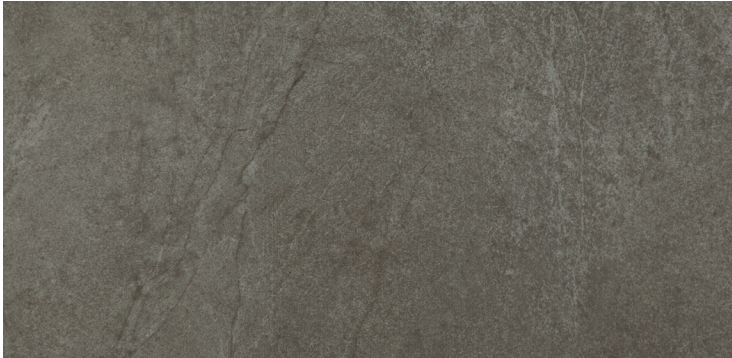


CHARCOAL BA34

10 x 14 WALL TILE



WHITE BA30

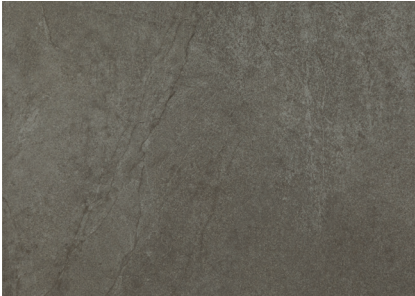

CHARCOAL BA34

2 x 4 MOSAIC – DOT-MOUNTED ON A 12 x 12 SHEET





WHITE BA30





CHARCOAL BA34


AVAILABLE TILE SIZES

- 

18 x 18
Floor Tile
- 


12 x 24
Floor Tile
- 

12 x 12
Floor Tile
- 

10 x 14
Wall Tile
- 

2 x 4
Straight-joint Mosaic

FLOOR TILE



RAINIER 1500



BLACK 2011

AVAILABLE TILE SIZES

- 

12 x 12
Floor Tile

CORE FUNDAMENTALS™ – PRIME


GLAZED CERAMIC FLOOR, WALL & MOSAICS

FINISHES: MATTE



Photo features Grey EL32 12 x 24 on the floor.

FLOOR TILE

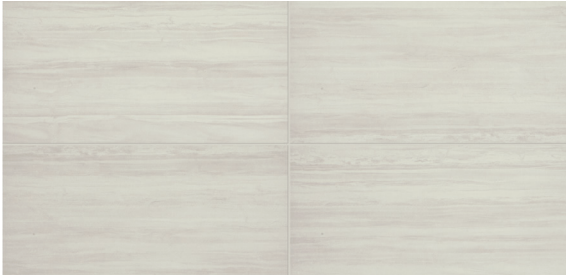

WHITE EL30



BEIGE EL31



GREY EL32

1 x 3 HERRINGBONE MOSAIC – DOT-MOUNTED ON A 9 x 12 SHEET



WHITE EL30



BEIGE EL31



GREY EL32

WALL TILE



WHITE EL30



BEIGE EL31



GREY EL32

AVAILABLE TILE SIZES



12 x 24
Floor Tile



4 x 12
Wall Tile



1 x 3
Herringbone Mosaic

FOR COMPLETE PRODUCT INFORMATION, PLEASE VISIT WWW.DAL TILE/CORE-FUNDAMENTALS

CORE FUNDAMENTALS™ – PRIME


GLAZED CERAMIC FLOOR, WALL & MOSAICS

FINISHES: MATTE | GLOSSY




Photo features Memoir Star Grey ME23 12x12 on the fireplace walls with Core Fundamentals Prime Grey KC04 12x24 on the floor.

FLOOR TILE

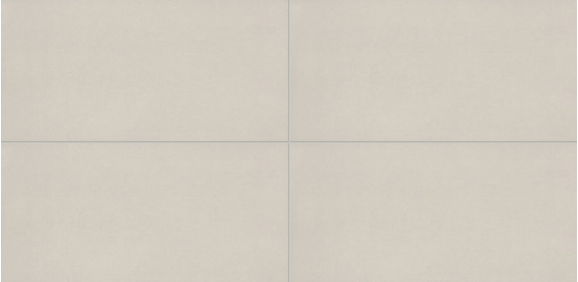

WHITE KC01

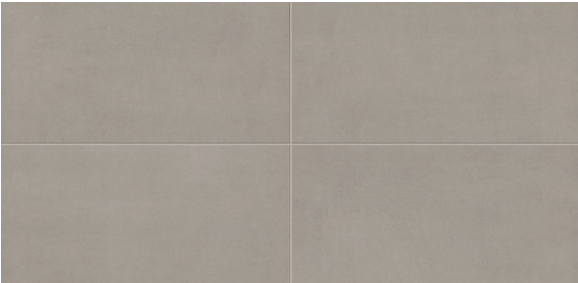


GREY KC04

2 x 2 MOSAIC – DOT-MOUNTED ON A 12 x 24 SHEET





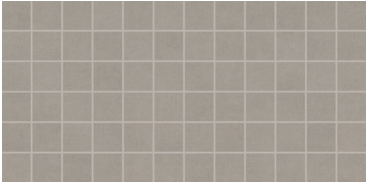


WHITE KC01



GREY KC04

AVAILABLE TILE SIZES

				
18 x 18 Floor Tile	12 x 24 Floor Tile	12 x 12 Floor Tile	4 x 12 Wall Tile	2 x 2 Mosaic

FOR COMPLETE PRODUCT INFORMATION,
PLEASE VISIT WWW.DAL TILE/CORE-FUNDAMENTALS

CORE FUNDAMENTALS™ – PRIME

GLAZED CERAMIC FLOOR, WALL & MOSAICS

FINISHES: MATTE | GLOSSY



Photo features Core Fundamentals Prime Vitality White 12 x 24 on the floor and Hexagon Mosaic on the shower floor

FLOOR TILE



VITALITY WHITE RL20




DYNAMIC BEIGE RL21




STAMINA GREY RL23

4 x 16 WALL TILE – FLAT



VITALITY WHITE RL20



DYNAMIC BEIGE RL21



STAMINA GREY RL23

4 x 16 WALL TILE – WAVE



VITALITY WHITE RL20




DYNAMIC BEIGE RL21




STAMINA GREY RL23


1.5" HEX MOSAIC – DOT-MOUNTED ON A 12 x 10 SHEET



VITALITY WHITE RL20




DYNAMIC BEIGE RL21



STAMINA GREY RL23

AVAILABLE TILE SIZES















FOR COMPLETE PRODUCT INFORMATION,
PLEASE VISIT WWW.DAL TILE/CORE-FUNDAMENTALS






CORE FUNDAMENTALS™ – PRIME

AVAILABLE SIZE & TRIM SHAPES

PRIME

PLEASE REFER TO CHART ON NEXT PAGE FOR AVAILABILITY BASED ON COLOR CODE

FLOOR	SIZES	THICKNESS
	18 x 36 Floor Tile (17-7/8" x 35-3/4") (45.40 cm x 90.80 cm)	5/16"
	18 x 18 Floor Tile (17-11/16" x 17-11/16") (45.01 cm x 45.01 cm)	5/16"
	12 x 24 Floor Tile (11-13/16" x 23-11/16") (30.02 cm x 60.12 cm)	5/16"
	12 x 12 Floor Tile (11-13/16" x 11-13/16") (30.02 cm x 30.02 cm)	5/16"
WALL	SIZES	THICKNESS
	10 x 14 Wall Tile (9-13/16" x 13-15/16") (24.99 cm x 35.40 cm)	3/8"
	4 x 16 Wall Tile (4" x 16") (10.17 cm x 40.68 cm)	5/16"
	4 x 16 Wave Wall Tile (4" x 16") (10.17 cm x 40.68 cm)	3/8"
	4 x 12 Wall Tile (4-1/4" x 12-7/8") (10.88 cm x 32.76 cm)	5/16"
MOSAICS	SIZES	THICKNESS
	2 x 4 Straight-joint Mosaic Dot-mounted (14" x 12" Sheet) (35.56 cm x 30.48 cm Sheet)	1/4"
	2 x 2 Mosaic Dot-mounted (12" x 24" Sheet) (30.48 cm x 60.96 cm Sheet)	1/4"
	1.5" Hex Mosaic Dot-mounted (12" x 12" Sheet) (30.48 cm x 30.48 cm Sheet)	1/4"
	1 x 3 Herringbone Mosaic Dot-mounted (12" x 12" Sheet) (30.48 cm x 30.48 cm Sheet)	1/4"

FLOOR TRIM		
	P43F9	3 x 24 Floor Bullnose
	P43C9	3 x 12 Floor Bullnose
WALL TRIM		
	S1/212J	12" Jolly
	S4310	3 x 10 Wall Bullnose
	SN4310	3 x 3 Wall Bullnose Corner

CORE FUNDAMENTALS™ – PRIME

AVAILABLE SIZE & TRIM SHAPES

PRIME

			FLOOR						WALL							MOSAIC			
COLOR #	COLOR NAME	PAGE #	FIELD TILE				BULLNOSE		FIELD TILE				BULLNOSE		QUARTER ROUND				
			18 x 36	18 x 18	12 x 24	12 x 12	P43F9	P43C9	10 x 14	4 x 16	4 x 16 Wave	4 x 12	S4310 SN4310	S1/212J	A106 UC106	2 x 4 STRAIGHT-JOINT	2 x 2	1.5 HEXAGON	1 x 3 HERRINGBONE
1500	Rainier	19				●		●											
2011	Black	19				●		●											
BA30	White	19		●	●	●		●	●				●			●			
BA34	Charcoal	19		●	●	●		●	●				●			●			
EL30	White	20			●		●					●		●					●
EL31	Beige	20			●		●					●		●					●
EL32	Grey	20			●		●					●		●					●
KC01	White	21		●	●	●		●									●		
KC04	Grey	21		●	●	●		●									●		
RL20	Vitality White	22	●		●	●	●		●	●	●			●				●	
RL21	Dynamic Beige	22	●		●	●	●		●	●	●			●				●	
RL23	Stamina Grey	22	●		●	●	●		●	●	●			●				●	



Photo features Core Fundamentals Prime Grey 12 x 24 on the floor with Memoir Cosmo Grey on the fireplace

CORE FUNDAMENTALS™ – PRIME

APPLICATION SPECIFICATIONS

PRIME – BA30 | BA34 | KC01 | KC04

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓*
Wet & Level – Interior Floor	≥ 0.42	✓*
Shower Floors (Residential or Light Commercial)	≥ 0.42	✓**
Shower Floor – Linear drain	≥ 0.42	✓**
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓*
Pool Linings	N/A	✓**

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

* Wall tile not suitable for this application

** Mosaic tile only

INSTALLATION

Grout Joint Recommendation	Shade Variation
----------------------------	-----------------

Floor: 3/16" (Overlap should not exceed 33% when installing tile with a length 15" or greater in a staggered brick-joint pattern.)

Wall: 1/16"

Mosaic: 1/8"



PERFORMANCE CHARACTERISTICS

	ASTM#	Floor Result	Wall Result	Mosaic Result
Water Absorption	C373	< 7.0%	< 20.0%	< 3.0%
Breaking Strength	C648	> 250 lbs	120-230 lbs	> 250 lbs
Scratch Hardness	MOHS	7.0	4.0-6.0	7.0
Chemical Resistance	C650	Resistant	Resistant	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

1	Residential Bathrooms ③	All Residential / Light Commercial
2	All Residential Areas 4	All Residential / Commercial

PRIME – EL30 | EL31 | EL32

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓*
Wet & Level – Interior Floor	≥ 0.42	✓*
Shower Floors (Residential or Light Commercial)	≥ 0.42	✓**
Shower Floor – Linear drain	≥ 0.42	✓**
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓*
Pool Linings	N/A	✓**

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

* Wall tile not suitable for this application

** Mosaic tile only

INSTALLATION

Grout Joint Recommendation	Shade Variation
----------------------------	-----------------

Floor: 3/16" (Overlap should not exceed 33% when installing tile with a length 15" or greater in a staggered brick-joint pattern.)

Wall: 1/16" (When rectangular size is installed in a staggered brick-joint pattern, overlap should not exceed 33%)

Mosaic: 1/8"



PERFORMANCE CHARACTERISTICS

	ASTM#	Floor Result	Wall Result	Mosaic Result
Water Absorption	C373	< 7.0%	< 20.0%	< 3.0%
Breaking Strength	C648	> 250 lbs	120-230 lbs	> 250 lbs
Scratch Hardness	MOHS	8.0	4.0-6.0	7.0
Chemical Resistance	C650	Resistant	Resistant	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

1	Residential Bathrooms ③	All Residential / Light Commercial
2	All Residential Areas 4	All Residential / Commercial

CORE FUNDAMENTALS™ – PRIME


APPLICATION SPECIFICATIONS

PRIME – RL20 | RL21 | RL23

APPLICATIONS	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓*
Wet & Level – Interior Floor	≥ 0.42	✓*
Shower Floors (Residential or Light Commercial)	≥ 0.42	✓**
Shower Floor – Linear drain	≥ 0.60	✓**
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓*
Pool Linings	N/A	✓**

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:
Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.
* Wall tile not suitable for this application
** Mosaic tile only

INSTALLATION	
Grout Joint Recommendation	Shade Variation
Floor: 3/16" (Overlap should not exceed 33% when installing tile with a length 15" or greater in a staggered brick-joint pattern.)	
Wall: 10 x 14: 1/16" 4 x 16: 1/16" (When rectangular size is installed in a staggered brick-joint pattern, overlap should not exceed 33%)	 High (V3)
Mosaic: 1/8"	

PERFORMANCE CHARACTERISTICS	ASTM#	Floor Result	Wall Result	Mosaic Result
Water Absorption	C373	< 7.0%	< 20.0%	< 3.0%
Breaking Strength	C648	> 250 lbs	120-230 lbs	> 250 lbs
Scratch Hardness	MOHS	8.0	4.0-6.0	8.0
Chemical Resistance	C650	Resistant	Resistant	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.


DURABILITY	
Floor Surface Wear Resistance	
1 Residential Bathrooms ③	All Residential / Light Commercial
2 All Residential Areas 4	All Residential / Commercial

PRIME – 1500 | 2011

APPLICATIONS	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:
Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

INSTALLATION	
Grout Joint Recommendation	Shade Variation
3/16"	 Low (V1)

PERFORMANCE CHARACTERISTICS	ASTM#	Result
Water Absorption	C373	< 7.0%
Breaking Strength	C648	> 250 lbs
Scratch Hardness	MOHS	7.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

DURABILITY	
Floor Surface Wear Resistance	
1 Residential Bathrooms ③	All Residential / Light Commercial
2 All Residential Areas 4	All Residential / Commercial



Photo features Core Fundamentals Choice Iron 12 x 12 on the floor.

