



FLOOR | WALL | COUNTERTOPS

PANORAMIC

porcelain surfaces™

 daltile®

PANORAMIC

porcelain surfaces™

2	INTRODUCTION
6	THICKNESS & SIZE
10	FLEXFIT™ SIZE SOLUTIONS
12	APPLICATIONS
14	ELEMENTAL SELECTION
	IMPERIAL STATUS
	ZEBRA CALACATTA
	SAPPHIRE STATUS
	ANTHRACITE
	OPALITE
	CALACATTA TOPAZ
	CALACATTA ARIES
	GYPSUM CALACATTA
	DIAMOND MINE
	STATUARIO
	CALACATTA
	MOONSTONE
	OPAL TRAVERTINE
	TITANIUM GREY
	JASPER GREY
	ONYX GALAXY
	MARFIL
	BLANC
	WHITE JADE
	SMOKED GEODE
	SUNSTONE
84	INDUSTRIAL SELECTION
	MANOR WHITE
	CINDER RAIL
	CHARRED NICKEL
	BELMONT TERRACE
	VICKERY TAUPE
	STONEWALL COAL
	HEARTH SMOKE
100	METALLIC SELECTION
	CHROMIUM
	BRASS
	OBSIDIAN
110	EXTERIOR APPLICATION
112	VENTILATED FAÇADE
114	FACE VARIATIONS
120	OVERVIEW OF INSTALLATION INSTRUCTIONS
122	HANDLING, FABRICATION, AND INSTALLATION
124	KEYS TO SUCCESSFUL INSTALLATION

SLAB

USAGE

FLOOR

WALL

COUNTERTOP

SHOWER FLOOR

EXTERIOR*

SPECIAL FEATURES

STEPWISE

TRU-EDGE

MADE IN THE U.S.A.

LARGE FORMAT

MOSAIC/DECO

ENCAUSTIC

TERRAZZO

PAVER

CUSTOMIZE

FLEXFIT

P

LOW

HIGH

SEE CHARTS FOR FULL PRODUCT DETAILS

*EXCLUDES EXTERIOR FLOOR

INTRODUCING SURFACES LIKE YOU'VE NEVER SEEN THEM BEFORE.

Panoramic Porcelain Surfaces™ features porcelain that performs and design that delivers for your walls, floors and countertops. This collection offers breathtaking views, stunning visuals and seamless design with no boundaries.

THE POSSIBILITIES: LIMITLESS

With Panoramic Porcelain Surfaces™, you have a unique opportunity to let your imagination run wild. If you've ever dreamt of using limestone slab in places limestone should never be used, Panoramic can help you make those dreams come true. Or, if you've ever wished you could bathe a room in marble, now you can create that look at a fraction of the cost.



SEE WHERE YOUR
IMAGINATION TAKES YOU.






NOMINAL SLAB SIZES

63" x 126" (6mm) & 64" x 127" (12mm) & 48" x 96" (6mm)*

*Available in Statuario CM03 and Diamond Mine CM12 only

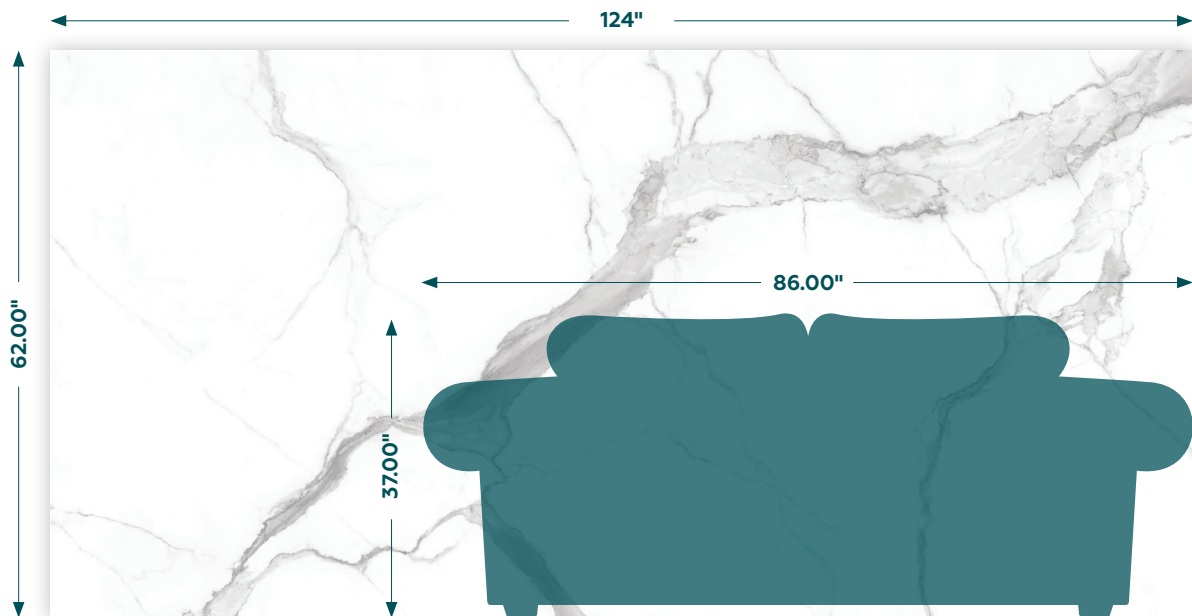

THICKNESS: 6 MM

THICKNESS: 12 MM

12 mm available only in select SKUs






EXPLORE ENDLESS
POSSIBILITIES.



ASK ABOUT OUR **FLEXFIT™** GUIDE
A CUSTOM CUT TO SIZE PROGRAM

customquote@daltile.com

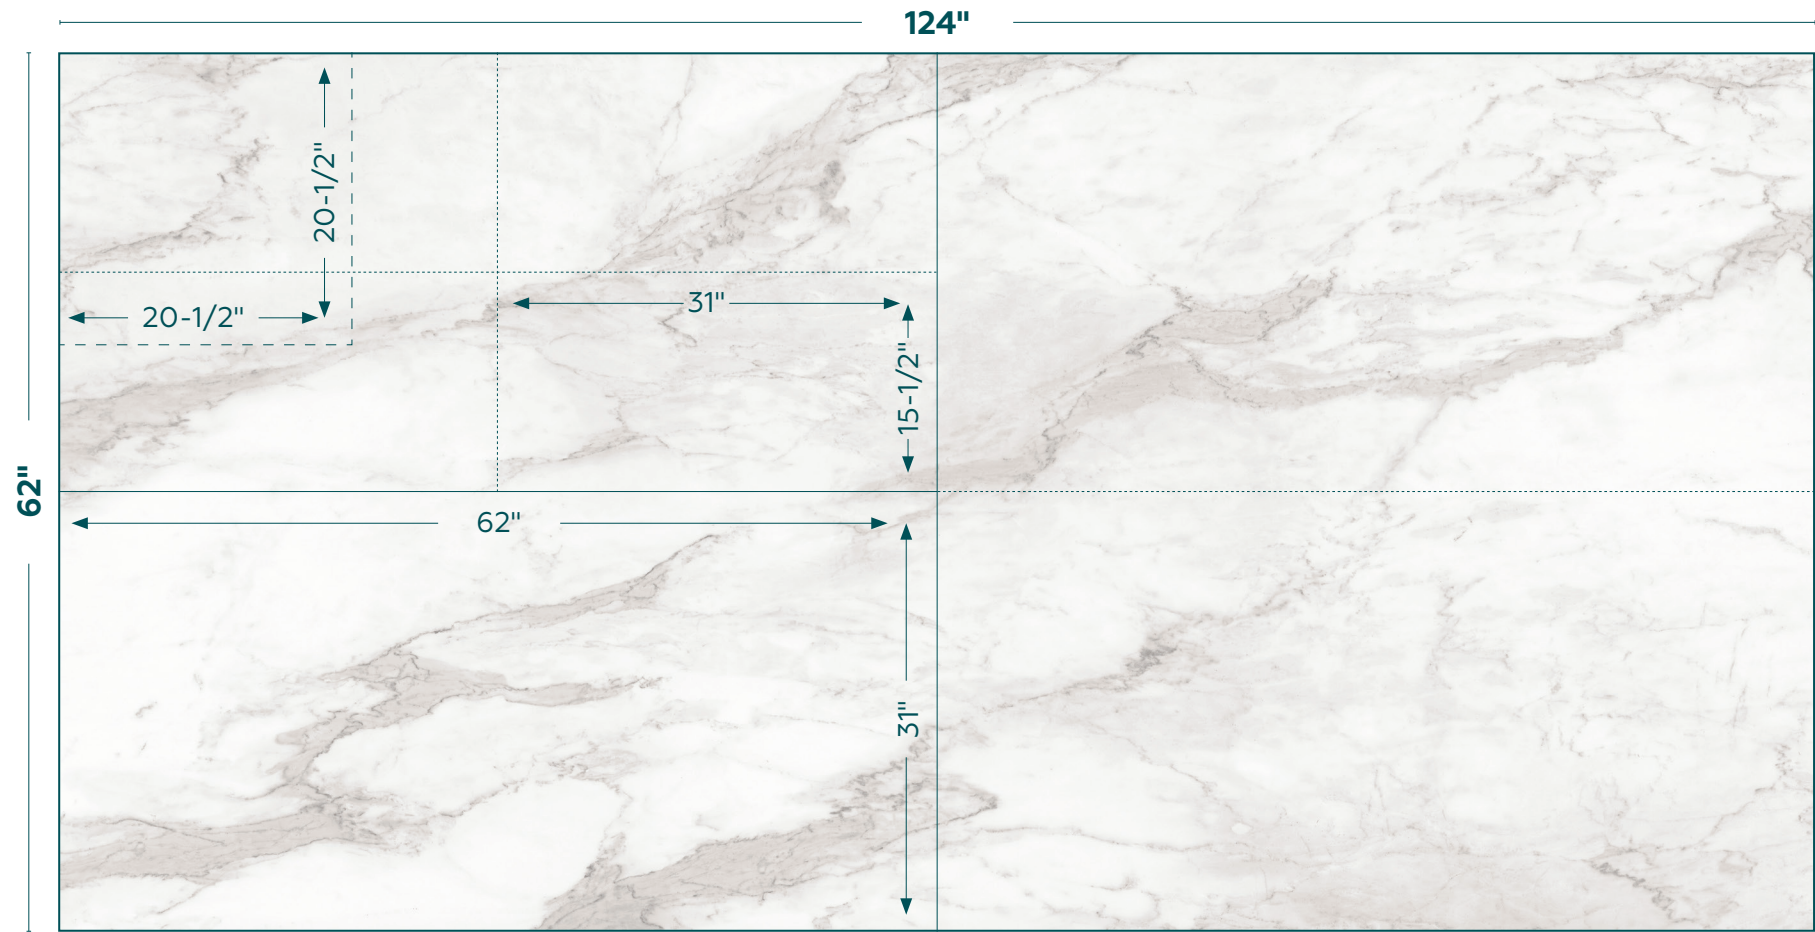

STANDARD SIZES AVAILABLE*:
(6 mm or 12 mm)



- ONE **SLAB** | 7 SIZES | **ALL** PANORAMIC PORCE-LAIN SURFACES™ COLORS
- SEAMLESS DESIGN WITH **NO LIMITATIONS**
- THE LOOK OF NATURAL STONE & CONCRETE AND THE **DURABILITY OF PORCELAIN**
- REDUCE INSTALLATION TIME & COST WITH THIS PERFECT **TILE OVER TILE SOLUTION**

* Custom sizes as well as modular sizes for pattern installations available. All requests subject to minimum order quantities & lead times. Contact us for details & pricing.
** 126" x 63" for 6 mm and 127" x 64" for 12 mm



FLOORS &
WALLS

SHOWER WALLS &
BATHROOMS

INTERIOR &
EXTERIOR COUNTERTOPS

DOORS &
FIREPLACES

EXTERIOR WALLS &
FAÇADES

WATERLINING





SET THE STAGE FOR LUXURY

ELEMENTAL SELECTION



Elevate the ambiance of virtually any space with the sophisticated marble looks within Elemental Selection.

Create drama with striking vein patterns, or infuse tranquility with subtle marbling designs. Large format slabs create fewer grout lines for a more seamless appearance in both glossy and matte finishes. By combining the look of natural stone with the value and ease of porcelain, Elemental Selection reinvents classic décor.



BLANC CM05

MARFIL CM06

MOONSTONE CM11

CALACATTA CM04

OPALITE CM55


WHITE JADE CM56

STATUARIO CM03

DIAMOND MINE CM12

GYPSUM CALACATTA CM22

CALACATTA ARIES CM21

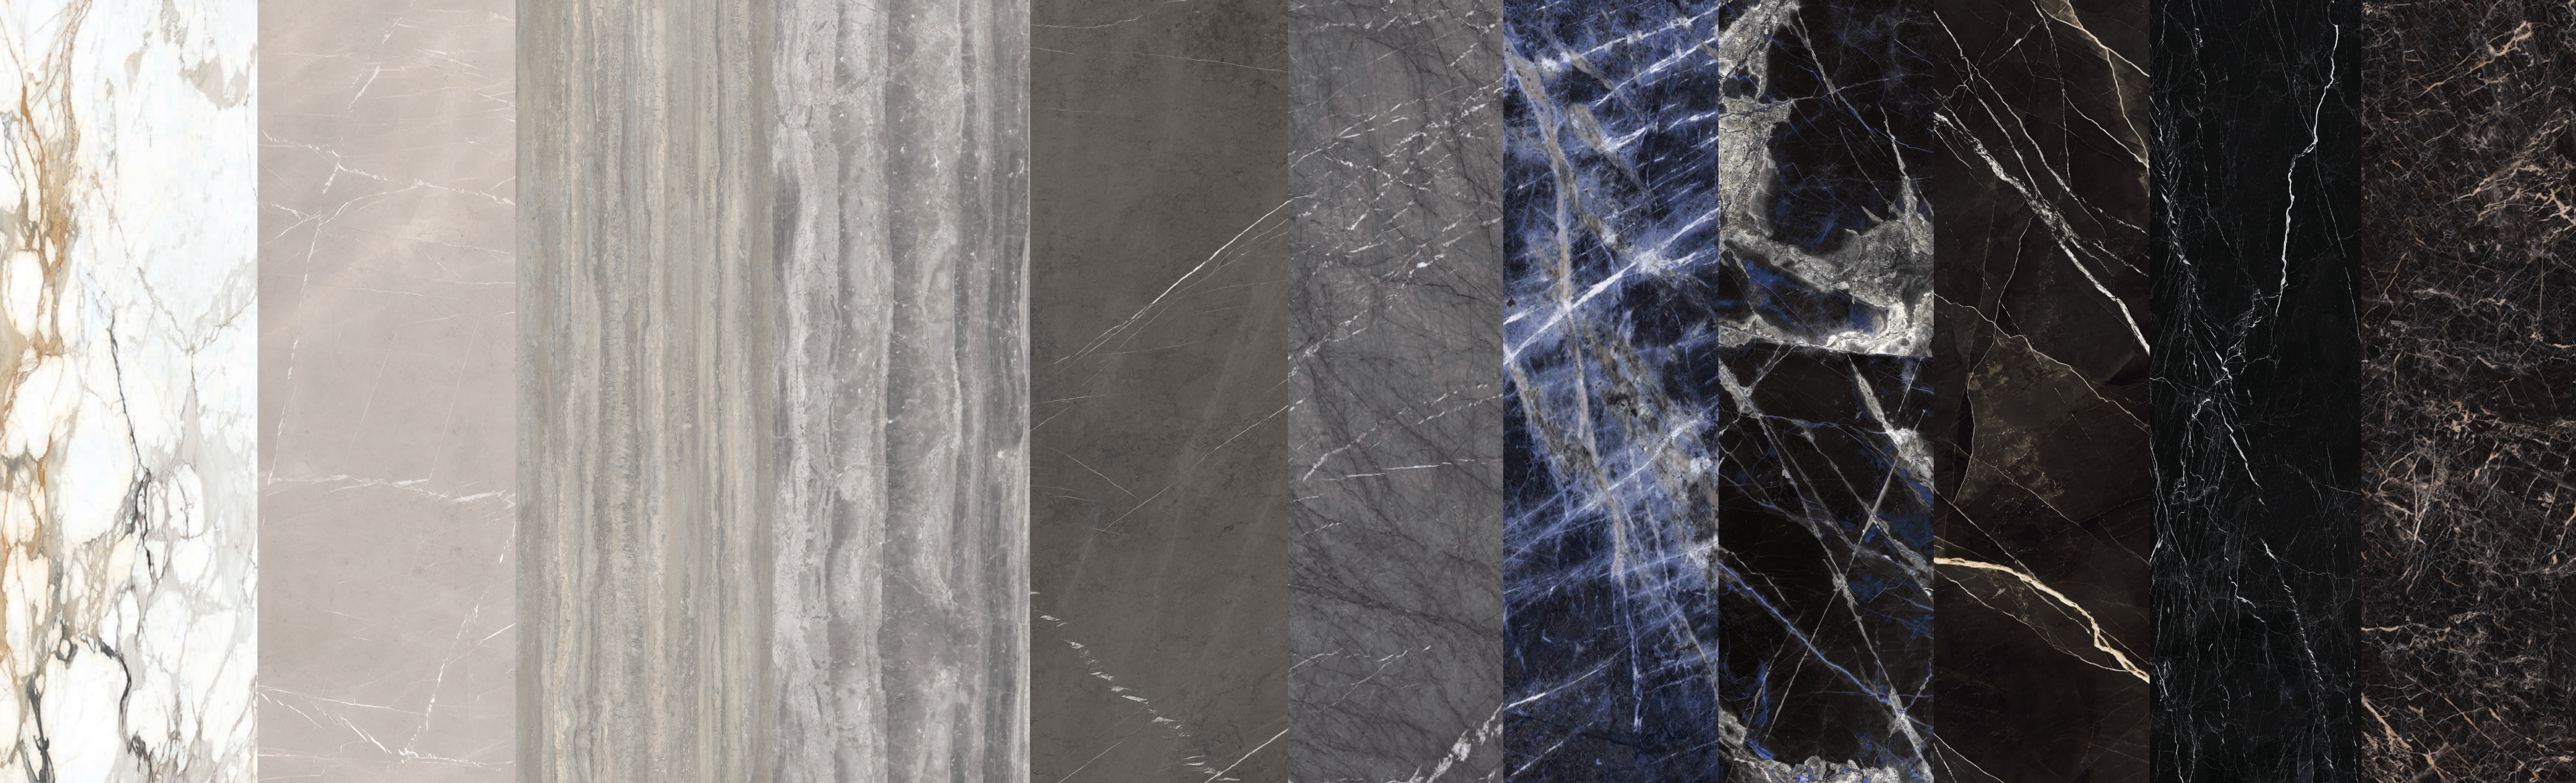

CALACATTA TOPAZ CM82

SMOKED GEODE CM58

OPAL TRAVERTINE CM84

TITANIUM GREY CM13

SUNSTONE CM57

JASPER GREY CM81


SAPPHIRE STATUS CM87

IMPERIAL STATUS CM54

ZEBRA CALACATTA CM59

ANTHRACITE CM85

ONYX GALAXY CM14

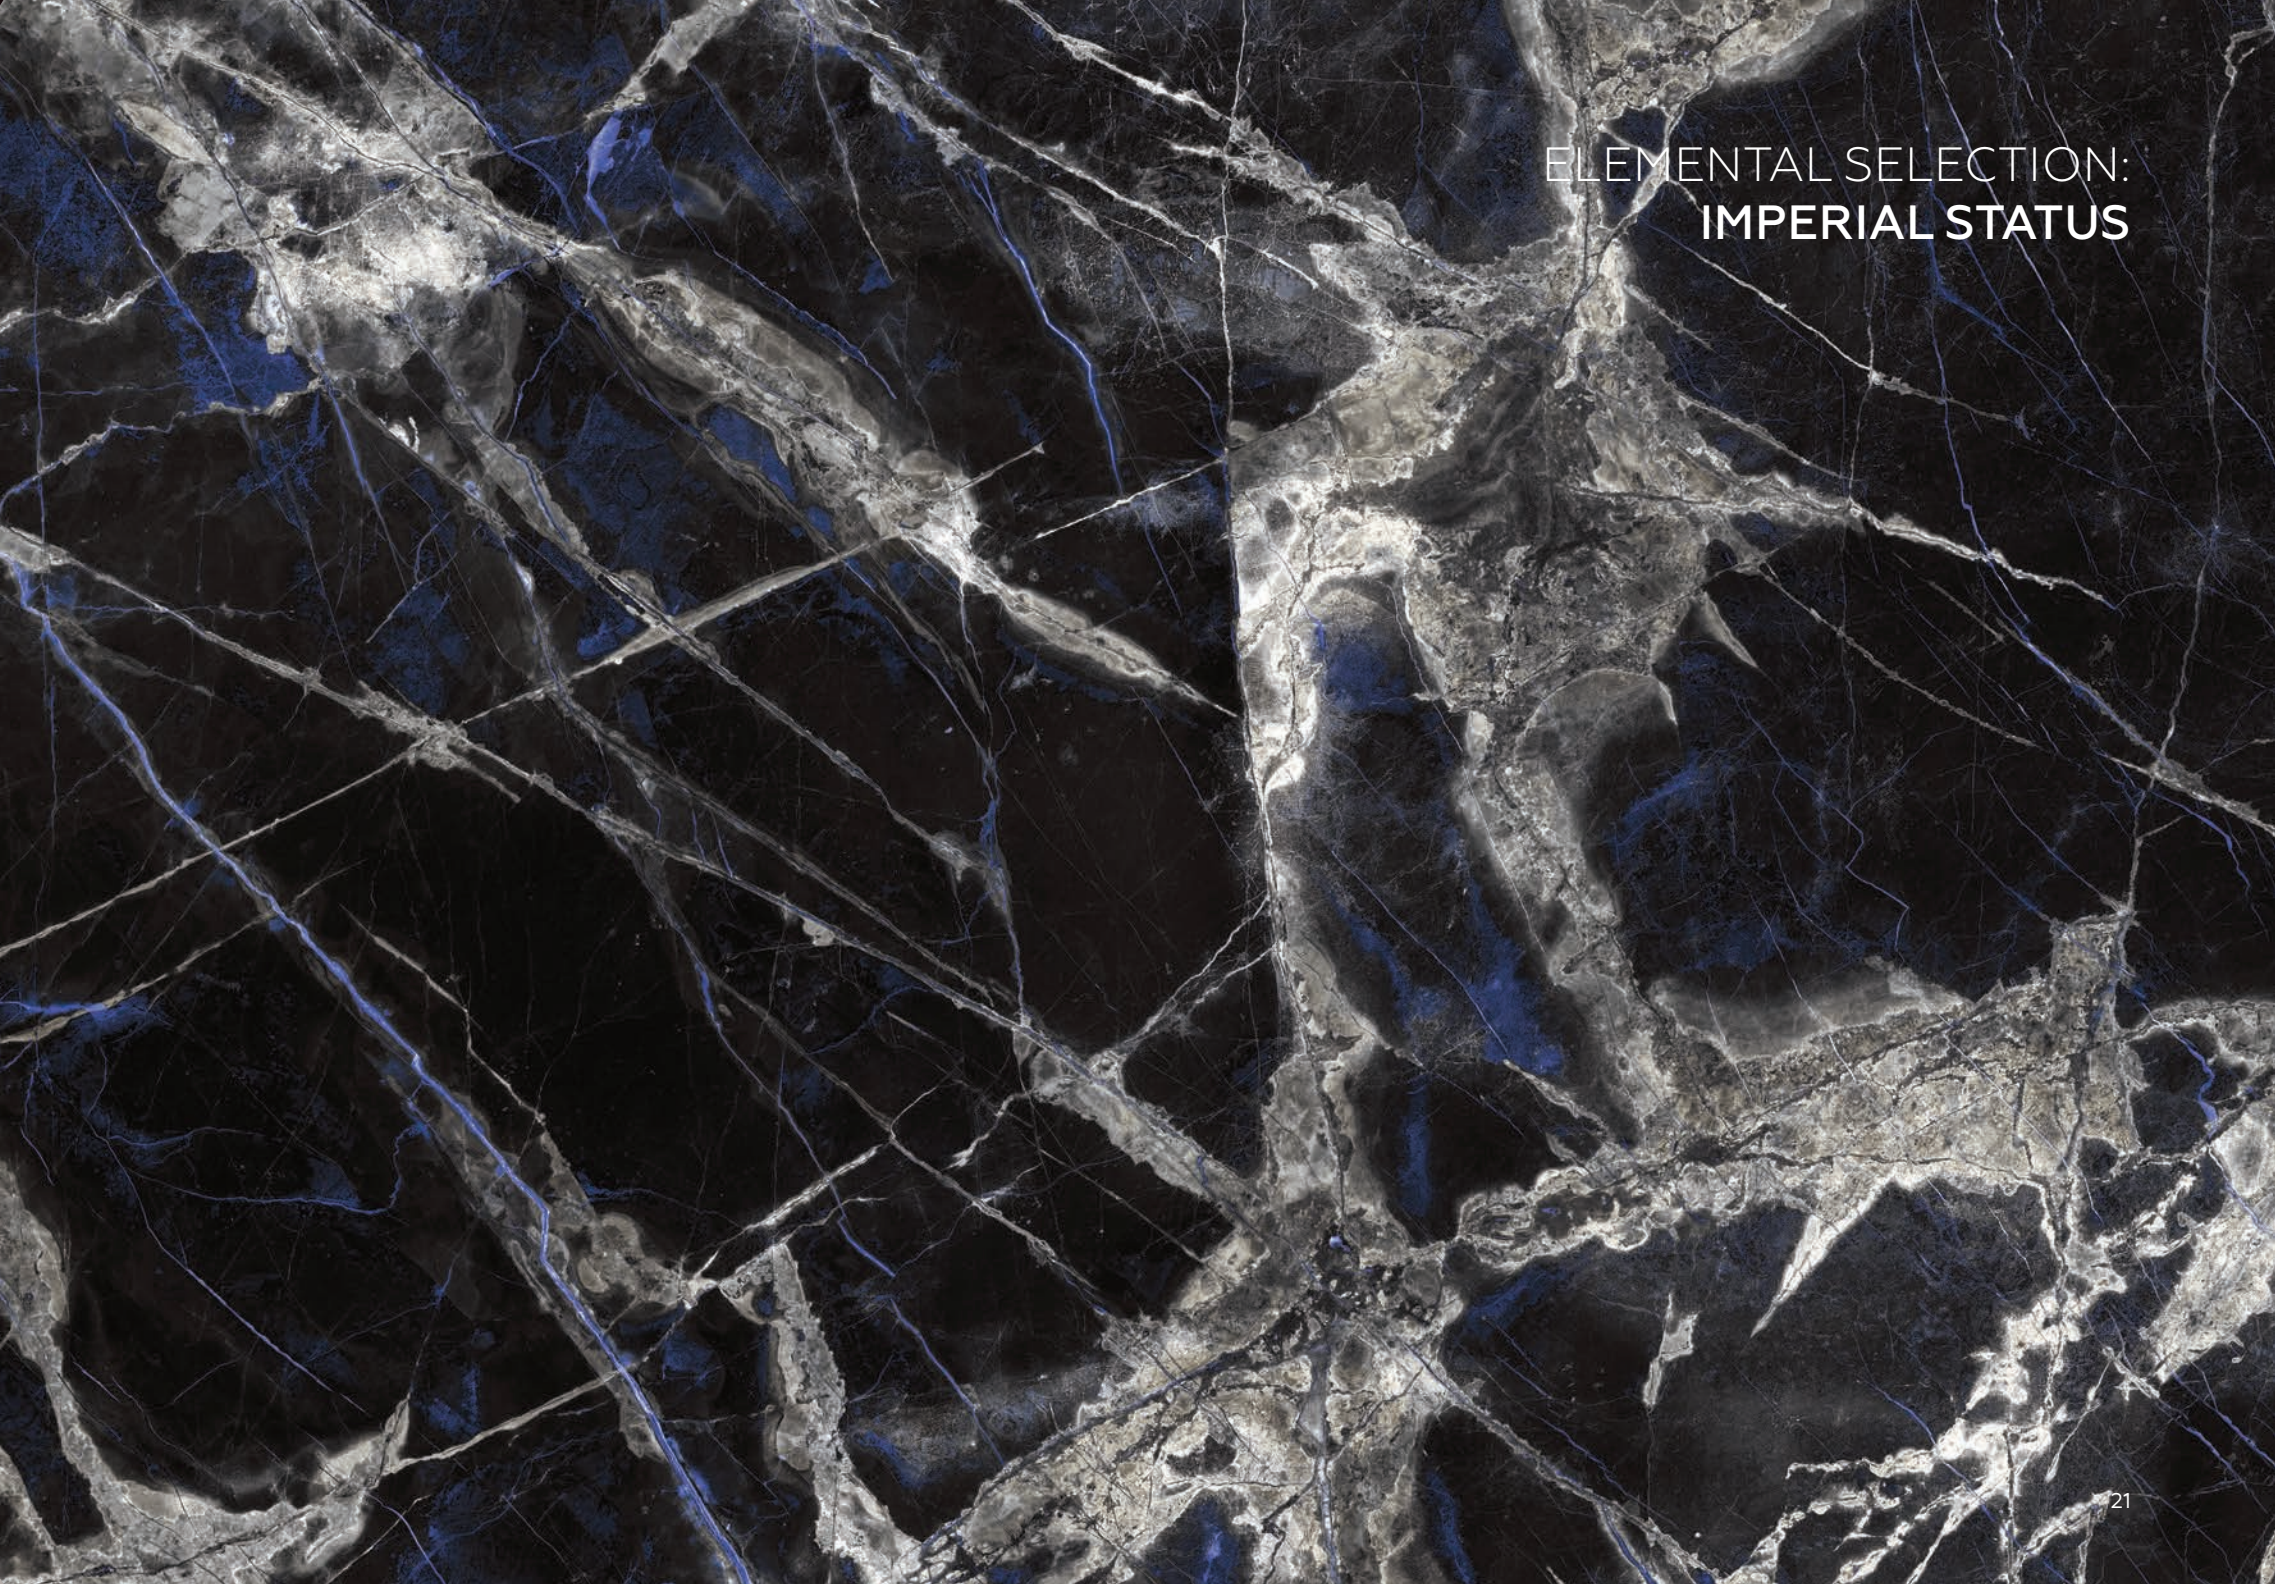

ELEMENTAL SELECTION:
IMPERIAL STATUS

BOOK MATCH

(AVAILABLE IN 6 MM ONLY)



ELEMENTAL SELECTION:
ZEBRA CALACATTA

BOOK

MATCH

(AVAILABLE IN 6 MM AND 12 MM)

ELEMENTAL SELECTION:
SAPPHIRE STATUS

BOOK MATCH

(AVAILABLE IN 6 MM ONLY)

ELEMENTAL SELECTION:
ANTHRACITE



BOOK MATCH

(AVAILABLE IN 12 MM ONLY)



ELEMENTAL SELECTION:
OPALITE

OPALITE

BOOK MATCH

(AVAILABLE IN 6 MM AND 12 MM)



ELEMENTAL SELECTION:
CALACATTA TOPAZ



BOOK MATCH

(AVAILABLE IN 12 MM ONLY)

ELEMENTAL SELECTION:
CALACATTA ARIES

BOOK MATCH

(AVAILABLE IN 6MM & 12MM)

ELEMENTAL SELECTION:
GYPSUM CALACATTA



BOOK MATCH

(AVAILABLE IN 6MM & 12MM)



ELEMENTAL SELECTION:
DIAMOND MINE

DIAMOND MINE

BOOK

MATCH

(AVAILABLE IN 12 MM ONLY)



ELEMENTAL SELECTION:
STATUARIO

BOOK

MATCH

(AVAILABLE IN 12 MM ONLY)



ELEMENTAL SELECTION:
CALACATTA

CALACATTA

BOOK

MATCH

(AVAILABLE IN 12 MM ONLY)

ELEMENTAL SELECTION:
MOONSTONE






ELEMENTAL SELECTION:
OPAL TRAVERTINE

ELEMENTAL SELECTION:
TITANIUM GREY



ELEMENTAL SELECTION:
JASPER GREY

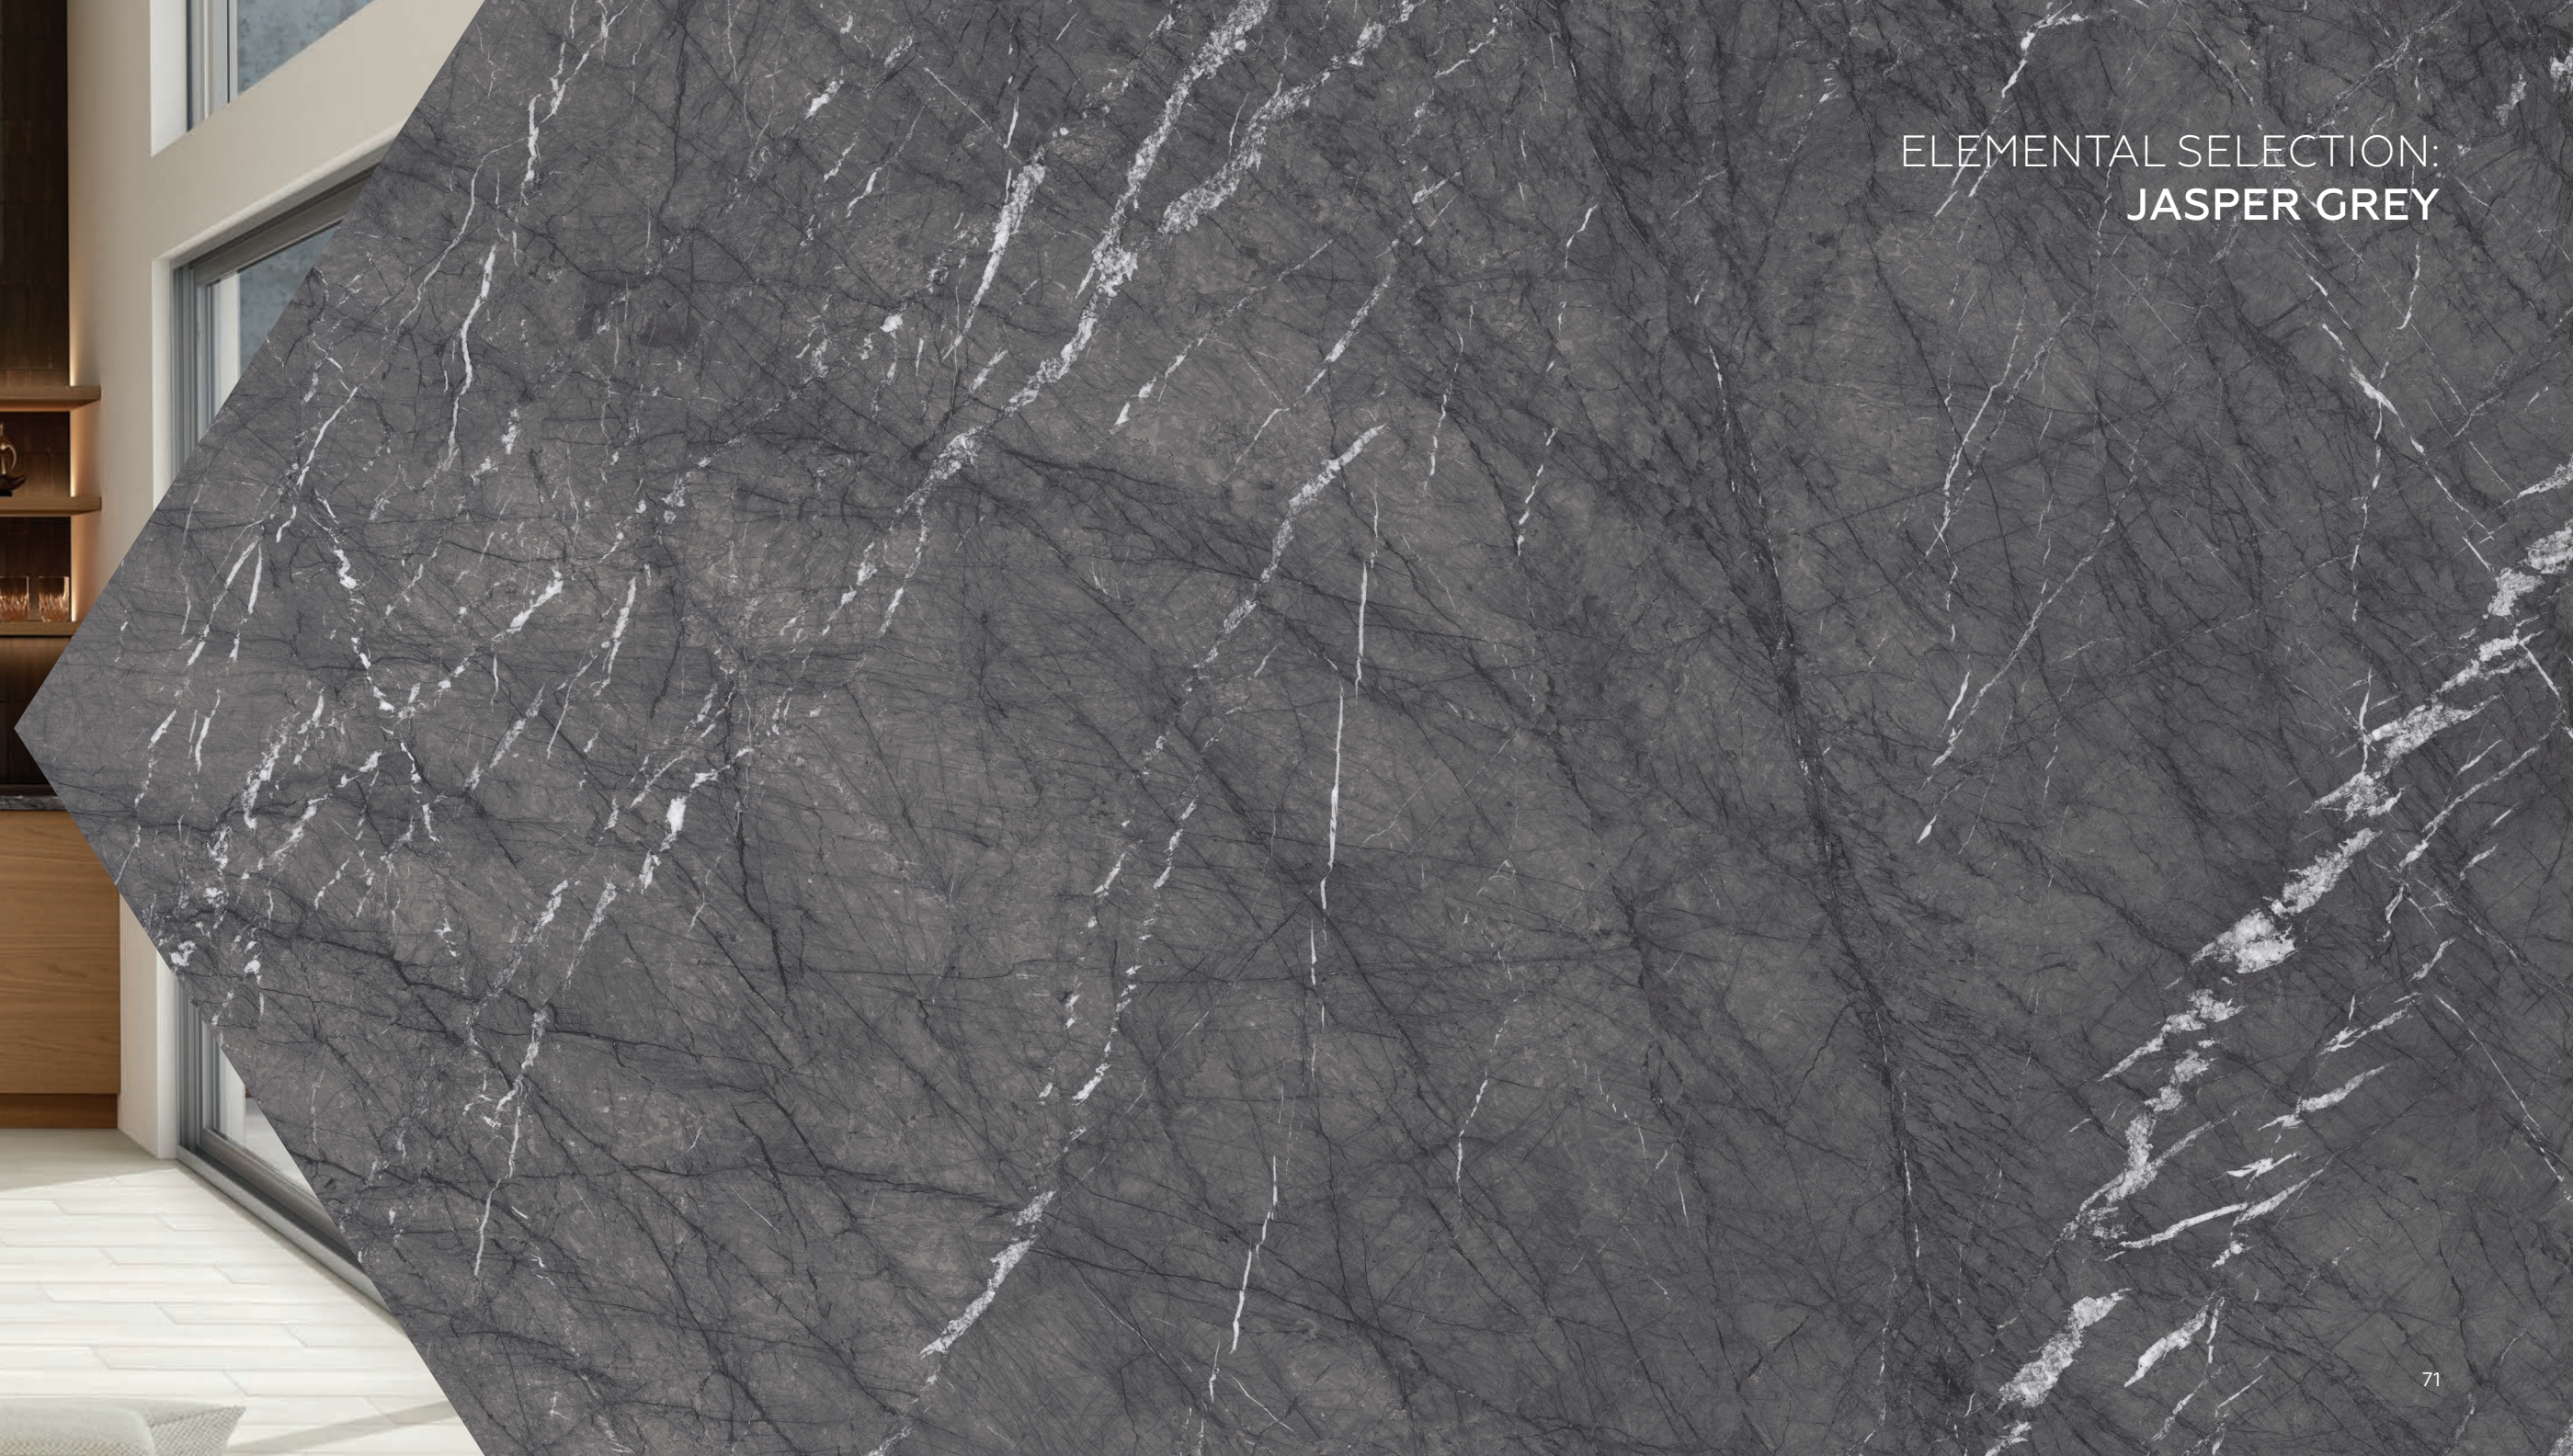

ELEMENTAL SELECTION:
ONYX GALAXY





ELEMENTAL SELECTION:
MARFIL



ELEMENTAL SELECTION:
BLANC



ELEMENTAL SELECTION:
WHITE JADE



ELEMENTAL SELECTION:
SUNSTONE





ELEMENTAL SELECTION:
SMOKED GEODE

INSPIRING RUGGED FLEXIBILITY

INDUSTRIAL SELECTION

Capture a sense of strength and character with Industrial Selection.

Bring the urban chic feel of a downtown gallery or loft to virtually any space with the look of sleek concrete. Large format slabs provide seamless style to more closely mimic the essence of poured concrete while the smooth, matte finish adds a touch of sophistication. Infuse your space with the robust, stoic presence of concrete while enjoying the versatility of porcelain tile with Industrial Selection.



MANOR WHITE CM18

BELMONT TERRACE CM07

STONEWALL COAL CM09

CINDER RAIL CM17

HEARTH SMOKE CM08

CHARRED NICKEL CM16



INDUSTRIAL SELECTION:
MANOR WHITE



INDUSTRIAL SELECTION:
CINDER RAIL

INDUSTRIAL SELECTION:
CHARRED NICKEL



INDUSTRIAL SELECTION:
BELMONT TERRACE



INDUSTRIAL SELECTION:
STONEWALL COAL



INDUSTRIAL SELECTION:
HEARTH SMOKE

UNREFINED URBAN GLAMOUR

METALLIC SELECTION

Dazzle with the glitz and glam of the Metallic Selection.

Dripping with design and opulence, the reflective, iridescent metallic sheen encompassed on these sleek slabs takes fashion to new heights. The unrefined essence of concrete enhanced with mixed metals is provided on a scale only large format porcelain slabs can reach. Experience glimmering style with Metallic Selection.



CHROMIUM CM19



BRASS CM86



OBSIDIAN CM20



METALLIC SELECTION:
CHROMIUM



METALLIC SELECTION:
BRASS





METALLIC SELECTION:
OBSIDIAN

EXTERIOR APPLICATION



VENTILATED FAÇADE





FACE VARIATIONS

ELEMENTAL SELECTION:

STATUARIO CM03 – 6MM



STATUARIO CM03 – 6MM & 12MM



WHITE JADE CM56 – 6MM



DIAMOND MINE CM12 – 6MM



DIAMOND MINE CM12 – 12MM




OPALITE CM55 – 6MM



GYPSUM CALACATTA CM22 – 6MM



GYPSUM CALACATTA CM22 – 12MM

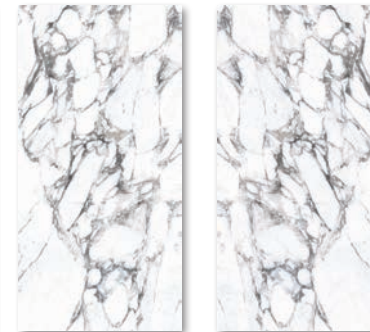

CALACATTA ARIES CM21 – 6MM



CALACATTA ARIES CM21 – 12MM



ELEMENTAL SELECTION:


CALACATTA CM04 – 6MM




CALACATTA CM04 – 12MM



ZEBRA CALACATTA CM59 – 6MM

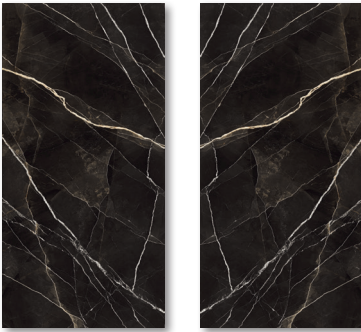

ZEBRA CALACATTA CM59 – 12MM

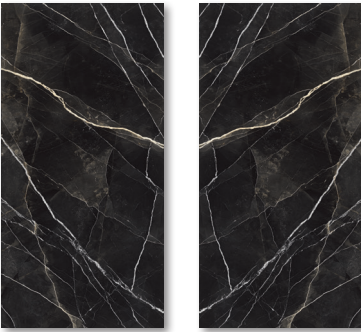



CALACATTA TOPAZ CM82 – 6MM




CALACATTA TOPAZ CM82 – 12MM




ONYX GALAXY CM14 – 6MM

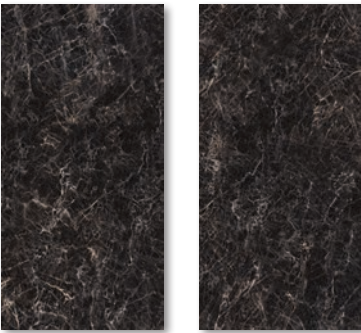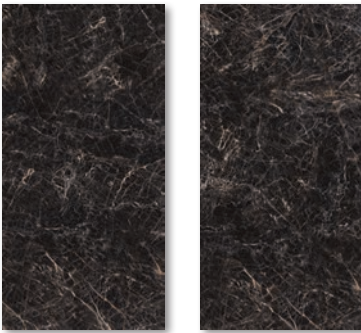


JASPER GREY CM81 – 6MM

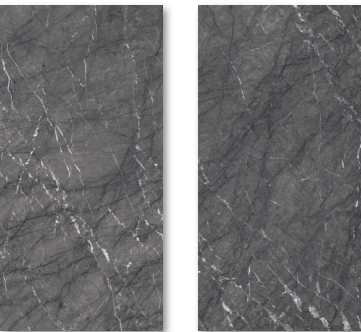


JASPER GREY CM81 – 12MM

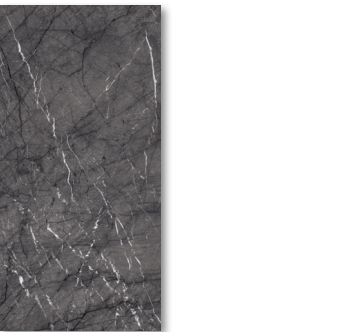

IMPERIAL STATUS CM54 – 6MM

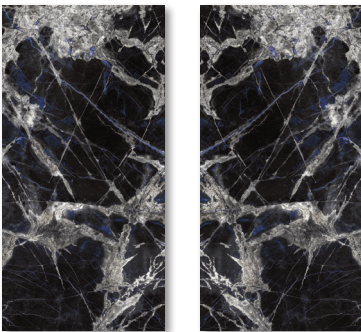


SAPPHIRE STATUS CM87 – 6MM

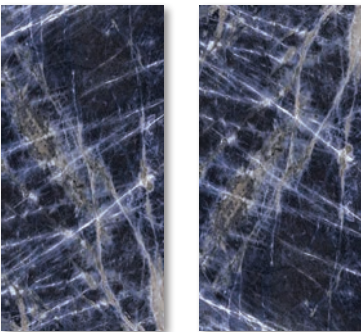

ELEMENTAL SELECTION:

MOONSTONE CM11 – 6MM

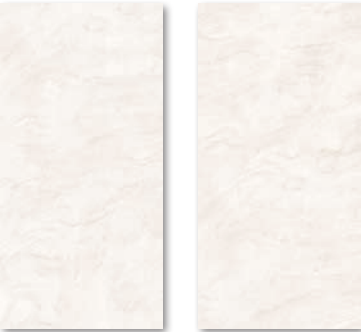

MARFIL CM06 – 6MM



OPAL TRAVERTINE CM84 – 6MM



BLANC CM05 – 6MM



SUNSTONE CM57 – 6MM



SMOKED GEODE CM58 – 6MM



TITANIUM GREY CM13 – 6MM




ANTHRACITE CM85 – 6MM



INDUSTRIAL SELECTION:

MANOR WHITE CM18 – 6MM & 12MM



CINDER RAIL CM17 – 6MM



CHARRED NICKEL CM16 – 6MM




BELMONT TERRACE CM07 – 6MM



STONEWALL COAL CM09 – 12MM



HEARTH SMOKE CM08 – 12MM



METALLIC SELECTION:

CHROMIUM CM19 – 6MM



OBSIDIAN CM20 – 6MM



BRASS CM86 – 6MM



OVERVIEW OF INSTALLATION INSTRUCTIONS

MINIMUM
CAULK/GROUT JOINT
RECOMMENDATIONS

LIPPAGE CONTROL
SYSTEMS ARE REQUIRED

SUBSTRATE FLATNESS

SETTING MATERIAL
RECOMMENDATIONS

CLADDING		FLOORING	
INTERNAL	EXTERNAL	INTERNAL	EXTERNAL
Minimum caulk/grout joint of 1/8" inch for areas away from direct sunlight. 3/16" inch minimum caulk expansion joints every 24 feet in each direction or less, depending on the installation system chosen.	Minimum caulk joint width of 3/16" inch for field joints and minimum 1/4" inch caulk expansion joints every 12 feet in each direction.	A minimum grout joint of 1/8"	N/A
For areas in direct sunlight, please consult with setting material and tile manufacturer for recommendations based on the specific details of the project in question.	For darker colors in direct sunlight, field and expansion joint sizes may need to be increased, to allow for thermal expansion of the wall system. Please consult setting material and tile manufacturer for more details.		
yes	yes	yes	N/A
Maximum allowable variation in flatness is 1/8" in 10' feet and 1/16" in 2' from the required plane when measured from the high points in the surface, per ANSI A 108.19.			N/A
This is for both interior and exterior applications and is applicable for all tile with a size greater than 15" in one or more dimensions.			
Please refer to ANSI A108.19 and setting materials manufacturers for the specific recommended products, for your projects requirements.			N/A

APPLICATIONS

	TARGET DCOF WET	SUITABLE
Dry & Level – Interior Floor	N/A	●
Wet & Level – Interior Floor	≥ 0.42	●*
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	●
Countertops	N/A	●
Pool Linings	N/A	●

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest™, visit daltille.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications in freezing and non-freezing climates, when proper installation methods are followed.

* Matte finish only.

WARNING: This product can expose you to chemicals known to the State of California to cause cancer, including crystalline Silica (airborne particles of respirable size) in dust created if the product is dry cut/ground/polished or pulverized during fabrication/installation/removal. For more information, go to www.P65Warnings.ca.gov.

HANDLING & FABRICATION

HANDLING

When receiving Panoramic Porcelain Surfaces in quantity for warehousing stock or for a project, you will need a forklift with 8-foot forks or 8-foot fork extensions. The panels will come packed on an A-frame. When offloading or loading A-frames, an Abaco glass lifter attached to a boom on a forklift or indoor crane is recommended. You should never attempt to lift or move porcelain panels with granite clamps!

If unpacking Panoramic Porcelain Surfaces off an A-frame, place a soft jaw clamp over the panels at one end to secure prior to removing factory banding/strapping. Panoramic slabs of 6mm thick weigh 2.92 lbs. per sq. ft. and panels of 12mm thick weigh 5.84 lbs. per sq. ft. The most common moving procedure for 6mm is two people equipped with the ETM grip or the ETM slide. With 12mm, you need at least 3 people equipped with the ETM grip. Additional option for handling 12mm, is using the ETM double slide with pump cups. Identify destination and have protection in place prior to moving. It's a good idea to use corner protectors. Purpose-built tools are available for proper handling of Panoramic Porcelain Surfaces.

TRANSPORT

If picking up Panoramic Porcelain Surfaces at supplier's facility, use a suitably sized A-frame that offers cushioned/proper protection at all contact points. Use suitably sized vehicle to house and carry the A-frame. Always strap Panoramic slabs to the A-frame and the A-frame to the vehicle. Never clamp Panoramic slabs during transport, as damage/breakage may result. Contractors can pick up Panoramic Porcelain Surfaces slabs at Daltile facilities as well as transport up to 30 pieces of 6mm slabs to the job site using the ETM Trailer Frame. For job site and shop movement, the ETM Transporter can store up to 16 pieces of 6mm, or 8 pieces of 12mm slabs. A-Frame's are ideal for moving up to two slabs.

FABRICATION

The most important part of fabricating/cutting Panoramic Porcelain Surfaces is a flat, sturdy surface of supportive size. Tables designed for use with porcelain slabs are available.

For 6mm thickness, pre-application of 1/2" thick high-density foam backer board to support Panoramic Porcelain Surfaces is recommended prior to fabrication of sink holes or other at countertops, for rigidity and strength during installation. With the backer pre-installed, the fabricated countertops can be installed over 3/4" plywood set on top of cabinets.

For 12mm thickness, pre-application of 1/2" backerboard is recommended to support Panoramic Porcelain Surfaces over 3/4" plywood installed on cabinets. The backerboard provides additional support for aprons and turndown edges. Panoramic Porcelain Surfaces should not be applied directly to plywood attached to cabinets. 6mm and 12mm Panoramic slabs can be installed directly over existing natural stone and other solid surface tops.

Standard cutting is easiest done by the score-and-break process for straight cuts. "L", "U", and dropout cuts first must have a hole drilled through the porcelain slab with a 3/16" diameter or larger porcelain stoneware drill bit at the beginning and end of each cut line to relieve the pressure and prevent cracking. Miterring is commonly performed when fabricating Panoramic Porcelain Surfaces for countertop use. Acrylic or epoxy can be used to bond miters. Miters must be filled completely in order to protect finished edge from chipping or breaking. Use color kit and match accordingly. If bonding/filling mitered edge of veined material, mix one color to match veining and another color to match body. Fill accordingly.

HANDLING AND FABRICATION TOOLS

There are tools made specifically for Panoramic Porcelain Surfaces. Stone cutting blades do not work with porcelain slabs, however the good news is specific porcelain blades are available for relatively the same cost as stone cutting blades. Porcelain slab tools are also mobile and require very little, if any additional training to operate.

Contact your local Stone Center for recommended Tool Manufacturers suitable for Panoramic Porcelain Surfaces.

KEYS TO SUCCESSFUL INSTALLATION

Gauged Porcelain Slab installation requires particular attention to proper substrate preparation, grout joint sizing, trowel selection, and mortar coverage. It is critical that gauged porcelain slab be installed on a level substrate. Additionally, there must be at least 90% mortar contact, and the slab should be installed in accordance per the grout joint recommendations of each slab series. Refer to the published installation instructions prepared by your preferred manufacturer of setting materials for optimal tools and setting methods to achieve your desired result.

For proper bonding, LFT mortar must be used in installing tiles with a dimensional length greater than 15 inches on any one side of the tile. Back buttering slabs of this nature in the installation process will also assure proper coverage for bonding. For countertop applications using 6mm thickness, it's recommended to apply a backer board prior to cutting, mitering, etc.

SEAMING

Seams can be installed using the same process as natural stone tops, seam leveling tool, acrylic or epoxy for adherence. If backer board is used, make sure to bond backer board under porcelain at seam with proper adhesive.

INSTALLATION TIPS

- Installation of Daltile's Panoramic Porcelain Surfaces are basically the same as all other gauged porcelain slab, for floor and wall applications. Using proper tools is a must for a successful handling and installation.
- Important install notes
 - Substrate must be within 1/8" variance in 10 feet.
 - LFT mortar must be used with zipper notch type trowels.
 - Back butter all slab for complete mortar coverage.
 - Lippage control device system must be used on all joints.
 - De-airing with beating block on walls and walking on from center out on floors, to ensure complete mortar coverage.
- Handling
 - Pick materials up with grip and suction cup, minimum three people.
 - It's big, it's lightweight but it requires the right tools to handle it. Safety first.
 - Equipment to help with transport, handling, cutting, fabrication, delivery and installation.

VERTICAL WALL

- Handling both 6mm and 12mm
- Accessories required for handling slab
- Substrate and substrate preparation
- Strict flatness requirements related to 6mm
- Trowel-applied patching compound, waterproofing and crack isolation membranes
- Selecting right installation product or project

COUNTERTOP

- Handling both 6mm and 12mm
- Standard tooling
- Continuous rim porcelain blades only, not to exceed 5-inch diameter in hand-held tools. For larger shop saws, maximum 9-inch diameter – Grinding Discs (refining and trimming edges) – Silicon Carbide and Felt Polishing pads – Acrylic or Epoxy w/color matching pigments – Standard Core Drill bits
- Sinks – Under Mount, Over Mount and Flush
- Substrate required
- Seaming procedure for countertop
- Mitered Edge Profiling – good training and education very important

HOUSEHOLD CLEANERS RECOMMENDED FOR DAILY USE:

- Windex
- Baking Soda
- Ammonia
- Lysol Gel with Magic Eraser for tough stains
- Brasso gel with Magic Eraser for metallic stains or marks
- All PH neutral cleaners

Panoramic is resistant to heat, stains, scratches and household chemicals.

FOR MORE IN DEPTH INFORMATION, PLEASE REFER TO OUR FULL PANORAMIC TECHNICAL GUIDELINE.

PHOTOGRAPHY INDEX

FRONT COVER

Zebra Calacatta on the fireplace.

PAGES 3-4

Imperial Status on the wall.

Stonewall Coal on the countertop.

Charred Nickel on floors and walls.

PAGES 5-6

Cinder Rail on floors and walls.

Manor White on countertops and fireplace.

PAGES 8-10

Statuario on floors, walls and countertops.

Onyx Galaxy on bar and walls.

White Jade on floors and countertops.

PAGES 13-14

Opalite on floors, walls, and countertops.

Diamond Mine on floors and shower walls.

White Jade on countertop and backsplash.

Calacatta Topaz on the floor with Obsidian on the fireplace.

Smoked Geode on exterior facade walls.

Sapphire Status in pool waterlining.

PAGES 15-16

Smoked Geode on floors and walls.

Gypsum Calacatta on the walls.

PAGES 84-85

Hearth Smoke on countertop and floor.

Cinder Rail on floors and walls.

PAGES 100-101

Chromium and Obsidian on floors and walls.

Obsidian on floor and walls.

PAGES 111-113

Brass and Cinder Rail on exterior facade walls.

Mix of Hearth Smoke, Stonewall Coal, and Charred Nickel on exterior facade walls.

BACK COVER

Imperial Status on walls.

