

# PANORAMIC

porcelain surfaces™

## SHOWER WALL TAILORED SIZE



**PANORAMIC PORCELAIN SURFACES™** PROVIDES YOU WITH GREATER EASE OF INSTALLATION FOR SHOWER WALLS WITH A **NEW 48 x 96 SIZE**.



**STATUARIO CM03**

6mm – Glossy

*Bookmatch available*



**DIAMOND MINE CM12**

6mm – Glossy


*Bookmatch available*



**GYPSUM CALACATTA CM22**

6mm – Glossy

*Bookmatch available*

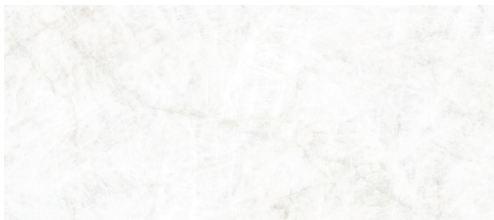

**OPALITE CM55**

6mm – Glossy

*Bookmatch available*



**LEMURIAN CM49**

6mm – Glossy

*Infinity Veining and Bookmatch available*



**SELENITE CM51**

6mm – Matte

**Bookmatch:** Slabs are crafted to create a mirrored pattern, offering a stunning symmetrical appearance in installations.

**Infinity Veining:** Slabs feature a continuous pattern, providing installations with a seamless and uninterrupted look.



In addition to reducing the amount of waste generated during installation, this smaller size contributes to a more seamless process. Featuring four of our most popular colors and two new designs, this size will serve every purpose.

**Note:** 48 x 96 nominal size | 47.2 x 94.5 actual size.



SCRATCH RESISTANT



HIGHLY STAIN RESISTANT



UNPARALLELED  
PERFORMANCE



ENGINEERED FOR  
CONSISTENCY

## APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓*
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	
Pool Linings	N/A	✓

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest™, visit [daltille.com/DCOF](https://daltille.com/DCOF).

## APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

\* Matte finish only.

## INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8"	 High (V3)

## FACE VARIATION




**STATUARIO CM03**  
2 FACES



**DIAMOND MINE CM12**  
2 FACES



**GYPSUM CALACATTA CM22**  
2 FACES



**OPALITE CM55**  
2 FACES



**LEMURIAN CM49**  
2 FACES



**SELENITE CM51**  
4 FACES

