

STONE LOOK

USAGE



FLOOR



WALL



COUNTERTOP



SHOWER
FLOOR



EXTERIOR
FLOOR



STEPWISE™



TRU-EDGE™



MADE IN
THE U.S.A.



LARGE
FORMAT



MOSAIC/
DECO



ENCAUSTIC



TERRAZZO



PAVER



CUSTOMIZE



FLEXFIT™



CG
SLATED
CONCRETE



LOW HIGH

SPECIAL FEATURES

CORE FUNDAMENTALS™ PRIME

THE **PRIME TIER** PROVIDES ALL THE ESSENTIAL BENEFITS OF TILE WHILE OFFERING AN ARRAY OF DIFFERENT LOOKS AND DECORATIVE ACCENTS TO HEIGHTEN DESIGN.

NOT APPLICABLE
FOR ALL PRODUCTS
IN THIS SERIES. SEE CHARTS
FOR FULL PRODUCT DETAILS.


CORE FUNDAMENTALS™ – PRIME
GLAZED CERAMIC FLOOR, WALL & MOSAICS

FINISHES: MATTE

FLOOR TILE



WHITE BA30

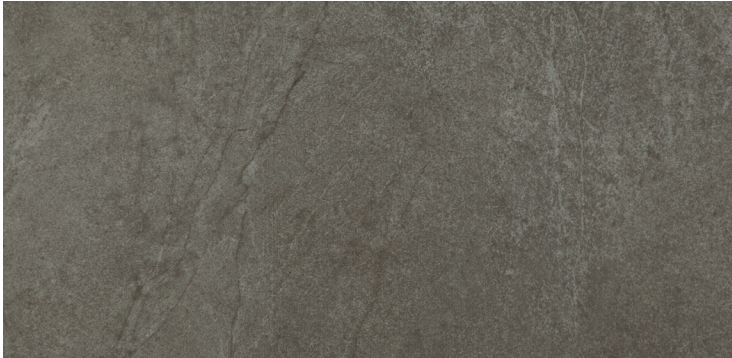


CHARCOAL BA34

10 x 14 WALL TILE



WHITE BA30

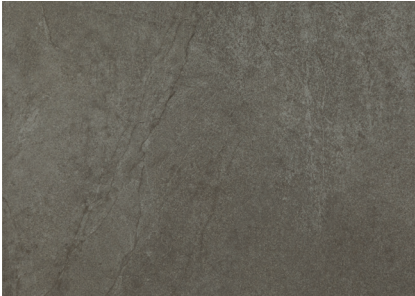

CHARCOAL BA34

2 x 4 MOSAIC – DOT-MOUNTED ON A 12 x 12 SHEET




WHITE BA30




CHARCOAL BA34


AVAILABLE TILE SIZES




18 x 18
Floor Tile




12 x 24
Floor Tile



12 x 12
Floor Tile




10 x 14
Wall Tile



2 x 4
Straight-joint Mosaic

FLOOR TILE



RAINIER 1500



BLACK 2011

AVAILABLE TILE SIZES



12 x 12
Floor Tile

CORE FUNDAMENTALS™ – PRIME


GLAZED CERAMIC FLOOR, WALL & MOSAICS

FINISHES: MATTE



Photo features Grey EL32 12 x 24 on the floor.

FLOOR TILE

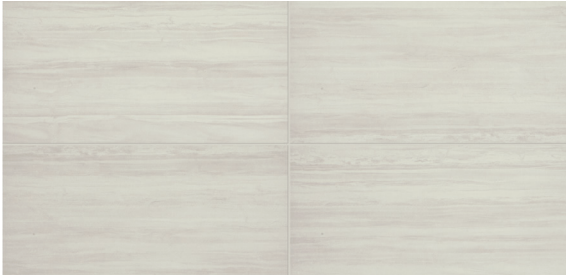

WHITE EL30



BEIGE EL31



GREY EL32

1 x 3 HERRINGBONE MOSAIC – DOT-MOUNTED ON A 9 x 12 SHEET



WHITE EL30



BEIGE EL31



GREY EL32

WALL TILE



WHITE EL30



BEIGE EL31



GREY EL32

AVAILABLE TILE SIZES



12 x 24
Floor Tile



4 x 12
Wall Tile



1 x 3
Herringbone Mosaic

FOR COMPLETE PRODUCT INFORMATION, PLEASE VISIT WWW.DAL TILE/CORE-FUNDAMENTALS

CORE FUNDAMENTALS™ – PRIME


GLAZED CERAMIC FLOOR, WALL & MOSAICS

FINISHES: MATTE | GLOSSY




Photo features Memoir Star Grey ME23 12x12 on the fireplace walls with Core Fundamentals Prime Grey KC04 12x24 on the floor.

FLOOR TILE

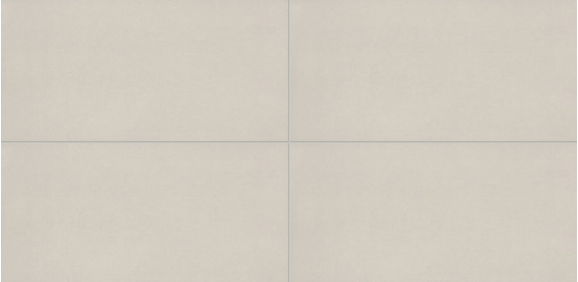

WHITE KC01

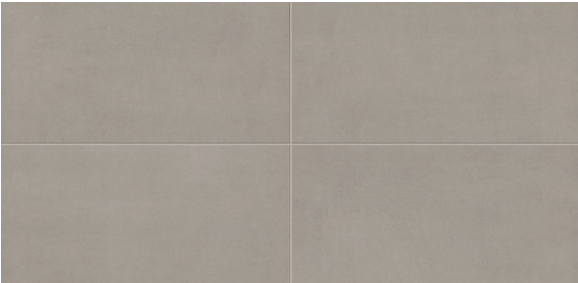


GREY KC04

2 x 2 MOSAIC – DOT-MOUNTED ON A 12 x 24 SHEET





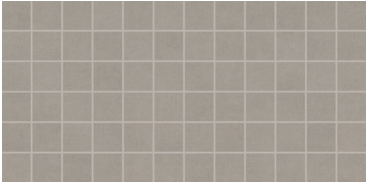


WHITE KC01



GREY KC04

AVAILABLE TILE SIZES

				
18 x 18 Floor Tile	12 x 24 Floor Tile	12 x 12 Floor Tile	4 x 12 Wall Tile	2 x 2 Mosaic

FOR COMPLETE PRODUCT INFORMATION,
PLEASE VISIT WWW.DAL TILE/CORE-FUNDAMENTALS

CORE FUNDAMENTALS™ – PRIME

GLAZED CERAMIC FLOOR, WALL & MOSAICS

FINISHES: MATTE | GLOSSY



Photo features Core Fundamentals Prime Vitality White 12 x 24 on the floor and Hexagon Mosaic on the shower floor

FLOOR TILE



VITALITY WHITE RL20




DYNAMIC BEIGE RL21




STAMINA GREY RL23

4 x 16 WALL TILE – FLAT



VITALITY WHITE RL20



DYNAMIC BEIGE RL21



STAMINA GREY RL23

4 x 16 WALL TILE – WAVE



VITALITY WHITE RL20




DYNAMIC BEIGE RL21




STAMINA GREY RL23


1.5" HEX MOSAIC – DOT-MOUNTED ON A 12 x 10 SHEET



VITALITY WHITE RL20




DYNAMIC BEIGE RL21



STAMINA GREY RL23

AVAILABLE TILE SIZES




FOR COMPLETE PRODUCT INFORMATION,
PLEASE VISIT WWW.DAL TILE/CORE-FUNDAMENTALS


CORE FUNDAMENTALS™ – PRIME


AVAILABLE SIZE & TRIM SHAPES


PRIME

PLEASE REFER TO CHART ON NEXT PAGE FOR AVAILABILITY BASED ON COLOR CODE


FLOOR	SIZES	THICKNESS
	18 x 36 Floor Tile (17-7/8" x 35-3/4") (45.40 cm x 90.80 cm)	5/16"


	18 x 18 Floor Tile (17-11/16" x 17-11/16") (45.01 cm x 45.01 cm)	5/16"
--	---	-------


	12 x 24 Floor Tile (11-13/16" x 23-11/16") (30.02 cm x 60.12 cm)	5/16"
--	---	-------


	12 x 12 Floor Tile (11-13/16" x 11-13/16") (30.02 cm x 30.02 cm)	5/16"
--	---	-------

WALL	SIZES	THICKNESS
------	-------	-----------


	10 x 14 Wall Tile (9-13/16" x 13-15/16") (24.99 cm x 35.40 cm)	3/8"
--	---	------


	4 x 16 Wall Tile (4" x 16") (10.17 cm x 40.68 cm)	5/16"
--	--	-------


	4 x 16 Wave Wall Tile (4" x 16") (10.17 cm x 40.68 cm)	3/8"
--	---	------


	4 x 12 Wall Tile (4-1/4" x 12-7/8") (10.88 cm x 32.76 cm)	5/16"
---	--	-------

MOSAICS	SIZES	THICKNESS
---------	-------	-----------

	2 x 4 Straight-joint Mosaic Dot-mounted (14" x 12" Sheet) (35.56 cm x 30.48 cm Sheet)	1/4"
--	--	------

	2 x 2 Mosaic Dot-mounted (12" x 24" Sheet) (30.48 cm x 60.96 cm Sheet)	1/4"
--	---	------

	1.5" Hex Mosaic Dot-mounted (12" x 12" Sheet) (30.48 cm x 30.48 cm Sheet)	1/4"
---	--	------

	1 x 3 Herringbone Mosaic Dot-mounted (12" x 12" Sheet) (30.48 cm x 30.48 cm Sheet)	1/4"
--	---	------

FLOOR TRIM

	P43F9	3 x 24 Floor Bullnose
---	--------------	-----------------------

	P43C9	3 x 12 Floor Bullnose
---	--------------	-----------------------

WALL TRIM

	S1/212J	12" Jolly
---	----------------	-----------

	S4310	3 x 10 Wall Bullnose
---	--------------	----------------------

	SN4310	3 x 3 Wall Bullnose Corner
---	---------------	----------------------------

CORE FUNDAMENTALS™ – PRIME

AVAILABLE SIZE & TRIM SHAPES

PRIME

			FLOOR						WALL							MOSAIC			
			FIELD TILE				BULLNOSE		FIELD TILE				BULLNOSE		QUARTER ROUND				
COLOR #	COLOR NAME	PAGE #	18 x 36	18 x 18	12 x 24	12 x 12	P43F9	P43C9	10 x 14	4 x 16	4 x 16 Wave	4 x 12	S4310 SN4310	S1/212J	A106 UC106	2 x 4 STRAIGHT-JOINT	2 x 2	1.5 HEXAGON	1 x 3 HERRINGBONE
1500	Rainier	19				●		●											
2011	Black	19				●		●											
BA30	White	19		●	●	●		●	●				●			●			
BA34	Charcoal	19		●	●	●		●	●				●			●			
EL30	White	20			●		●					●		●					●
EL31	Beige	20			●		●					●		●					●
EL32	Grey	20			●		●					●		●					●
KC01	White	21		●	●	●		●									●		
KC04	Grey	21		●	●	●		●									●		
RL20	Vitality White	22	●		●	●	●		●	●	●			●				●	
RL21	Dynamic Beige	22	●		●	●	●		●	●	●			●				●	
RL23	Stamina Grey	22	●		●	●	●		●	●	●			●				●	



Photo features Core Fundamentals Prime Grey 12 x 24 on the floor with Memoir Cosmo Grey on the fireplace

CORE FUNDAMENTALS™ – PRIME

APPLICATION SPECIFICATIONS

PRIME – BA30 | BA34 | KC01 | KC04

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓*
Wet & Level – Interior Floor	≥ 0.42	✓*
Shower Floors (Residential or Light Commercial)	≥ 0.42	✓**
Shower Floor – Linear drain	≥ 0.42	✓**
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓*
Pool Linings	N/A	✓**

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

* Wall tile not suitable for this application

** Mosaic tile only

INSTALLATION

Grout Joint Recommendation	Shade Variation
----------------------------	-----------------

Floor: 3/16" (Overlap should not exceed 33% when installing tile with a length 15" or greater in a staggered brick-joint pattern.)

Wall: 1/16"

Mosaic: 1/8"



PERFORMANCE CHARACTERISTICS

	ASTM#	Floor Result	Wall Result	Mosaic Result
Water Absorption	C373	< 7.0%	< 20.0%	< 3.0%
Breaking Strength	C648	> 250 lbs	120-230 lbs	> 250 lbs
Scratch Hardness	MOHS	7.0	4.0-6.0	7.0
Chemical Resistance	C650	Resistant	Resistant	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

1	Residential Bathrooms ③	All Residential / Light Commercial
2	All Residential Areas 4	All Residential / Commercial

PRIME – EL30 | EL31 | EL32

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓*
Wet & Level – Interior Floor	≥ 0.42	✓*
Shower Floors (Residential or Light Commercial)	≥ 0.42	✓**
Shower Floor – Linear drain	≥ 0.42	✓**
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓*
Pool Linings	N/A	✓**

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

* Wall tile not suitable for this application

** Mosaic tile only

INSTALLATION

Grout Joint Recommendation	Shade Variation
----------------------------	-----------------

Floor: 3/16" (Overlap should not exceed 33% when installing tile with a length 15" or greater in a staggered brick-joint pattern.)

Wall: 1/16" (When rectangular size is installed in a staggered brick-joint pattern, overlap should not exceed 33%)

Mosaic: 1/8"



PERFORMANCE CHARACTERISTICS

	ASTM#	Floor Result	Wall Result	Mosaic Result
Water Absorption	C373	< 7.0%	< 20.0%	< 3.0%
Breaking Strength	C648	> 250 lbs	120-230 lbs	> 250 lbs
Scratch Hardness	MOHS	8.0	4.0-6.0	7.0
Chemical Resistance	C650	Resistant	Resistant	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

1	Residential Bathrooms ③	All Residential / Light Commercial
2	All Residential Areas 4	All Residential / Commercial

CORE FUNDAMENTALS™ – PRIME

APPLICATION SPECIFICATIONS

PRIME – RL20 | RL21 | RL23

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓*
Wet & Level – Interior Floor	≥ 0.42	✓*
Shower Floors (Residential or Light Commercial)	≥ 0.42	✓**
Shower Floor – Linear drain	≥ 0.60	✓**
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓*
Pool Linings	N/A	✓**

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.


APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

* Wall tile not suitable for this application

** Mosaic tile only

INSTALLATION

Grout Joint Recommendation	Shade Variation
Floor: 3/16" (Overlap should not exceed 33% when installing tile with a length 15" or greater in a staggered brick-joint pattern.) Wall: 10 x 14: 1/16" 4 x 16: 1/16" (When rectangular size is installed in a staggered brick-joint pattern, overlap should not exceed 33%) Mosaic: 1/8"	 High (V3)

PERFORMANCE CHARACTERISTICS

	ASTM#	Floor Result	Wall Result	Mosaic Result
Water Absorption	C373	< 7.0%	< 20.0%	< 3.0%
Breaking Strength	C648	> 250 lbs	120-230 lbs	> 250 lbs
Scratch Hardness	MOHS	8.0	4.0-6.0	8.0
Chemical Resistance	C650	Resistant	Resistant	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance				
1	Residential Bathrooms	③	All Residential / Light Commercial	
2	All Residential Areas	4	All Residential / Commercial	

PRIME – 1500 | 2011

APPLICATIONS


	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

INSTALLATION

Grout Joint Recommendation	Shade Variation
3/16"	 Low (V1)

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 7.0%
Breaking Strength	C648	> 250 lbs
Scratch Hardness	MOHS	7.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance				
1	Residential Bathrooms	③	All Residential / Light Commercial	
2	All Residential Areas	4	All Residential / Commercial	



Photo features Core Fundamentals Choice Iron 12 x 12 on the floor.

