

4.5 mm | 12 Mil

ADVENTURO™

RIGID CLICK

PROSERIES™

LUXURY VINYL FLOORING

 daltile



SuperGuard™
REINFORCED SHIELD

UNICLIC®
PATENTED TECHNOLOGY

4.5 mm | 12 Mil

ADVENTURO™

RIGID CLICK

ADVENTURE AWAITS

Experience a premier luxury vinyl floor with the captivating wood tones available in Adventuro™. Unmatched in design and technology, this ultra durable, rigid core plank leads to a superior floor that clicks together with ease and speed.

Cascading in design, these wood looks provide high-graphic variation and texture alongside enhanced performance and quick Uniclic® locking installation. Excellent thermal insulation and superior sound attenuation are just a few of the perks of this high-performing product.

BRILLIANT DESIGN


- 6" x 48" wood look planks
- 12 adventurous colors
- Textured surface for realistic look and feel
- HD design with medium and high-variation
- Multi-layer SPC rigid core with Uniclic® Locking System
- Built-in solid IXPE underlayment pad that resists mold and mildew
- 4.5 mm Thickness

TOP-RANK DURABILITY

- SuperGuard™ Technology 12 Mil wear layer for heavy foot traffic
- 100% Waterproof
- 100% Virgin Vinyl
- 7 Year light commercial warranty
- 30 Year residential warranty

4.5 mm | 12 Mil
ADVENTURO™
RIGID CLICK

SIZES:



6 x 48 WOOD LOOK PLANKS



INTREPID AD39



TREKKER AD38




ARC AD35




MARINER AD41



WANDER AD37

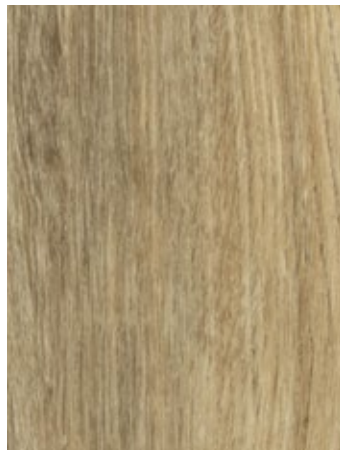

EXPLORER AD36

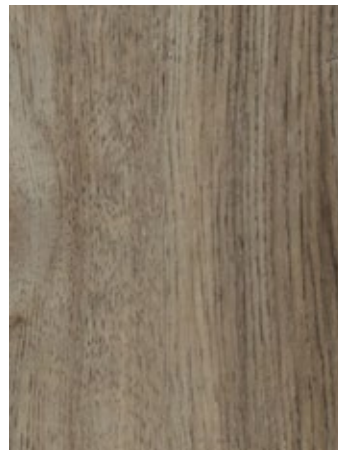

FOREST AD34




TRAVELER AD30



COMPASS AD33



VOYAGE AD31

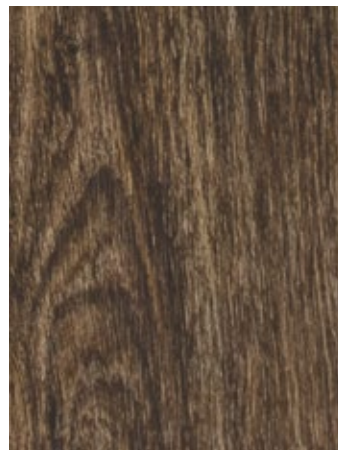

WILDE AD40



JOURNEY AD32

4.5 mm | 12 Mil

ADVENTURO™

RIGID CLICK

SPECIFICATIONS

Product Type:	SPC Rigid Core LVF
Installation:	Click
Thickness:	4.5 mm
Wear Layer:	12 Mil (0.3048 mm)
Finish:	SuperGuard™ Technology
Size:	6" W x 48" L Plank
Underlayment:	Pad Attached; 1.0 mm IXPE Closed Cell
Bevel:	Micro-Bevel
Plank Variation:	6 Unique Planks
Sq. Ft./Carton:	32.15
Pieces/Carton:	16
Weight	2.80 lbs per pc / 45.74 lbs per carton
Installation Advisory:	Adventuro™ click LVF uses Uniclic® Locking System; no adhesive required. See daltile.com/LVF for more recommended installation information.
Transitions:	Click LVF transitions are offered in a Vinyl 4-in-1 Transition & Vinyl Stair Nose. Can be installed with or without underlayment, when total installation is 8.0 mm or less. See daltile.com/LVF for more information.
Warranty:	Limited 7 Year Light Commercial Warranty Limited 30 Year Residential Warranty

PERFORMANCE & CHARACTERISTICS

Construction:	Commercial Grade Luxury Vinyl Flooring; 100% Virgin Vinyl
Classification:	ASTM F1700 - Class III, Type A - Smooth, Type B - Embossed
Squareness:	ASTM F2421 - Passes - ± 0.010 " max
Size and Tolerance:	ASTM F2421 - Passes - ± 0.016 in. / linear foot
Thickness:	ASTM F386 - Passes - ± 0.13 mm
Flexibility:	ASTM F137 - Passes - 1" mandrel
Dimensional Stability:	ASTM F2199 - Passes - $< 0.25\%$ / linear foot
Static Load Limit:	ASTM F970 - Passes, Test to Limit ($+0.005$ ")
Residual Indentation:	ASTM F1914 - Passes - Average $< 8.0\%$
Resistance To Chemicals:	ASTM F925 - Passes - ≤ 1 Slight Change
Resistance To Light:	ASTM F1515 - Passes - $\Delta E \leq 8$
Resistance To Heat:	ASTM F1514 - Passes - $\Delta E \leq 8$

NOTES

See daltile.com/LVF for recommended installation and care guidelines



7834 C.F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at daltile.com/LVF



©2021 Dal-Tile Corporation (4/21)