



WALL

**ANNAPOLIS™**  
GLAZED CERAMIC

 **daltile®**  
IMAGINE WHAT'S POSSIBLE™



Above and cover photos feature Sail Gloss Bevel 6 x 16 wall tile on the wall.

## Expand Horizons With In-Demand, Current Styling

This bigger and better cousin to classic subway tile gives any wall a retro sensibility with contemporary styling. Annapolis™ is subtle enough to work in any room but attracts attention with available detailed finishes like beveled edges and glossy or matte finishes. Pure white, simple beige, and versatile black color options give you design flexibility that range from transitional to contemporary styles. Expand your horizons with this reinterpreted favorite.

- **UPDATED CLASSIC**
  - Large format size in traditional colors is a spin on subway tile
  - Gently beveled edge adds texture and sophistication
- **VERSATILE DESIGN**
  - Three neutral colors in gloss and matte
  - Simple jolly trim for a holistic finish

GLOSS BEVEL\*



SAIL AP06



SAND AP07



BLACK AP09

GLOSS



SAIL AP06




SAND AP07




BLACK AP09

MATTE

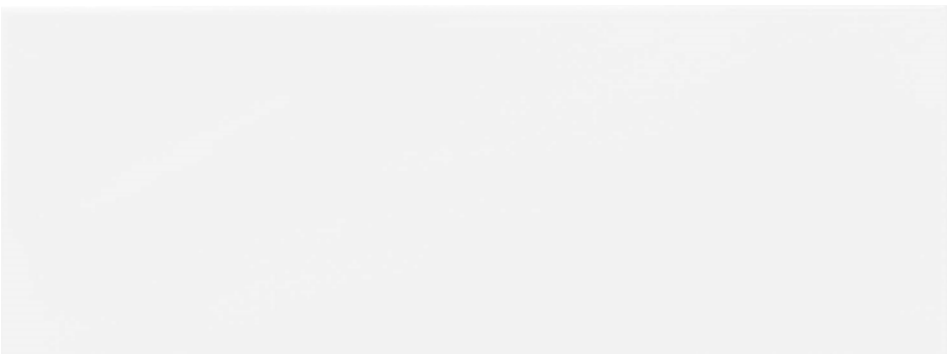

SAIL AP10

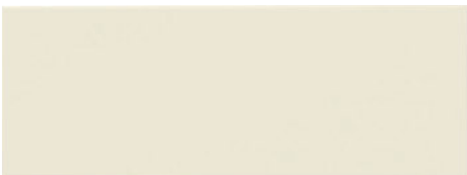

SAND AP11



BLACK AP12



\* Available in gloss finish only

WALL

# ANNAPOLIS™

GLAZED CERAMIC

## SIZES

			Thickness	Sq. Ft. per Carton	Pieces per Carton
	6 x 16 Wall Tile	(5-7/8" x 15-3/4") (15.00 cm x 40.00 cm)	5/16"	13.65	21
	6 x 16 Bevel Wall Tile*	(5-7/8" x 15-3/4") (15.00 cm x 40.00 cm)	3/8"	11.05	17

\* Available in gloss finish only

## APPLICATIONS

	Suitable
Floors	
Walls/Backsplashes	✓
Countertops	
Pool Linings	

### APPLICATION NOTES:


Wall tile has continuous lug.

Suitable for exterior wall applications in non-freezing climates only when proper installation methods are followed.

## TRIM

Type	Number	Size	Pieces per Carton
 12" Jolly	S-1/212J	1/2 x 11-15/16	12

## INSTALLATION

Grout Joint Recommendation	Shade Variation
1/16" (1/8" when rectangular size is installed in a staggered brick-joint pattern; overlap should not exceed 33%)	 Low (V1)

## TEST RESULTS

	ASTM#	Result
Water Absorption	C373	< 20.0%
Breaking Strength	C648	120-230 lbs.
Scratch Hardness	MOHS	4.0-6.0
Chemical Resistance	C650	Resistant

## NOTES

Since there are variations in all fired ceramic products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

For additional information refer to "Factors to Consider" at [daltile.com/Factors](http://daltile.com/Factors).



DESIGNED TO HELP EARN LEED™ CREDITS. For more detailed information, visit [daltilegreenworks.com](http://daltilegreenworks.com).



SCAN QR CODE FOR PRODUCT INFORMATION

Get a QR Code reader at: [GET.DAL TILE.COM](http://GET.DAL TILE.COM)



7834 C. F. Hawn Freeway, Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at [daltile.com](http://daltile.com).



IMAGINE WHAT'S POSSIBLE™

©2016 Dal-Tile Corporation (5/16)