



DECORATIVE

CAPRICE™

GLASS MOSAICS

 **daltile®**
IMAGINE WHAT'S POSSIBLE™



Cover and above photos feature Caprice™ Vanilla Blend 5/8 x random interlocking mosaic on the wall.

Playfully Lavish

This linear glass tile isn't your run-of-the-mill accent tile. It commands attention with a spirited flair. Use it to create a trend-forward accent wall or oversized kitchen backsplash. It's at home acting simply as an accent to larger, more traditional tile or can hold its own used more liberally. Wake up your design with the color and pencil-thin delicacy of Caprice.


- MORE THAN AN ACCENT
 - Glass linear tile can stand alone on a wall or add flair as an accent
 - Four neutral colors and four playful color blends that complement any design
 - Adds 3-dimensional texture
- EASY MAINTENANCE
 - Simple to keep clean, treat as you would any glass
 - No fade color keeps your design vibrant

GLOSSY AND FROSTED INTERLOCKING GLASS


SOLIDS



ICE WHITE F167

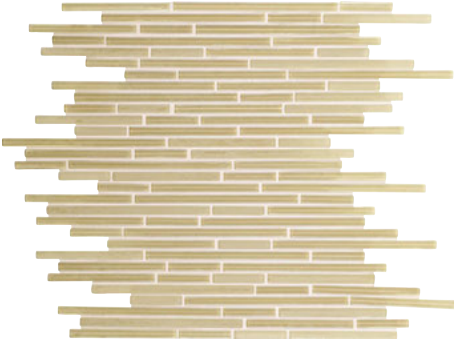

CREME SODA F168

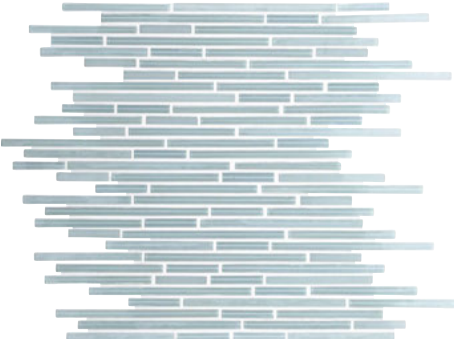

WHISPER GREEN F165



KINETIC KHAKE F166

BLENDS



VANILLA BLEND F170



MINK BLEND F171



CRIMSON BLEND F172




CONTRAST BLEND F169

CAPRICE™

GLASS MOSAICS

SIZES

	Thickness	Sq. Ft. per Carton	Pieces per Carton
 5/16 x Random Interlocking Mosaic (Mesh-mounted) (12-3/4" x 11-11/16" Sheet) (32.40 cm x 29.70 cm Sheet)	5/16"	9.60	10

*Tile is available by special order.

APPLICATIONS


	Suitable
Floors	
Walls/Backsplashes	✓
Countertops	
Pool Linings	

APPLICATION NOTES:

Suitable for exterior applications in freezing and non-freezing climates when proper installation methods are followed.

Suitable for use in wet areas such as shower walls.

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8" Approximately	 Random (V4)

TEST RESULTS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 100 lbs
Scratch Hardness	MOHS	4.0
Chemical Resistance	C650	Resistant

NOTES

Since there are variations in all fired glass products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile samples or color reproductions. Manufactured in accordance with ANSI A137.2 standards.

For additional information refer to "Factors to Consider" at daltile.com/Factors.



DESIGNED TO HELP EARN LEED™ CREDITS. For more detailed information, visit daltilegreenworks.com.



SCAN QR CODE FOR PRODUCT INFORMATION

Get a QR Code reader at: GET.DALTILE.COM



7834 C. F. Hawn Freeway, Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at daltile.com.



IMAGINE WHAT'S POSSIBLE™

©2016 Daltile (12/16)