



MOSAIC LOOK

COASTAL KEYSTONES™

COLORBODY™ PORCELAIN MOSAIC with OCEANSIDE GLASSTILE®

 **daltile**[®]
IMAGINE WHAT'S POSSIBLE™

COASTAL KEYSTONES™

COLORBODY™ PORCELAIN MOSAIC with OCEANSIDE GLASSTILE®

Escape with Coastal Keystones

Head for the shoreline and sail away with the Coastal Keystones collection. Transform a bathtub into a cruise ship and be motivated by this modern and luxurious mosaic tile that lets you escape. In a magnificent range of sizes and hues, the glass and mosaic blends of tile add sophistication and a worldly feel to virtually any space indoor or out.

- **VERSATILE LUXURY**
 - Sophisticated blend of glass and tile
 - Suitable for exteriors, interiors, pools, flooring, walls, countertops and beyond
- **SEA OF DESIGN OPTIONS**
 - 3 blends available in 4 different patterns
 - Create unique designs by mixing patterns



Cover and above photos feature Coastal Keystones™ Mediterranean Mist Blend 1" hexagon mosaic on the wall.

MOSAIC LOOK

USAGE

- FLOOR
- WALL
- COUNTERTOP
- SHOWER FLOOR
- EXTERIOR FLOOR

SPECIAL FEATURES

- STEPWISE™
- TRU-EDGE™
- MADE IN THE U.S.A.
- LARGE FORMAT
- MOSAIC/DECO
- ENCAUSTIC
- TERRAZZO
- PAVER
- CUSTOMIZE
- FLEXFIT™

G GLASS

LOW HIGH

SEE CHARTS FOR FULL PRODUCT DETAILS

COASTAL KEYSTONES™

COLORBODY™ PORCELAIN MOSAIC with OCEANSIDE GLASSTILE®

SIZES:



1 x 1
Mosaic



1" Hexagon
Mosaic



2 x 1 Brick-joint
Mosaic




1 x 1, 2 x 1 and 2 x 2
Block Random

FINISHES: MATTE | GLOSSY

1" HEXAGON MOSAIC



TRADE WIND BLEND CK86
(25% ARCTIC WHITE D617, 25% URBAN
PUTTY D161, 25% CLEAR IRIDESCENT
GLASS & 25% CLEAR
MATTE GLASS)

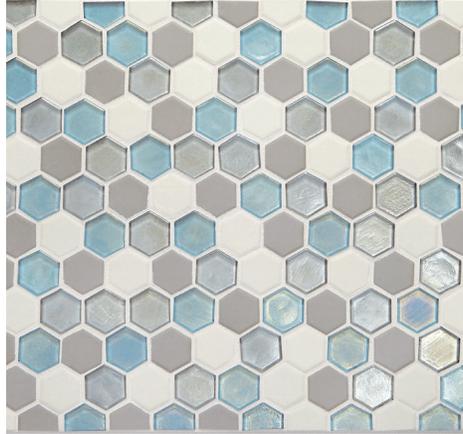

MEDITERRANEAN MIST BLEND CK92
(25% ARCTIC WHITE D617, 25% DESERT
GRAY D014, 25% PACIFIC BLUE
IRIDESCENT GLASS &
25% SILVERLIGHT IRIDESCENT GLASS)



TROPICAL THUNDER BLEND CK88
(25% BLACK D311, 25% DESERT GREY
D014,
25% OXYGEN IRIDESCENT GLASS & 25%
FLEET
BLUE IRIDESCENT GLASS)



SLIP RESISTANT



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT



FIRE-RESISTANT



CLIMATEPRO™



SIMPLICLEAN™

VISIT THE WHY TILE PAGE AT WWW.DAL TILE.COM FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

COASTAL KEYSTONES™

COLORBODY™ PORCELAIN MOSAIC with OCEANSIDE GLASSTILE®

MOSAIC LOOK

BLOCK RANDOM MOSAIC*



TRADE WIND
BLEND CK86



MEDITERRANEAN
MIST BLEND CK92




TROPICAL THUNDER
BLEND CK88

1 x 1 MOSAIC



TRADE WIND
BLEND CK86



MEDITERRANEAN
MIST BLEND CK92



TROPICAL THUNDER
BLEND CK88

2 x 1 BRICK-JOINT MOSAIC



TRADE WIND
BLEND CK86



MEDITERRANEAN
MIST BLEND CK92



TROPICAL THUNDER
BLEND CK88

* Sheet can be cut into (3) 4 x 12 borders.

SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	1 x 1 Mosaic (Paper-face mounted)	(12" x 12" Sheet) (30.48 cm x 30.48 cm Sheet)	1/4"	15.00	15
	1" Hexagon Mosaic (Paper-face mounted)	(12" x 12" Sheet) (30.48 cm x 30.48 cm Sheet)	1/4"	15.00	15
	2 x 1 Brick-joint Mosaic (Paper-face mounted)	(12" x 13" Sheet) (30.48 cm x 33.02 cm Sheet)	1/4"	15.00	15
	1 x 1, 2 x 1 and 2 x 2 Block Random* (Paper-face mounted)	(12" x 12" Sheet) (30.48 cm x 30.48 cm Sheet)	1/4"	15.00	15

* Sheet can be cut into three 4 x 12 borders.

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓
Shower Floors (Residential or Light Commercial)	≥ 0.42	✓
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓*
Pool Linings	N/A	✓
Poll Tank/Submerged	N/A	✓

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior wall applications in freezing and non-freezing climates when proper installation methods are followed.

*Residential and light commercial countertops only.

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/16"	 Random (V4)

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 350 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

1 Residential Bathrooms	③ All Residential / Light Commercial
2 All Residential Areas	4 All Residential / Commercial

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

Random visuals enhance the natural beauty of this product. To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.



All or select items within this series meet the requirements for these qualifications. For more information, visit daltile.com.



7834 C.F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at daltile.com.

