



WALL

CONFECTIONERY™

GLAZED CERAMIC WALL

 **daltile**®
IMAGINE WHAT'S POSSIBLE™



Cover photo features Confectionery™ Crushed Berry, Birthday Cake & Wintergreen on the wall. Above photo features Confectionery™ Licorice on the wall.

A Delectable Treat

Indulge your senses into the monochromatic look of Confectionery™. This decadent assortment will tickle your taste buds with its retro design. From stripes and arrows to diamonds and chevron, the patterns you can customize are limitless. Enjoy sweet style with this charming, mid-century modern collection.

- DELIGHTFUL DESIGN
 - Decorated with a striped triangle using Reveal Imaging® Technology that creates a tone-on-tone look with matte and satin finishes
 - Six retro-inspired colors and three neutrals in white, beige and black
- BEAUTIFULLY CURATED
 - 6 x 6 wall tile and 12 inch jolly with a coordinating monochromatic color in a matte finish
 - A mid-century modern look manufactured in the USA



POST-CONSUMER RECYCLED MATERIALS



PRE-CONSUMER RECYCLED MATERIALS



MADE IN THE U.S.A.



VISUAL IMAGING™

All or select items within this series meet the requirements for these qualifications. For more information visit daltile.com.

USAGE

Floors

Walls

Countertops



W



WALL TILE



BIRTHDAY CAKE CY20



SALTED CARAMEL CY21




LICORICE CY22




LEMON DROP CY23




WINTERGREEN CY24

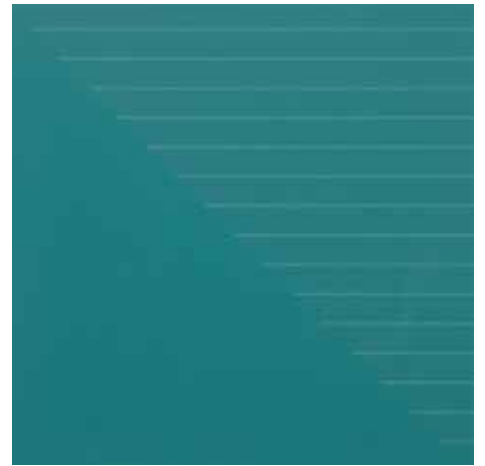

GUM DROP CY25

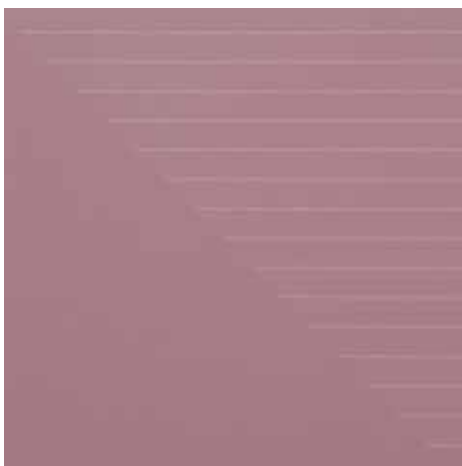

PIXIE STICK CY26

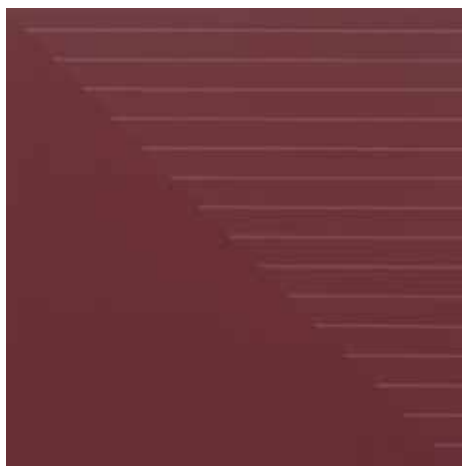

CRUSHED BERRY CY27




BLUEBERRY COBBLER CY28

WALL


CONFECTIONERY™

GLAZED CERAMIC


PATTERNS

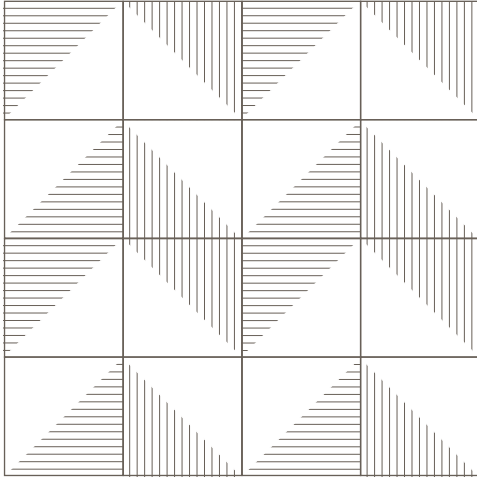


CHEVRON

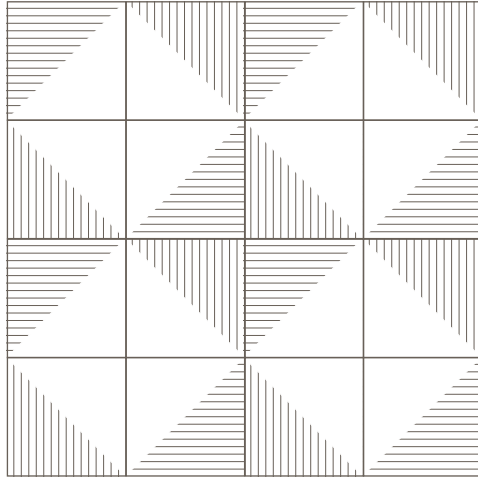


DIAMOND

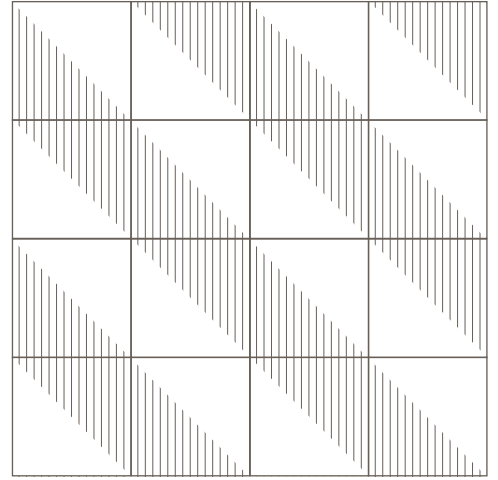


STRIPES

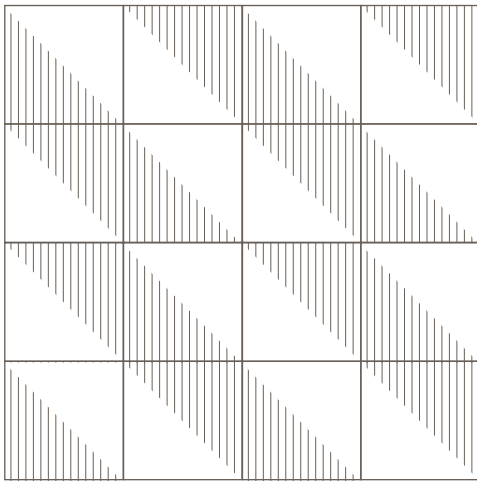

MISALIGNED STRIPES

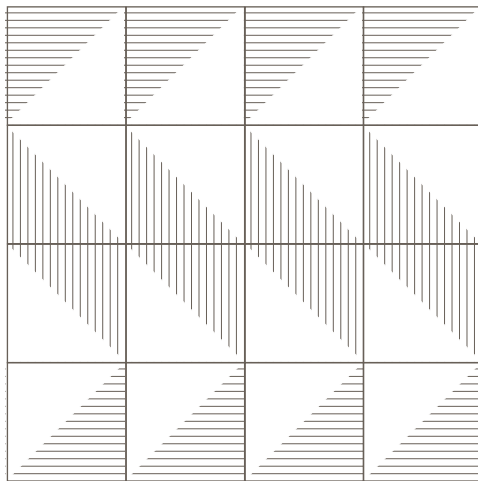


ARROW

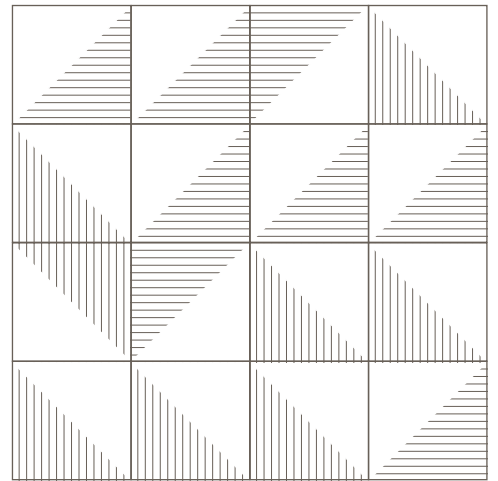

RANDOM

SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	6 x 6 Wall Tile	(6" x 6") (15.31 cm x 15.31 cm)	5/16"	12.50	50

APPLICATIONS


	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	
Pool Linings	N/A	✓

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.


APPLICATION NOTES:

Suitable for exterior applications in non-freezing climates, when proper installation methods are followed.

TRIM

Type	Number	Size	Pieces per Carton
 Jolly	S1/212J	1/2 x 12	12

INSTALLATION

Grout Joint Recommendation	Shade Variation
Wall: 1/16"	 Low (V1)

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 20.0%
Breaking Strength	C648	120-230 lbs
Scratch Hardness	MOHS	4.0 - 6.0
Chemical Resistance	C650	Resistant
Abrasion Resistance	C1027	N/A

For additional information on test results, visit us at: daltile.com/information/TestResults.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.



DESIGNED TO HELP EARN LEED™
 CREDITS. For more detailed information,
 visit daltilegreenworks.com.

7834 C.F. Hawn Freeway,
 Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of
 Daltile® products and information,
 visit our website at daltile.com.



IMAGINE WHAT'S POSSIBLE™

©2019 Daltile (1/19)