

SLAB

USAGE



FLOOR



WALL



COUNTERTOP



SHOWER FLOOR



EXTERIOR FLOOR



STEPWISE™



TRU-EDGE™



MADE IN THE U.S.A.



LARGE FORMAT



MOSAIC/DECO



ENCAUSTIC



TERRAZZO



PAVER



CUSTOMIZE



FLEXFIT™




PORCELAIN



SEE CHARTS FOR FULL PRODUCT DETAILS

* RESIDENTIAL USE ONLY

SPECIAL FEATURES

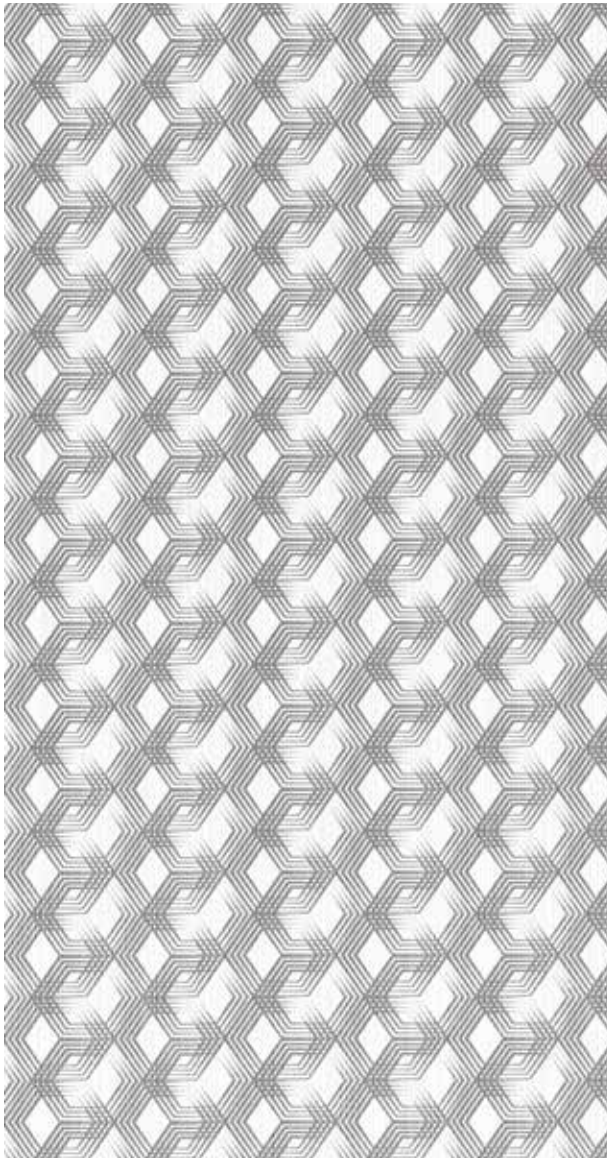


PATCHWORK SILVER CM30 - MATTE










PATCHWORK BLACK CM31 - GLOSSY

SIZES

| Nominal Size | Actual Size | Thickness | Sq. Ft./ Slab |
|--|--------------------|-------------|---------------|
|  63" x 126" Slab | 62-7/8" x 125-3/4" | 1/4" (6 mm) | 55.00 |

FLEXFIT™ SIZE SOLUTIONS

| Standard Stocked Sizes* | Actual Size | Thickness |
|--|-------------------|-----------|
|  63" x 63" | 62" x 62" | 6 mm |
|  31.50" x 126" | 31" x 124" | 6 mm |
|  31.50" x 63" | 31" x 62" | 6 mm |
|  15.75" x 63" | 15-1/2" x 62" | 6 mm |
|  31.50" x 31.50" | 31" x 31" | 6 mm |
|  15.75" x 31.50" | 15-1/2" x 31" | 6 mm |
|  21" x 21" | 20-1/2" x 20-1/2" | 6 mm |

PLUS – DREAM IT, DESIGN IT, WE CAN DO IT!

WITH OUR CUSTOM CUT TO SIZE PROGRAM

Request your quick quote: customquote@daltile.com

* Please allow 1-2 weeks for processing & shipping FlexFit™ standard sizes.

* 12mm available for Calacatta Aries, Gypsum Calacatta, Diamond Mine, Moonstone, Statuario, Calacatta, Marfil, Manor White, Calacatta Topaz and Jasper Grey only.

APPLICATIONS

| | Target DCOF wet | Suitable |
|--|-----------------|----------|
| Dry & Level – Interior Floor (Residential) | N/A | ✓* |
| Wet & Level – Interior Floor (Residential) | ≥ 0.42 | ✓* |
| Shower Floors (Residential or Light Commercial) | ≥ 0.42 | |
| Exterior Floor Applications (including pool decking & other wet areas with minimal footwear) | ≥ 0.60 | |
| Ramps & Inclines | ≥ 0.65 | |
| Walls/Backsplashes | N/A | ✓ |
| Countertops | N/A | ✓* |
| Pool Linings | N/A | |



A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications in freezing and non-freezing climates, when proper installation methods are followed.

* Only available on specified SKUs.

INSTALLATION

| Grout Joint Recommendation | Shade Variation |
|----------------------------|--|
| 1/8" |  Medium (V2): Industrial Selection Metallic Selection  High (V3): Elemental Selection Couture Selection |

NOTES

Special consideration must be given when installing tiles greater than 15 inches. Please refer to ANSI A108.19 standards for Gauged Porcelain Slabs for more information.

Use of an LFT (Large Format Tile) mortar is required. Thin-set mortars are not suitable for Panoramic Porcelain Surfaces.

Since there are variations in all fired ceramic products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual panels and trim and not from product samples or color reproductions.

Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.

WARNING: This product can expose you to chemicals known to the State of California to cause cancer, including crystalline Silica (airborne particles of respirable size) in dust created if the product is dry cut/ground/polished or pulverized during fabrication/installation/removal. For more information, go to www.P65Warnings.ca.gov.

For additional information refer to "Factors to Consider" at daltile.com/Factors.