

2.5 mm | 20 mil
ELIXEN™
GLUE DOWN

PROSERIES™
LUXURY VINYL FLOORING
daltile




SuperGuardX™
REINFORCED SHIELD


**MADE IN
THE U.S.A.**

SIZES:



7 x 47
Plank

7 x 47 WOOD LOOK PLANKS



SONOMA OAK EX30




WHITE OAK EX31



VINTAGE PINE EX32




ASHWOOD EX33

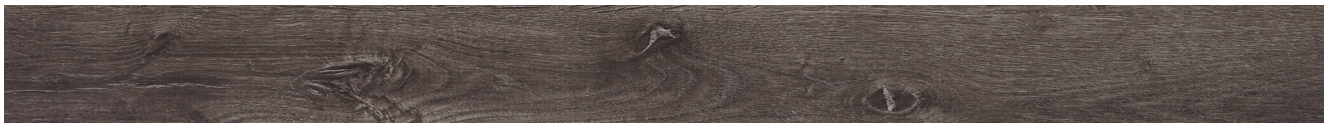

DRIFTWOOD EX34



EXOTIC TEAK EX35

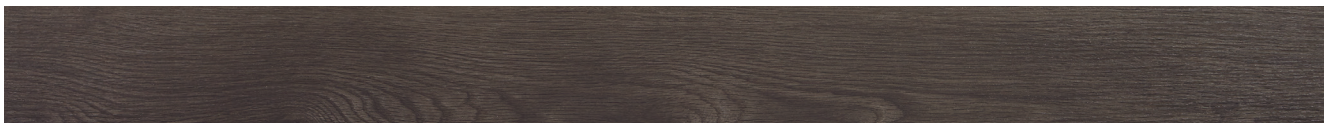

BLACK WALNUT EX36



RUSTIC JAVA EX37



ROSEWOOD EX38

2.5 mm | 20 mil
ELIXEN™
GLUE DOWN



NOISE **REDUCING**



EASY TO CLEAN



100% WATERPROOF



100% VIRGIN VINYL

DESIGN & SIZE

Product Type:	Glue Down LVF
Installation:	Glue Down
Thickness:	2.5 mm
Wear Layer:	20 mil (0.508 mm)
Finish:	SuperGuardX™ Technology
Size:	7" W x 47" L Plank
Underlayment:	N/A
Bevel:	No Bevel
Embossing:	Embossed
Plank Variation:	6 Unique Planks
Sq. Ft./Carton:	34.88
Pieces/Carton:	15
Weight:	1.94 lbs per piece 30.2 lbs per carton
Installation & Adhesive:	Glue down and install using ProSeries by Daltile Adhesive; see daltile.com/LVF for more recommended installation and adhesive information

SERVICE

Warranty:	Limited Lifetime Residential Warranty Limited 15 Year Multifamily Unit Warranty Limited 15 Year Light Commercial Warranty Limited 15 Year Commercial Warranty
-----------	--

PERFORMANCE & CHARACTERISTICS

Construction:	Commercial Grade Luxury Vinyl Flooring; 100% Virgin
Classification:	ASTM F1700 - Class III, Type A - Smooth, Type B - Embossed
Squareness:	ASTM F2421 - Passes - ± 0.010 " max
Size and Tolerance:	ASTM F2421 - Passes - ± 0.016 in. / linear foot
Thickness:	ASTM F386 - Passes - as specified ± 0.005 in
Flexibility:	ASTM F137 - Passes - 1" mandrel
Dimensional Stability:	ASTM F2199 - Passes - 0.020 in. / linear foot max
Static Load Limit:	ASTM F970 - Passes, modified at 1000 psi
Residual Indentation:	ASTM F1914 - Passes - Average less than 8% maximum single reading 10%
Resistance To Chemicals:	ASTM F925 - Passes - No more than a slight change
Resistance To Light:	ASTM F1515 - Passes - $\Delta E \leq 8$
Resistance To Heat:	ASTM F1514 - Passes - $\Delta E \leq 8$
Critical Radiant Flux:	ASTM E648 - Passes - Class 1 (> 0.45 W/cm ²)
Smoke Density:	ASTM E662 Part A - Passes - < 450



7834 C.F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of
Daltile® products and information,
visit our website at daltile.com/LVF

PROSERIES™
LUXURY VINYL FLOORING
daltile

©2023 Dal-Tile, LLC (8/23)