



METALLIC LOOK

IRONCRAFT™
COLORBODY™ PORCELAIN

IRONCRAFT™

COLORBODY™ PORCELAIN

Historic Strength Redefined

Walking through old factories and warehouses, one is reminded of centuries past – an era of the rugged, industrial artisan. Ironcraft™ owes its roots to the American craftsman who inspired this collection. This porcelain tile resembles bare concrete, brushed and burnished with oxidized metals. Ironcraft is the perfect surface for lofts, studios and chic industrial spaces.

METALLIC LOOK

USAGE



FLOOR



WALL



COUNTERTOP



SHOWER FLOOR



EXTERIOR FLOOR



STEPWISE™



TRU-EDGE™



MADE IN THE U.S.A.



LARGE FORMAT



MOSAIC/DECO



ENCAUSTIC



TERRAZZO



PAVER



CUSTOMIZE



FLEXFIT™



P.C.



LOW HIGH

SPECIAL FEATURES



Cover photo features Ironcraft™ Charcoal Grey matte 12 x 24 on the floor and Ironcraft™ Charcoal Grey light polished 12 x 24 on the wall. Above photo features Ironcraft™ Charcoal Grey light polished 12 x 24 on the floor.

SIZES:



FINISHES: MATTE | LIGHT POLISHED

COLOR PALETTE



PHOSPHOR WHITE



CASPER GREY




CHARCOAL GREY



SABLE BLACK

COLORBODY™ PORCELAIN FLOOR TILE

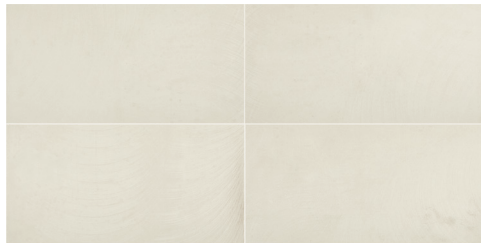

PHOSPHOR WHITE IC11



CASPER GREY IC12



CHARCOAL GREY IC13




SABLE BLACK IC15

2 x 2 MOSAIC (MATTE ONLY)




PHOSPHOR WHITE IC11



CASPER GREY IC12



CHARCOAL GREY IC13



SABLE BLACK IC15

RANDOM INTERLOCKING MOSAIC*



PHOSPHOR GREY BLEND IC16



GREY BLACK BLEND IC17

* Available in unique color blends only with a random mix of light polished and matte pieces.
Visit daltille.com/ironcraft for more information.



SLIP RESISTANT



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT*
*Applicable to products with Matte and Textured Finishes



FIRE-RESISTANT*
*Not Applicable to Mesh-Mounted Mosaics






CLIMATEPRO™



SIMPLICLEAN™

VISIT THE WHY TILE PAGE AT WWW.DALTILE.COM FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	12 x 24 Floor Tile	(11-5/8" x 23-3/8") (29.56 cm x 59.44 cm)	5/16"	17.02	9
	2 x 2 Mosaic* (Mesh-mounted)	(12" x 12" Sheet) (30.48 cm x 30.48 cm Sheet)	5/16"	10.00	10
	Random ■ Interlocking Mosaic (Mesh-mounted)	(15" x 12" Sheet) (38.10 cm x 30.48 cm Sheet)	5/16"	7.00	7

- * Available in Matte finish only.
- Available in unique color blends only with a random mix of light polished and matte pieces. Visit daltille.com/Ironcraft for more information.

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓*
Shower Floors - Standard Center Drain (Residential or Light Commercial)	≥ 0.42	✓**
Shower Floors - Linear Drain	≥ 0.60	✓**
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	✓**

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltille.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

- * Matte finish only.
- ** 2 x 2 mosaic tile only.



PRE-CONSUMER
RECYCLED MATERIALS






MADE IN THE U.S.A.



REVEAL IMAGING®


All or select items within this series meet the requirements for these qualifications. For more information, visit daltille.com.

TRIM

	Type	Number	Size	Pieces/ Carton
	Bullnose*	P43C9	3 x 12	30
	Cove Base*	P36C9	6 x 12	22
	Cove Base Outcorner*	PC36C9	1 x 6	15

- * Available in Matte finish only.
- Cove base trim is intended to coordinate with floor tile in the standard 90-degree installation position.

INSTALLATION

Grout Joint Recommendation	Shade Variation
Floor: 1/8" (3/16" when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%).	 Random (V4)
Mosaic: 1/8"	

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: daltille.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

1	Residential Bathrooms	3	All Residential / Light Commercial
2	All Residential Areas	④	All Residential / Commercial

NOTES

- Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.
- Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.
- For additional information refer to "Factors to Consider" at: daltille.com/Factors.
- Random visuals enhance the natural beauty of this product. To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.
- Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltille.com/LargeTiles for more information.
- Manufacturer Advisory: All tile is measured by the DCOF AcuTest™ method. Tiles with DCOF values <0.42 are not recommended for use in areas with wet or slippery conditions. For more information, see ANSI standard A137.1 section 6.2.2.1.10, available at www.tileusa.com.
- Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.