




CONCRETE LOOK

MUSEO™  
COLORBODY™ PORCELAIN

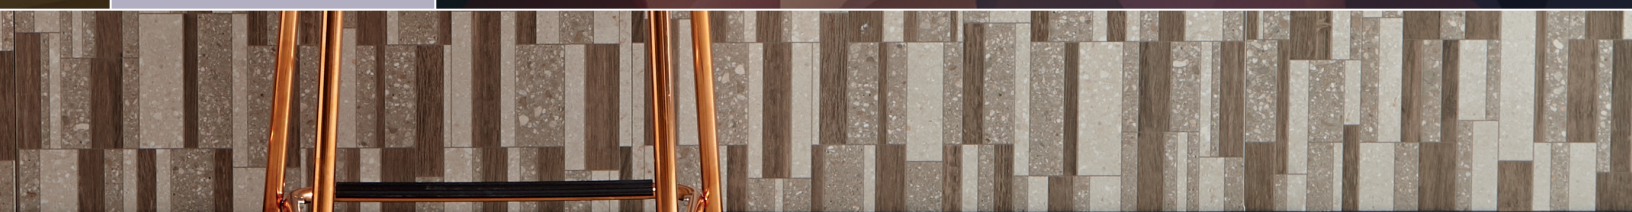

 daltile®  
IMAGINE WHAT'S POSSIBLE™



MUSEO™  
COLORBODY™ PORCELAIN

## A Work of Art

Museo™ is a true masterpiece fit for sophistication and grandeur. This artistic collection is inspired by the raw, natural look of concrete and terrazzo subtly paired with the simple elegance of timber. Available in large-format sizes. Museo is meant to be showcased on a grand scale.

### CONCRETE LOOK

### USAGE



FLOOR



WALL



COUNTERTOP



SHOWER  
FLOOR



EXTERIOR  
FLOOR



STEPWISE™



TRU-EDGE™



MADE IN  
THE U.S.A.



LARGE  
FORMAT



MOSAIC/  
DECO



ENCAUSTIC



TERRAZZO



PAVER



CUSTOMIZE



FLEXFIT™



PC  
COLORBODY  
PORCELAIN

LOW HIGH

SEE CHARTS FOR FULL  
PRODUCT DETAILS

### SPECIAL FEATURES




Cover photo features Museo™ Natural Grey 12 x 24 on the floor, Block Grey Mix 12 x 24 on bar wall and Aviano™ Trentino Greige 10 x 14 on the back wall. Above photo features Museo™ Exhibition White 12 x 24 and Interwoven Trellis 24 x 24 on the floor.



SIZES:



24 x 48  
Floor Tile



24 x 24  
Floor Tile



12 x 24  
Floor Tile

FINISHES: MATTE

FLOOR TILE



EXHIBITION WHITE MU30




ARTISTIC GREY MU31



NATURAL GREY MU32

24 x 24 INTERWOVEN TRELLIS

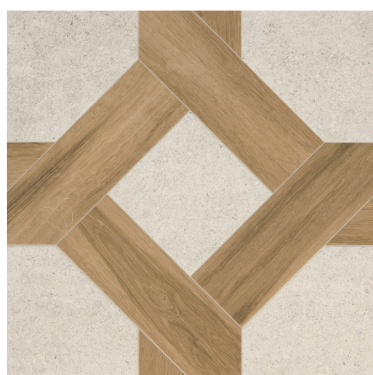

EXHIBITION WHITE  
TRELLIS MU33




ARTISTIC GREY  
TRELLIS MU34



NATURAL GREY  
TRELLIS MU35

12 x 24 BLOCK

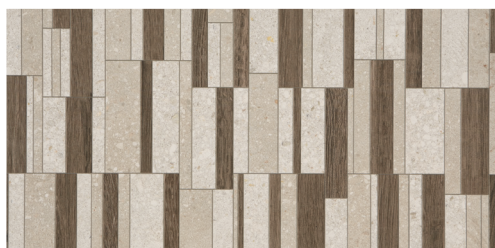

BLOCK WHITE MIX MU36



BLOCK GREY MIX MU37



SLIP RESISTANT



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT\*



FIRE-RESISTANT






CLIMATEPRO™



SIMPLICLEAN™

SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	24 x 48 Floor Tile	(23-3/8" x 46-15/16") (59.44 cm x 119.20 cm)	5/16"	15.26	2
	24 x 24 Floor Tile / Interwoven Trellis	(23-3/8" x 23-3/8") (59.44 cm x 59.44 cm)	5/16"	15.20	4
	12 x 24 Floor Tile / Block	(11-5/8" x 23-3/8") (29.56 cm x 59.44 cm)	5/16"	17.02	9

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓
Shower Floors - Standard Center Drain (Residential or Light Commercial)	≥ 0.42	
Shower Floors - Linear Drain	≥ 0.60	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit [daltille.com/DCOF](https://daltille.com/DCOF).

APPLICATION NOTES:




Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant


For additional information on test results, visit us at: [daltille.com/information/TestResults](https://daltille.com/information/TestResults).

TRIM

Type	Number	Size	Pieces/ Carton
 Bullnose	P43F9	3 x 24	10
 Cove Base	P36C9	6 x 12	22
 Cove Base Outcorner	PC36C9	1 x 6	15

Cove base trim is intended to coordinate with floor tile in the standard 90-degree installation position.

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8" (3/16" when multiple sizes are installed in a modular pattern, and/or when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.)	 High (V3)

DURABILITY

Floor Surface Wear Resistance			
1	Residential Bathrooms	3	All Residential / Light Commercial
2	All Residential Areas	④	All Residential / Commercial

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: [daltille.com/Factors](https://daltille.com/Factors).

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to [daltille.com/LargeTiles](https://daltille.com/LargeTiles) for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

 **MADE IN THE U.S.A.**

 **PRE-CONSUMER  
RECYCLED MATERIALS**

 **REVEAL IMAGING®**

All or select items within this series meet the requirements for these qualifications. For more information, visit [daltille.com](https://daltille.com).