





















A daltile<sup>®</sup>

# RESERV

Only the FINEST QUALITY and most exceptional design lend their attributes to the AMERICAN RESERVE. The epitome of REVOLUTIONARY TECHNOLOGY and innovative style, every unique detail is carefully crafted for SUPERIORITY.

# **FEATURED BENEFITS**



# STATE OF THE ART DESIGN & STYLE

- Exclusive Colors & Designs
- Proprietary Design Technologies
- Most Advanced Decorative Capability
- Highest Gloss & Clarity



# UNPARALLELED PERFORMANCE

- · Our Products are the most Heat, Scratch & Stain Resistant in the Market
- · Maintenance Free
- Food Safe



# LARGEST SLABS IN THE WORLD

- More Flexibility with Less Waste
- Less Seams for Today's Large Islands



# BEING AMERICAN MATTERS\*

MANUFACTURING & SERVICE

Service Nationwide

• Quality Control Center

**ENVIRONMENTALLY FRIENDLY** 

· Largest Footprint of Distribution &

• State of the Art Warehousing System

· Water Recycled used in Manufacturing

For A Healthy Space & Peace of Mind

· Nonporous, and Non-Absorbent

• Immediate Availability with Fast Response

• People care not only about where the products are made, but also how they are made




# RESIDENTIAL LIFETIME WARRANTY

· Offering a Lifetime of Confidence



# COMMERCIAL 25 YEAR WARRANTY

· Strongest Warranties in the Industry



				RESIS	STANCE				
	PRICE	STYLE	CHIPS	HEAT	STAIN	SCRATCHES	SEALING REQUIRED	MAINTENANCE	PROS
ONE QUARTZ SURFACES®	sss						NO	NO	Highly stain resistant Excellent for undermount sinks Engineered, so has consistent look Tons of colors to choose from

··· EXCELLENT
·· GOOD
· FAIR

SLAB









































Some of the most renowned landmarks across the nation tell the story of America's proud past, while symbolizing a strong and powerful future. With the Historic Series, establish historical significance and create unforgettable memories by incorporating revolutionary design in your space. Feel proud of the land you love, with products from the red, white and blue.







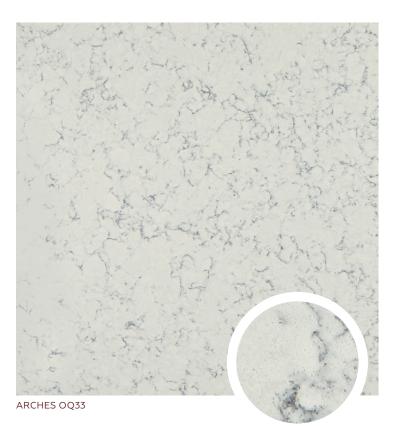









## PRODUCT INFORMATION

Finish	Actual Size	Thickness
Polished	135-7/8" x 78-3/4" (345 cm x 200 cm)	1-1/4" (3 cm) & 3/4" (2 cm)

Custom slab finishes in honed and leather are available by special order.

Not all colors available in alternative finishes. Please contact your local slab center for availability.

Thinner slabs available upon request. Please contact your local slab center to confirm sizes and availability.

# **APPLICATIONS**

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	<b>✓</b>
Countertops	N/A	✓
Pool Linings	N/A	

ONE Quartz Surfaces do not meet minimum coefficient of friction thresholds recommended by safety standard-setting organizations. Water, oil, grease, etc., create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection.

## APPLICATION NOTES:

Historic Series and National Marble Series not suitable for exterior applications due to small resin content. The sun will etch the material.



Twenty Five Year Commercial Limited Warranty, visit daltile. com for complete warranty details.



Lifetime Residential Limited Warranty, visit daltile.com for complete warranty details.



MADE IN THE USA WITH IMPORTED MATERIAL.



To See Approved Colors, Please Check The Below Link:

info.nsf.org/Certified/Food/ Listings.asp?Company=C053 6133&Standard=051

#### INSTALLATION

Grout Joint Recommendation	Shade Variation
1/16"	Medium (V2)

## **NOTES**

ONE Quartz Surfaces products are nonporous, reducing the potential for bacteria growth, resist common food stains and are stronger than natural granite.

ONE Quartz Surfaces products are virtually maintenance free.

ONE Quartz Surfaces products contain natural quartz stone providing consistent color and visual movement. A wide range of color options allow for more design freedom.

ONE Quartz Surfaces products have a durable, scratch-resistant surface.

ONE Quartz Surfaces products are heat and scorch-resistant under normal cooking conditions (use of a trivet is recommended for longer or extreme heat exposure).

 $\label{thm:com/countertops-product-category/one-quartz} In the conformal polished, honed and leather finish details.$ 

Twenty-Five year limited warranty. Visit daltile.com/ONEQuartz for details

White thin-set or mortar is recommended for the lighter colors of  $\mbox{\sf ONE}$  Quartz Surfaces tiles.


For information refer to "Factors to Consider" at daltile.com/Factors.

# SLAB PERFORMANCE CHARACTERISTICS

	Test Method	Average Result*
Abrasion Wear Index	ASTM C501	≥ 135
Bulk Specific Gravity	ASTM C97	≤ 2500 kg / cubic meter
Chemical Resistance	ASTM C650	Resistant to typical household cleaners
Coefficient of Thermal Expansion	ASTM C531	≤ 4.0E-05 mm/mm C
Flexural Strength	ASTM C880	≥ 35 MPa
Water Absorption	ASTM C97	≤ 0.10%
Scratch Resistance (Mohs Hardness)	ASTM C1895	≥ 5
Stain Resistance	ANSI Z124.6	Pass
Thermal Shock Resistance	ASTM C484	Pass – No Effect

<sup>\*</sup> Custom testing results by color are available upon request.










# AMERICAN FINESSE, SIGNIFICANT DESIGN

Inspired by the stone monuments that memorialize this great country, the National Marble Series inspires charming American design and embodies the quality of the world's finest marbles. Made in the USA. and bearing the heritage of products well made, this series allows you elegant style and outstanding durability. Enjoy unsurpassed endurance in the kitchen, bathroom, or commercial setting.

\*Made in the USA with imported material.

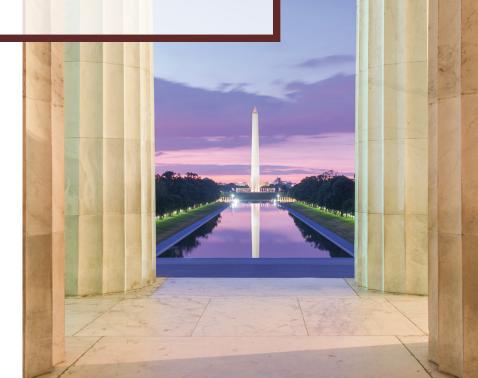










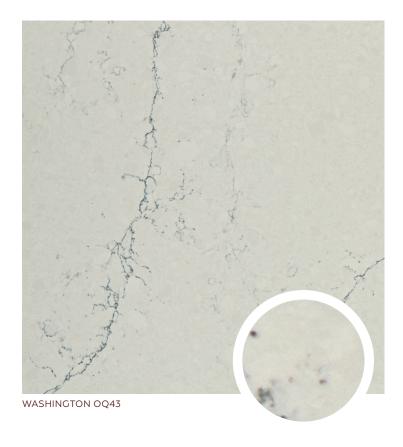

















## PRODUCT INFORMATION

Finish	Actual Size	Thickness
Polished	135-7/8" x 78-3/4" (345 cm x 200 cm)	1-1/4" (3 cm) & 3/4" (2 cm)

Custom slab finishes in honed and leather are available by special order.

Not all colors available in alternative finishes. Please contact your local slab center for availability.

Thinner slabs available upon request. Please contact your local slab center to confirm sizes and availability.

## **APPLICATIONS**

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	<b>✓</b>
Pool Linings	N/A	

ONE Quartz Surfaces do not meet minimum coefficient of friction thresholds recommended by safety standard-setting organizations. Water, oil, grease, etc., create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection.

## APPLICATION NOTES:

Historic Series and National Marble Series not suitable for exterior applications due to small resin content. The sun will etch the material.



Twenty Five Year Commercial Limited Warranty, visit daltile. com for complete warranty details.



Lifetime Residential Limited Warranty, visit daltile.com for complete warranty details.



MADE IN THE USA WITH IMPORTED MATERIAL.



To See Approved Colors, Please Check The Below Link:

info.nsf.org/Certified/Food/ Listings.asp?Company=C053 6133&Standard=051

#### INSTALLATION

Grout Joint Recommendation	Shade Variation
1/16"	Medium (V2)

## NOTES

ONE Quartz Surfaces products are nonporous, reducing the potential for bacteria growth, resist common food stains and are stronger than natural granite.

ONE Quartz Surfaces products are virtually maintenance free.

ONE Quartz Surfaces products contain natural quartz stone providing consistent color and visual movement. A wide range of color options allow for more design freedom.

 $\ensuremath{\mathsf{ONE}}$  Quartz Surfaces products have a durable, scratch-resistant surface.

ONE Quartz Surfaces products are heat and scorch-resistant under normal cooking conditions (use of a trivet is recommended for longer or extreme heat exposure).

Visit www.daltile.com/countertops-product-category/one-quartz for additional polished, semi-polished, honed and leather finish details.

Twenty-Five year limited warranty. Visit daltile.com/ONEQuartz for details

White thin-set or mortar is recommended for the lighter colors of ONE Ouartz Surfaces tiles.

For information refer to "Factors to Consider" at daltile.com/Factors.

# SLAB PERFORMANCE CHARACTERISTICS

	Test Method	Average Result*
Abrasion Wear Index	ASTM C501	≥ 135
Bulk Specific Gravity	ASTM C97	≤ 2500 kg / cubic meter
Chemical Resistance	ASTM C650	Resistant to typical household cleaners
Coefficient of Thermal Expansion	ASTM C531	≤ 4.0E-05 mm/mm C
Flexural Strength	ASTM C880	≥ 35 MPa
Water Absorption	ASTM C97	≤ 0.10%
Scratch Resistance (Mohs Hardness)	ASTM C1895	≥ 5
Stain Resistance	ANSI Z124.6	Pass
Thermal Shock Resistance	ASTM C484	Pass – No Effect

<sup>\*</sup> Custom testing results by color are available upon request.

