



MOSAIC

DECORATIVE
OPULENCE™
GLASS

 **daltile®**
IMAGINE WHAT'S POSSIBLE™

DECORATIVE
OPULENCE™
GLASS

Linear Luxury

Jewel tone colors and a random linear glass tile pattern make Opulence a stunning addition to backsplashes and feature walls. Easy to clean and tolerant of outdoor extremes, this wall tile stays lustrous and on-trend over many years.

- ARTISTIC DETAILS
 - 10 jewel tone colors to enliven walls in any space including outdoors
 - 3/8 inch random linear pattern for on-trend design
 - Interlocking edges for seamless feature wall application
- DURABLE BEAUTY
 - Glass tile on the wall withstands extreme temperatures for classy outdoor entertaining
 - Easy to clean so it makes a great backsplash
 - Makes a statement that is timeless



MOSAIC

USAGE



FLOOR



WALL



COUNTERTOP



SHOWER FLOOR



EXTERIOR FLOOR



STEPWISE™



TRU-EDGE™



MADE IN THE U.S.A.



LARGE FORMAT



MOSAIC/DECO



ENCAUSTIC



TERRAZZO



PAVER



CUSTOMIZE



FLEXFIT™



GLASS



LOW HIGH

SEE CHARTS FOR FULL PRODUCT DETAILS

Photo features Opal 5/8 x random linear mosaic on the wall.


SIZES:



3/8 x Random
Linear Mosaic

FINISHES: GLOSSY

GLASS MOSAICS

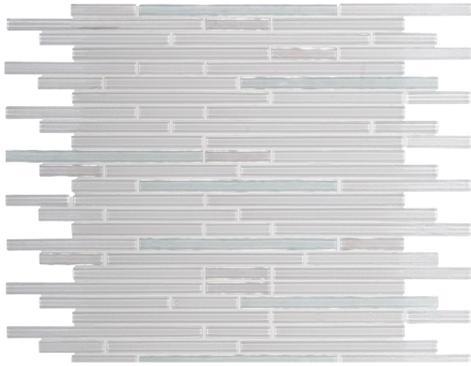

DIAMOND OP01




SILK OP04



AMBER OP09



OPAL OP06

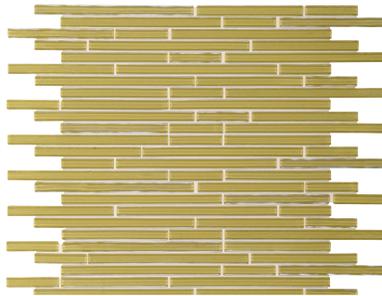


GEMSTONE OP07



RUBY OP05



INDIGO OP03

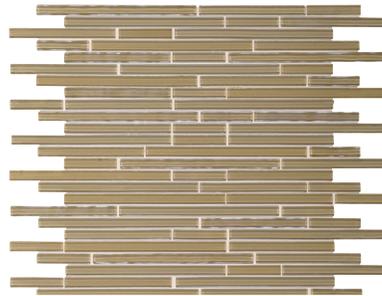

SANDSTONE OP10



AQUAMARINE OP02



ONYX OP08



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT*
*Applicable to products with Matte and Textured Finishes



FIRE-RESISTANT*
*Not Applicable to Mesh-Mounted Mosaics



CLIMATEPRO™



SIMPLICLEAN™

SIZES

	Thickness	Sq. Ft./ Carton	Pieces/ Carton
 3/8 x Random Linear Mosaic (Mesh-mounted) (11-5/8" x 11-5/8" Sheet) (29.50 cm x 29.20 cm Sheet)	1/8"	10.76	10

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltille.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications in non-freezing climates, when proper installation methods are followed.

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8" Approximately	 High (V3) to Random (V4)

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 100 lbs
Scratch Hardness	MOHS	4.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: daltille.com/information/TestResults.

NOTES

Strong random shading enhances the natural beauty of this product. To achieve optimal results, tile should be selected from multiple cartons and shading arrangement planned prior to installation.

Since there are variations in all glass products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile samples or color reproductions. Manufactured in accordance with ANSI A137.2 standards.

For additional information refer to "Factors to Consider" at daltille.com/Factors.

 **PRE-CONSUMER RECYCLED MATERIALS**

All or select items within this series meet the requirements for these qualifications. For more information, visit daltille.com.