



FLOOR

**PORCEALTO™**  
COLORBODY™ PORCELAIN

 **daltile®**  
IMAGINE WHAT'S POSSIBLE™



Cover and above photos feature Porcelato™ Bianco Ghiaccio 12 x 12 and Urban Metals™ Bronze 2 x 12 spiral floor/wall border on the floor.

## Powerful Performance with the Look of Luxury

Nothing is more inspiring than running warm sand through your fingers; this was the inspiration behind the Porcelato collection. Serenely beautiful, you would never guess that this organic beauty can withstand the toughest stains and even frost. Available in a range of colors and surface finishes, Porcelato never fails to provide an added depth to your space.

- **STRONG DESIGN**
  - Organic design inspired by warm sand
  - Technical ColorBody™ porcelain for commercial applications
- **BEAUTIFUL FINISH**
  - Available in polished, unpolished and textured surfaces
  - Coordinating trim available for those finishing touches



### **PRE-CONSUMER RECYCLED MATERIALS**

All or select items within this series meet the requirements for these qualifications. For more information visit [daltile.com](http://daltile.com).



#### USAGE

Floors

Walls

Countertops


F

W

C



## FLOOR TILE

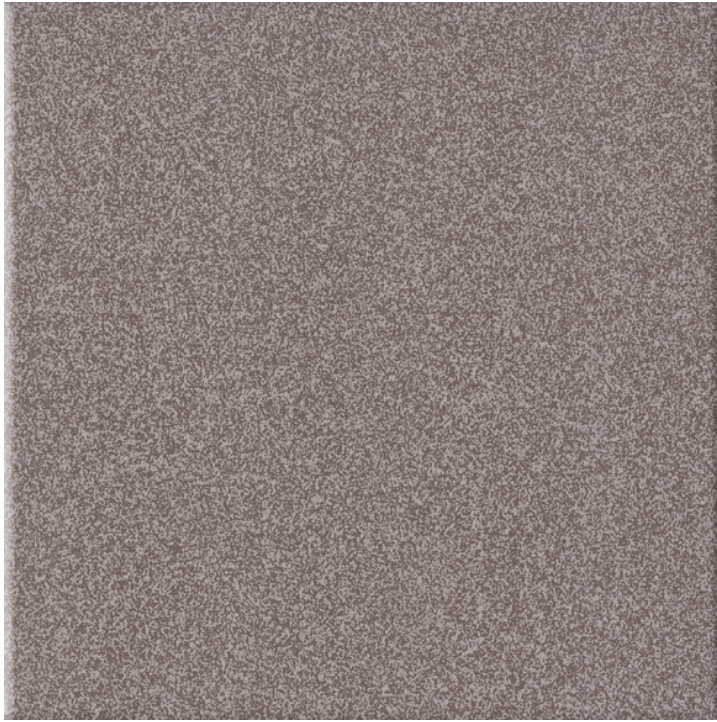

GRIGIO SCURO CD42 (1)



BIANCO GHIACCIO-SOLID  
CD28 (2)



FUORI DI BIANCO CD39 (1)



BEIGE CD31 (1)



BIANCO ALPI CD05 (1)



PEPE GRIGIO CD41 (1)



GRIGIO GRANITE CD40 (1)



MANDORLA CON SPEZIA  
CD78 (1)



MARRONE CANNELLA  
CD77 (1)



ROSA ANTICO CD56 (1)



LABRADORITE CD49 (1)



VERDE ALGHERO CD07 (1)



NERO MACCHIATO  
CD37 (1)

(1) and (2) indicate Price Group, (1) being the least expensive.

FLOOR TILE

	8 x 8 Unpolished	12 x 12 Unpolished	12 x 12 Textured
CD05	STK	STK	STK
CD07	STK	STK	N/A
CD28	STK	STK	N/A
CD31	STK	STK	STK
CD37	STK	STK	N/A
CD39	STK	STK	N/A
CD40	STK	STK	STK
CD41	STK	STK	STK
CD42	STK	STK	STK
CD49	STK	STK	N/A
CD56	STK	STK	N/A
CD77	STK	STK	N/A
CD78	STK	STK	N/A

TRIM

	S4489 4 x 8 SBN	S3689T 6 x 8 CV BS	SB3689T 1 x 6 CV In	SC3689T 1 x 6 CV Out	S44C9 4 x 12 SBN
CD05	STK	STK	STK	STK	STK
CD07	STK	STK	STK	STK	STK
CD28	STK	STK	STK	STK	STK
CD31	STK	STK	STK	STK	STK
CD37	STK	STK	STK	STK	STK
CD39	STK	STK	STK	STK	STK
CD40	STK	STK	STK	STK	STK
CD41	STK	STK	STK	STK	STK
CD42	STK	STK	STK	STK	STK
CD49	STK	STK	STK	STK	STK
CD56	STK	STK	STK	STK	STK
CD77	STK	STK	STK	STK	STK
CD78	STK	STK	STK	STK	STK



SIZE/TRIM NOTES:

STK- Stocked    SP- Special Order    N/A- Not Available

Floor bullnose and cove base trim are intended to coordinate with floor tile in the standard 90-degree installation position.



**SIZES** (See charts below for sizes & surfaces available by color)

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	12 x 12 Floor Tile	(11-13/16" x 11-13/16") (30.00 cm x 30.00 cm)	5/16"	15.00	15
	8 x 8 Floor Tile	(7-13/16" x 7-13/16") (19.80 cm x 19.80 cm)	5/16"	13.30	30

**APPLICATIONS**

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓
Shower Floors (Residential or Light Commercial)		
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	✓*
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	



A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest™, visit [daltile.com/DCOF](http://daltile.com/DCOF).

**APPLICATION NOTES:**

Suitable for exterior applications in freezing and non-freezing climates, when proper installation methods are followed.

\* Textured only

**INSTALLATION**

Grout Joint Recommendation	Shade Variation
1/4"	 Low (V1) – CD28  Medium (V2)

**PERFORMANCE CHARACTERISTICS**

	ASTM#	Unpolished Result	Textured Result	Polished Result
Water Absorption	C373	< 0.5%	< 0.5%	< 0.5%
Breaking Strength	C648	> 478 lbs	> 520 lbs	> 497 lbs
Scratch Hardness	MOHS	7.5	8.0	7.5
Chemical Resistance	C650	Resistant	Resistant	Resistant
Abrasion Resistance	C1027	N/A	N/A	N/A

For additional information on test results, visit us at: [daltile.com/information/TestResults](http://daltile.com/information/TestResults).

**NOTES**

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: [daltile.com/Factors](http://daltile.com/Factors).

Manufacturer Advisory: All tile is measured by the DCOF AcuTest™ method. Tiles with DCOF values <0.42 are not recommended for use in areas with wet or slippery conditions. For more information, see ANSI standard A137.1 section 6.2.2.1.10, available at [www.tileusa.com](http://www.tileusa.com). Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.



DESIGNED TO HELP EARN LEED™  
 CREDITS. For more detailed information,  
 visit [daltilegreenworks.com](http://daltilegreenworks.com).

7834 C.F. Hawn Freeway,  
 Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of  
 Daltile® products and information,  
 visit our website at [daltile.com](http://daltile.com).



©2017 Daltile (7/17)