



FABRIC LOOK

P'ZAZZ™
COLORBODY™ PORCELAIN

 daltile®
IMAGINE WHAT'S POSSIBLE™

Energize Your Space With Elegant Brilliance

Sometimes your space needs a little something extra to stand out from the crowd. P'Zazz will give you just that—a subtle hint of shine that makes you stop and take notice. Rich colors give this series an elegant feel and its shimmering surface will give any space the glamour it deserves.

- **LUSTER LOOK**

- Contemporary textured fabric style
- Unique subtle shimmering surface

- **BRILLIANT POSSIBILITIES**

- Offered in 6 glimmering colors in warm and cool hues
- Coordinating solid and blended mosaics available

FABRIC LOOK

USAGE



FLOOR



WALL



COUNTERTOP



SHOWER
FLOOR



EXTERIOR
FLOOR



STEPWISE™



TRU-EDGE™



MADE IN
THE U.S.A.



LARGE
FORMAT



MOSAIC/
DECO



ENCAUSTIC



TERRAZZO



PAVER



CUSTOMIZE



FLEXFIT™



P'ZAZZ



LOW HIGH

SPECIAL FEATURES

NOT APPLICABLE
FOR ALL PRODUCTS
IN THIS SERIES. SEE
CHARTS FOR FULL
PRODUCT DETAILS.

SIZES:
12 x 24
Floor Tile

FINISHES: MATTE

FLOOR TILE



WHITE RITZ P261 (2)



BEIGE FLAIR P262 (1)




TAN DAZZLE P263 (1)



GOLD GLAM P264 (1)



GRAY SHIMMER P265 (1)

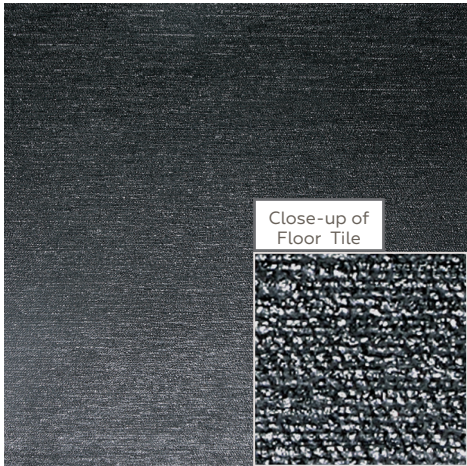

BLACK DRAMA P266 (2)

(1) and (2) indicate Price Group, (1) being the least expensive.

- 

SLIP RESISTANT
- 

WATERPROOF
- 

STAINPROOF
- 

DENTPROOF
- 


SCRATCH-RESISTANT
- 

FIRE-RESISTANT
- 

CLIMATEPRO™
- 

SIMPLICLEAN™

SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	12 x 24 Floor Tile	(11-3/4" x 23-9/16") (29.80 cm x 59.80 cm)	3/8"	15.49	8

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltille.com/DCOF.


APPLICATION NOTES:

Suitable for exterior applications in freezing and non-freezing climates, when proper installation methods are followed.




All or select items within this series meet the requirements for these qualifications. For more information, visit daltille.com.

TRIM

Type	Number	Size	Pieces/ Carton
 Bullnose	S-43C9	3 x 12	33

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8" (3/16" when multiple sizes are installed in a modular pattern, and/or when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.)	 Medium (V2)

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: daltille.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance			
1	Residential Bathrooms	3	All Residential / Light Commercial
2	All Residential Areas	④	All Residential / Commercial

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information, refer to "Factors to Consider" at daltille.com/Factors.

Special consideration must be given when installing tiles greater than 15 inches. Please refer to daltille.com/LargeTiles for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.