



GLAZED CERAMIC









FINISHES: MATTE | GLOSSY






3 x 12 PICKET WALL TILE - UNDULATED



3 x 12 PICKET WALL TILE - UNDULATED



CAMEO BLUE MIX SC71 (12 unique designs)*



ENSEMBLE BLACK MIX SC70 (9 unique designs)*

*Available in unique designs which are pre-boxed in a random assortment.











OF DENTPROOF SCRATCH-RESISTANT' FIRE-RESISTANT

STAGECRAFT[™] **GLAZED CERAMIC**

3 x 12 WALL TILE - UNDULATED



ARCTIC WHITE 0190 MATTE ARCTIC WHITE 0790



BLACK K111 MATTE BLACK K711



DESERT GRAY X114 MATTE DESERT GRAY X714




GALAXY 1469 MATTE GALAXY 1769



SPA 0148 MATTE SPA 0748

6 x 6 KALEIDOSCOPE MOSAIC - UNDULATED

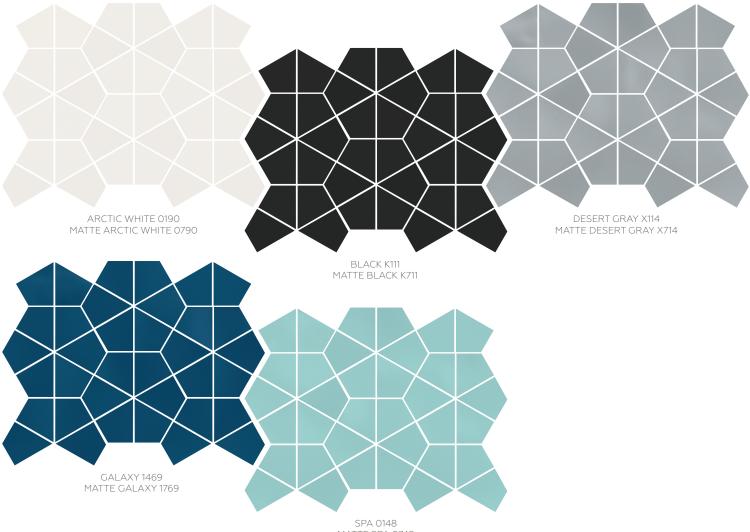

MATTE SPA 0748

JOLLY TRIM - SOLID COLORS

ARCTIC WHITE 0190 (1) MATTE ARCTIC WHITE 0790 (1)

BLACK K111 (2) MATTE BLACK K711 (2) DESERT GRAY X114 (1) MATTE DESERT GRAY X714 (1) GALAXY 1469 (3) MATTE GALAXY 1769 (3)

STAGECRAFT[™]

GLAZED CERAMIC

SIZES

		Thickness	Sq. Ft./ Carton	Pieces/ Carton
3 x 12 Picket Wall Tile [†]	(3" x 12") (7.63 cm x 30.70 cm)	5/16" (8.5 mm)	8.80	40
3 x 12 Wall Tile*	(3" x 12") (7.65 cm x 30.70 cm)	5/16" (7.9 mm)	12.00	48
6 x 6 Kaleidoscope Mosaic*	(12" x 15" Sheet) (30.48 cm x 38.10 cm Sheet) Dot-mounted	1/4" (6 mm)	10.00	10

[†] Solid colors available in glossy and matte finishes. Decos available in glossy finish only.

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	/ *
Wet & Level – Interior Floor	≥ 0.42	/ *
Shower Floors (Residential or Light Commercial)	≥ 0.42	/ *
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	√ *
Pool Linings	N/A	/ **

A DCOF value of \geq 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest", visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

TRIM

Туре	Number	Size	Pieces/ Carton
12" Jolly*	S1/212J	1/2 × 11-15/16	12

^{*}Available in solid colors only.

INSTALLATION

Grout Joint Recommendation	Shade Variation

3 x 12 Picket Wall Tile: 1/16"

3 x 12 Wall Tile: 1/16" (When rectangular size is installed in a staggered brick-joint pattern, overlap should not exceed 33%.)

Mosaic: 1/8"



Solids:

Low (V1)

PERFORMANCE CHARACTERISTICS

	ASTM#	Mosaic Result	Wall Result
Water Absorption	C373	< 3.0%	< 20%
Breaking Strength	C648	< 250 lbs	120 - 230 lbs
Scratch Hardness	MOHS	Glossy: 4.0 - 6.0 Matte: 7.0	4.0 - 6.0
Chemical Resistance	C650	Resistant	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

Random visuals enhance the natural beauty of this product. To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.







All or select items within this series meet the requirements for these qualifications. For more information, visit daltile.com.







^{*} Available in solid colors only.

^{*} Matte mosaic tile only

^{**} Mosaic tile only.