



FLOOR

TERRACE™
COLORBODY™ PORCELAIN

 **daltile®**
IMAGINE WHAT'S POSSIBLE™



Cover photo features Terrace™ Walnut 6 x 36 in a staggered brick-joint pattern on the floor.
Above photo features Terrace™ Cherry 6 x 36 in a staggered brick-joint pattern on the floor.

A Contemporary Take on Traditional Wood Looks

Experience the countryside with the Terrace series. This durable wood-look tile is easier to maintain than traditional wood floors, making it ideal for high-traffic areas. Available in six warm colors, Terrace creates a welcoming ambiance in any space.

- NATURAL BEAUTY
 - Wood-look ColorBody™ Porcelain with a contemporary edge
 - Offered in six warm colors
- ORGANIC APPEAL
 - Easier to maintain than traditional wood floors
 - Its durability and versatile nature makes it ideal for high-traffic areas and commercial installations

PORCELAIN
TILE
0.5% or less water absorption

Professional
TILE SOLUTIONS

FLOOR

TERRACE™

COLORBODY™ PORCELAIN

FLOOR TILE



BIANCO P100



CHERRY P104




HICKORY P101



ESPRESSO P105




GOLD P102

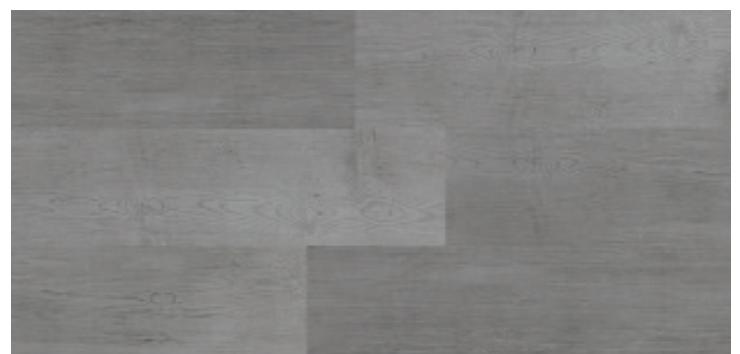

WILLOW P106



WALNUT P103

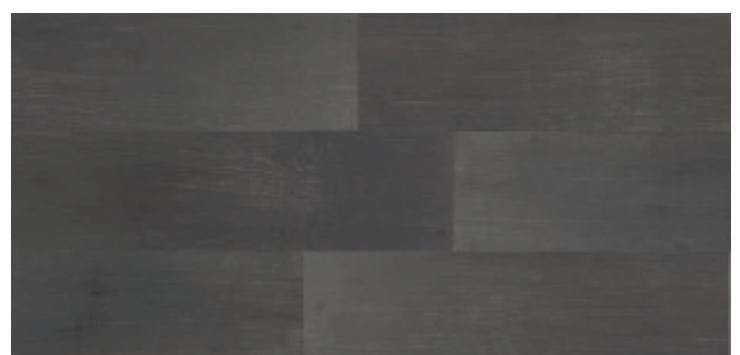

IRONWOOD P107

TERRACE™

COLORBODY™ PORCELAIN

SIZES

		Thickness	Sq. Ft. per Carton	Pieces per Carton	
	6 x 36 Floor Tile	(5-3/4" x 35-3/4") (14.60 cm x 90.80 cm)	1/2"	12.00	8

FLOOR APPLICATIONS

	Target DCOF Wet	Suitable
Dry Level - Interior	N/A	✓
Wet Level - Interior	≥ 0.42	✓
Exterior Applications, pock decking & other wet areas with minimal footwear	≥ 0.60	
Ramps & Inclines	≥ 0.65	

OTHER APPLICATIONS

	Suitable
Walls / Backsplashes	✓
Countertops	✓
Pool Linings	

APPLICATION NOTES:

Suitable for exterior applications in freezing and non-freezing climates when proper installation methods are followed.

TRIM

Type	Number	Size	Pieces per Carton
	S-43H9	3 x 18	32

Bullnose trim is intended to coordinate with floor tile in the standard 90-degree installation position.

INSTALLATION

Grout Joint Recommendation	Shade Variation
3/16"	 High (V3)

TEST RESULTS

	ASTM#	Results
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 400 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

NOTES

Special consideration must be given when installing tiles greater than 15 inches. Please refer to [daltile.com/LargeTiles](#) for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

Since there are variations in all fired ceramic products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.

For additional information, refer to "Factors to Consider" at [daltile.com/Factors](#).



DESIGNED TO HELP EARN LEED™ CREDITS. For more detailed information, visit [daltilegreenworks.com](#).



SCAN QR CODE
FOR PRODUCT
INFORMATION

Get a QR Code
reader at:
[GET.DALTILE.COM](#)



7834 C. F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at [daltile.com](#).

daltile®
IMAGINE WHAT'S POSSIBLE™
©2017 Daltile (1/17)