



FLOOR

UNITY™

COLORBODY™ PORCELAIN

 **daltile®**
IMAGINE WHAT'S POSSIBLE™



Cover photo features Avorio and Tobacco 12 x 24 field tile and Urban Metals™ Gunmetal 2 x 12 spiral border on the floor. Above photo features Tobacco 24 x 24 field tile on the floor.

The Unity of Performance and Style Without Compromise

Your space requires peak performance and outstanding durability. Your design, however, calls for contemporary style and sophistication. This can be achieved with the ColorBody™ porcelain line, Unity™. This double-load porcelain tile is one of the toughest tiles available, yet it doesn't compromise on style. Style and performance unite with Unity from Daltile.

- **DOUBLE-LOAD PORCELAIN PRODUCED WITH MICROPOWDERS**
 - Offers the high performance of double-load ColorBody™ porcelain
 - Creates a more uniform visual for contemporary minimalist look
- **TRU-EDGE™**
 - Rectified for a seamless, unified look in large areas
- **CONTEMPORARY COLOR PALETTE & VISUAL**
 - Available in seven contemporary colors
 - Textured, unpolished and polished surfaces provide options for any space



**PRE-CONSUMER
RECYCLED MATERIALS**



TRU-EDGE


**CERTIFIED
PORCELAIN™**
TILE
0.5% or less water absorption

POLISHED FIELD TILE




Close-up
of tile


TOBACCO P403

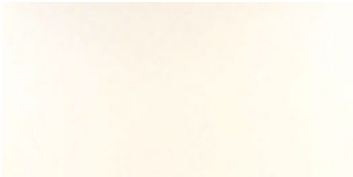


AVORIO P400

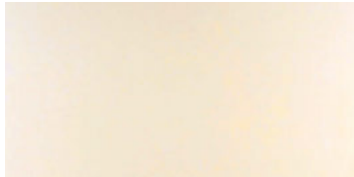

BEIGE P401

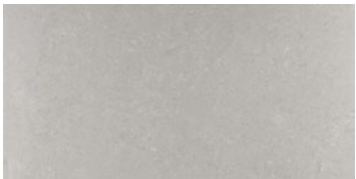


ASHGREY P405

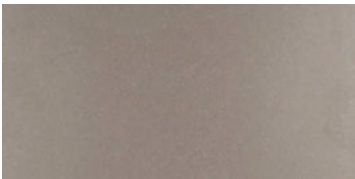

GRIGIO P402



COFFEE P404

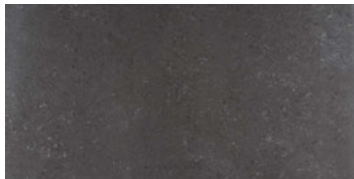

NERO P406

UNPOLISHED FIELD TILE




Close-up
of tile

TOBACCO P403



AVORIO P400

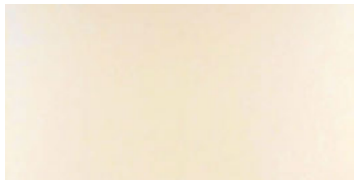

BEIGE P401




ASHGREY P405



GRIGIO P402



COFFEE P404

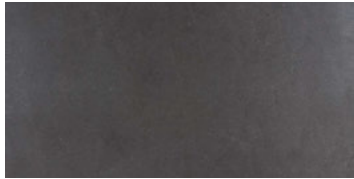

NERO P406

TEXTURED FIELD TILE



Close-up
of tile

TOBACCO P403



AVORIO P400



BEIGE P401



ASHGREY P405



GRIGIO P402



COFFEE P404



NERO P406


DECORATIVE ACCENTS




AVORIO P400
12 x 12 Modern Liner



BEIGE P401
12 x 12 Modern Liner

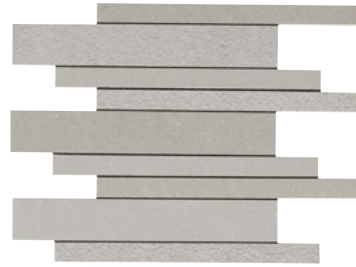

ASHGREY P405
12 x 12 Modern Liner

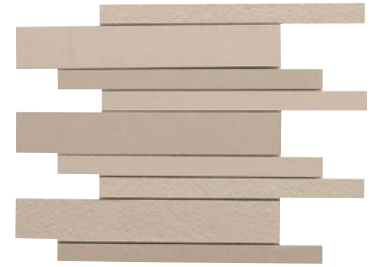

TOBACCO P403
12 x 12 Modern Liner



GRIGIO P402
12 x 12 Modern Liner







COFFEE P404
12 x 12 Modern Liner



NERO P406
12 x 12 Modern Liner

SIZES

			Thickness	Sq. Ft. per Carton	Pieces per Carton
	24 x 24 Field Tile (Unpolished & Polished)	(23-7/16" x 23-7/16") (59.44 cm x 59.44 cm)	3/8"	15.28	4
	12 x 24 Field Tile (Unpolished, Polished & Textured)	(11-1/2" x 23-7/16") (29.56 cm x 59.44 cm)	3/8"	15.28	8
	12 x 12 Field Tile (Unpolished & Polished)	(11-1/2" x 11-1/2") (29.56 cm x 29.56 cm)	3/8"	10.23	11
	12 x 12 Modern Liner (Combination of surfaces)	(11-1/2" x 11-1/2") Sheet (29.56 cm x 29.56 cm Sheet)	3/8"	--	11

FLOOR APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior	N/A	✓
Wet & Level – Interior	≥ 0.42	✓*
Exterior Applications; Pool Decking & Other Wet Areas with Minimal Footwear	≥ 0.60	✓**
Ramps & Inclines	≥ 0.65	

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

OTHER APPLICATIONS

	Suitable
Walls/Backsplashes	✓
Countertops	✓
Pool Linings	

APPLICATION NOTES:




* Unpolished and textured surfaces only

** Textured surface only

Polished surface is suitable only for dry and level floor applications.


Suitable for exterior applications in freezing and non-freezing climates when proper installation methods are followed.

TRIM

	Type	Number	Size	Pieces per Carton
	Bullnose (Unpolished and Polished)	S-43C9S	3 x 12	30
	Cove Base	S-36C9TA	6 x 12	20
	Cove Base Outcorner	SC-36C9TA	1 x 6	10

Bullnose, cove base, and cove base corner trim are intended to coordinate with floor field tile in the standard 90-degree installation position.

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8" (3/16" when multiple sizes are installed in a modular pattern, and when installed in a staggered brick-joint pattern; overlap should not exceed 33%)	 Medium (V2)

TEST RESULTS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 450 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

NOTES

Manufacturer Advisory (POLISHED ONLY): These tiles have a dynamic coefficient of friction <0.42 as measured by the DCOF Acutest method. Tiles with DCOF values <0.42 are not recommended for use in areas with wet or slippery conditions. For more information, see ANSI standard A137.1 section 6.2.2.1.10, available at www.tileusa.com.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltile.com/LargeTiles for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

Since there are variations in all fired ceramic products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.

For additional information refer to "Factors to Consider" at daltile.com/Factors.



DESIGNED TO HELP EARN LEED™ CREDITS. For more detailed information, visit daltilegreenworks.com.

SCAN QR CODE FOR PRODUCT INFORMATION

Get a QR Code reader at: GET.DAL TILE.COM



7834 C. F. Hawn Freeway, Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at daltile.com.



IMAGINE WHAT'S POSSIBLE™

©2016 Dal-Tile Corporation (8/16)