


CHOCOLATE PF08

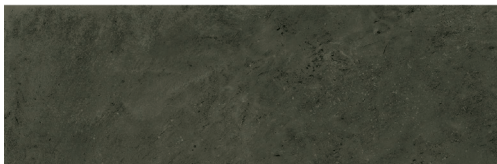

CHARCOAL PF09

PRE-CONSUMER RECYCLED MATERIALS

MADE IN THE U.S.A.

REVEAL IMAGING®

CERTIFIED PORCELAIN™ TILE
0.5% or less water absorption

ZEROTOX
Healthy Homes | Healthy Planet

FLOOR/WALL

PORTFOLIO™

COLORBODY™ PORCELAIN

STARBUCKS CUSTOM ITEM DESCRIPTION

Color	PF08 Chocolate
Color	PF09 Charcoal
UOM	Square Foot

CONTACT INFORMATION

Orders & Design: starbucks@daltile.com

Please note: Image above displays the graphic design for the custom tile detailed in this document. Samples of actual material are available upon request.

SIZE

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	24 x 24 Floor Tile	23-3/8" x 23-3/8" (59.44 cm x 59.44 cm)	5/16"	15.20	4
	6 x 24 Floor Tile	5-3/4" x 23-3/8" (14.63 cm x 59.44 cm)	5/16"	10.23	11

TRIM

Type	Number	Size	Pieces/ Carton	
	Cove Base	P36C9TB	6 x 12	22

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓
Exterior Applications, pool decking, & other wet areas with minimal footwear	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A1371-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

DAL-TILE 1-YEAR LIMITED WARRANTY (EXTENDED WARRANTIES AVAILABLE)

Dal-Tile Corporation warrants that manufactured products will be free from defect for a period of one-year from date of purchase. Defect is defined as a shortfall in the product to perform to Dal-Tile specifications as disclosed in product literature, within industry allowable tolerances as set forth in standard, national industry protocols. Dal-Tile provides detailed information in its product literature regarding appropriate tile and stone applications. Failure to comply with recommended applications voids this warranty. THIS ONE-YEAR EXPRESS WARRANTY IS THE SOLE WARRANTY EXTENDED AND REPLACES ANY STATUTORY WARRANTIES TO THE MAXIMUM EXTENT ALLOWABLE BY LAW. For full warranty information including implications, exclusions and limitations please visit www.Daltile.com.

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8" (3/16" when multiple sizes are installed in a modular pattern, and/or when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.)	Medium (V2)

Additional installation recommendations can be found in the current edition TCNA Handbook and/or NTCA Reference Manual

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance			
1	Residential Bathrooms	3	All Residential / Light Commercial
2	All Residential Areas	④	All Residential / Commercial

CARE AND MAINTENANCE

Please refer to the "DalTile Care and Maintenance Guide" available at www.Daltile.com

THE INFORMATION RELEASED IS A PROPOSAL FOR CLIENT CONSIDERATION PURPOSES ONLY. FINAL TEST RESULTS & PART NUMBERS WILL BE PROVIDED