

# ARTEA STONE™

GLAZED PORCELAIN

REVEAL IMAGING®

**MARAZZI**   
DARE TO BE BOLD™

## FLOOR TILE




Antico



Avorio



Noce

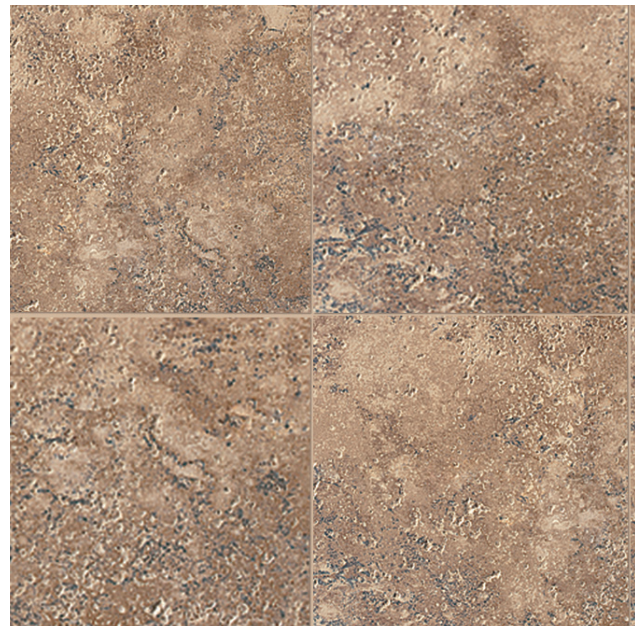




Cappuccino

## USAGE

| Floors | Walls | Countertops |
|--------|-------|-------------|
| F      | W     | C           |

## SIZES

|  |                          |  | Thickness | Sq. Ft./<br>Carton | Pieces/<br>Carton |
|--|--------------------------|--|-----------|--------------------|-------------------|
|  | 20 x 20<br>Floor Tile    | (19-11/16" x 19-11/16")<br>(50.00 cm x 50.00 cm) | 3/8"      | 18.83              | 7                 |
|  | 13 x 13<br>Floor Tile    | (13-1/8" x 13-1/8")<br>(33.30 cm x 33.30 cm)     | 5/16"     | 17.90              | 15                |
|  | 6-1/2 x 13<br>Floor Tile | (6-1/2" x 13-1/8")<br>(16.50 cm x 33.30 cm)      | 5/16"     | 10.65              | 18                |

## APPLICATIONS

|  | Target<br>DCOF wet | Suitable |
|--|--------------------|----------|
| Dry & Level - Interior Floor   | N/A                | ■        |
| Wet & Level - Interior Floor   | ≥ 0.42             | ■        |
| Shower Floors (Residential or Light Commercial)  | ≥ 0.42             |          |
| Exterior Floor Applications (including pool decking & other wet areas with minimal footwear) | ≥ 0.60             |          |
| Ramps & Inclines   | ≥ 0.65             |          |
| Walls/Backsplashes   | N/A                | ■        |
| Countertops  | N/A                | ■        |
| Pool Linings   | N/A                |          |

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit [marazzitile.com/DCOF](http://marazzitile.com/DCOF).

### APPLICATION NOTES:


Suitable for exterior applications in freezing and non-freezing climates, when proper installation methods are followed.

|            | Floor Tile |         |            | Trim                     |
|------------|------------|---------|------------|--------------------------|
|            | 20 x 20    | 13 x 13 | 6-1/2 x 13 | 3 x 13<br>Floor Bullnose |
| Antico     | UC4J       | UC4D    | UC48       | UC4R                     |
| Avorio     | UC4K       | UC4E    | UC49       | UC4S                     |
| Cappuccino | UC4H       | UC4C    | UC47       | UC4Q                     |
| Noce       | UC4G       | UC4B    | UC46       | UC4P                     |

## TRIM

| Description    | Size   | Shape   |
|----------------|--------|---|
| Floor Bullnose | 3 x 13 |  |

## INSTALLATION

| Grout Joint Recommendation   | Shade Variation  |
|--|--|
| 3/16" (Overlap should not exceed 33% when installing tile with a length 15" or greater in a staggered brick-joint pattern. When multiple sizes are installed in a modular pattern, please specify same size caliber at time of order.) |  Medium Variation |

## PERFORMANCE CHARACTERISTICS

|                     | ASTM# | Floor Result |
|---------------------|-------|--------------|
| Water Absorption    | C373  | < 0.5%       |
| Breaking Strength   | C648  | > 275 lbs    |
| Scratch Hardness    | MOHS  | 7.0          |
| Chemical Resistance | C650  | Resistant    |
| Abrasion Resistance | C1027 | IV           |

For additional information on test results, visit us at: [marazzitile.com/information/TestResults](http://marazzitile.com/information/TestResults).

## NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: [marazzitile.com/Factors](http://marazzitile.com/Factors).

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to [marazzitile.com/LargeTiles](http://marazzitile.com/LargeTiles) for more information.

Use of a latex modified thin-set is recommended for installation. For more information, visit [marazzitile.com](http://marazzitile.com).



Floor Tile



Wall Tile



Reveal Imaging®



Pre-Consumer  
Recycled Content

