

MARAZZI  USA

the fine art of porcelain stoneware


(artea stone)

glazed porcelain stoneware

Made In The USA



Made In The USA

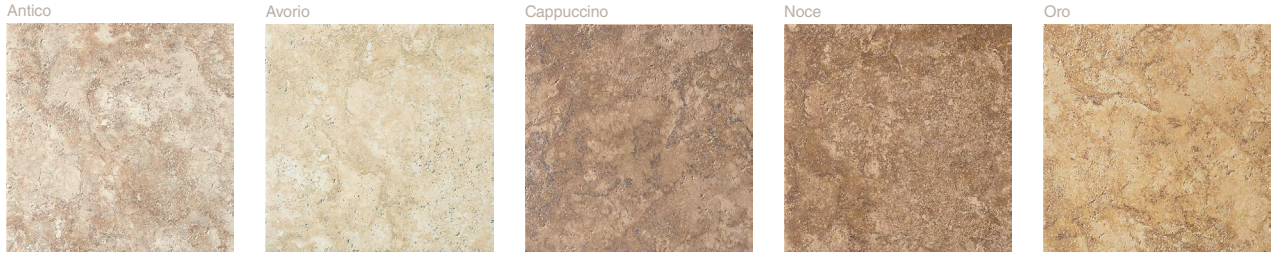

Contributes to LEED Credits made in the USA

	MODULAR TILE			FLOOR TILE	TRIMS*			
Thickness	6 1/2" x 6 1/2" (16.5x16.5 cm) 7/16" (10.5mm)	6 1/2" x 13" (16.5x33.3 cm) 7/16" (10.5mm)	13" x 13" (33.3x33.3 cm) 7/16" (10.5mm)	20" x 20" (50x50 cm) 7/16" (11mm)	6" x 8" (15x20 cm) Sanitary Cove Base**	1" x 6" (2.5x15 cm) Sanitary Cove Base In Angle**	1" x 6" (2.5x15 cm) Sanitary Cove Base Out Angle**	3" x 13" (8x33.3 cm) Bullnose
Names (colors)	UC43	UC48	UC4D	UC4J	UD1M	UD1S	UD1X	UC4R
Antico (light taupe)	UC44	UC49	UC4E	UC4K	UD1N	UD1T	UD1Y	UC4S
Avorio (ivory)	UC42	UC47	UC4C	UC4H	UD1P	UD1U	UD1Z	UC4Q
Cappuccino (cocoa)	UC3Z	UC46	UC4B	UC4G	UD1Q	UD1V	UD20	UC4P
Noce (brown)	UC3Y	UC45	UC4A	UC4F	UD1R	UD1W	UD21	UC4N
Oro (gold)								

Notes: * Trim is available in all colors and made to complement Modular and Floor Tile.
** Suggested for interior applications only.

ASTM Test Results

Technical Characteristics	ANSI Standards	ASTM Test Results	ASTM Test Methods
Water Absorption	≤0.50%	≤0.50%	C373
Frost Resistance	As Reported	Resistant	C1026
Scratch Resistance	MOHS 1-10	6	MOHS Scale
Breaking Strength	≥ 250 lbf.	≥ 350 lbf.	C648
Facial Dimension	-3.0% < Nominal ≤ 3.0%	Within Standard	C499
Nominal Thickness	≤ 0.04 in (1.02 mm max)	Within Standard	C499
Wedging (squareness)	+/- 0.50% or +/- 2.0 mm**	Within Standard	C502
Warpage (flatness)	+/- 0.75% or +/- 2.3 mm**	Within Standard	C485
Abrasion Resistance	Class 0 - Class V	Class IV	C1027
DCOF-Dynamic Coefficient of Friction (Wet Areas Only) [†]	As Reported	Minimum 0.42	DCOF AcuTest SM *
SCOF-Static Coefficient of Friction (Dry)	As Reported	0.70 ≤ S.C.O.F. < 0.80	C1028
SCOF-Static Coefficient of Friction (Wet)	As Reported	0.60 ≤ S.C.O.F. < 0.70	C1028
Chemical Resistance	Class A - Class E	Class A	C650
Stain Resistance	Class A - Class E	Class A	C1378



[†] Dynamic Coefficient of Friction (DCOF) - Water, oil, grease or other fluids create slippery conditions. When installing floors in areas with exposure to these conditions, a minimum D.C.O.F. value of 0.42 is required. Additionally, extra caution is required with regards to product selection and proper maintenance. Visit www.tcnatile.com for complete information regarding the DCOF AcuTest test method and values.
*DCOF AcuTest is the industry designation for the test procedure contained in ANSI A137.1 Section 9.6, which has been extensively researched, allows for in-situ field measurements, and is in use at tile manufacturing facilities. It was so named to distinguish it from other DCOF measurements using different instruments and/or protocols.
** Whichever is less