


CATWALK™

GLASS MOSAICS

GLASS MOSAIC



UJ9X Smokey Stiletto

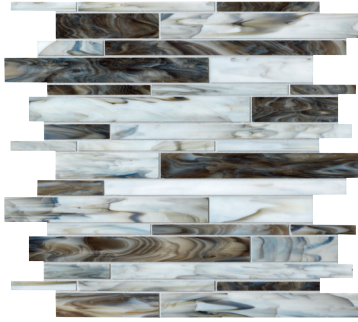

UJ9Y Sable Slipper




UJ92 Toffee Tennies




UJ9V Olive Oxfords




UJ9W Pecan Pump

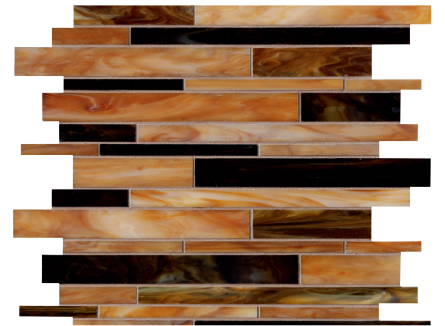


UJ9T Chocolate Clog

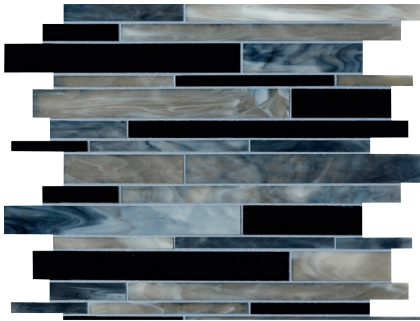


UJ9Z Steel Toe

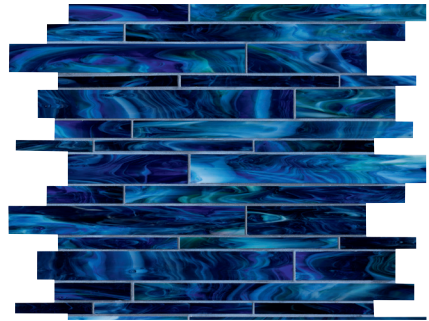

UJ9S Blue Ballet

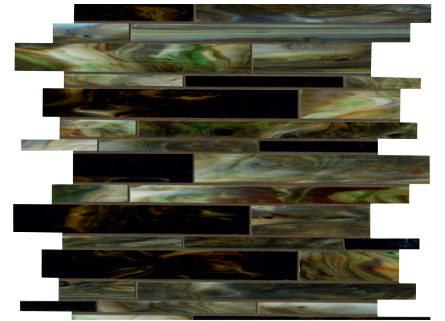

UJ9U Jade Jellies

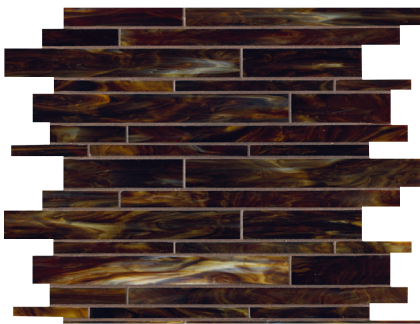


UJ93 Walnut Wedge

USAGE

Floors	Walls	Countertops
	W	

SIZES

		Thickness	Sq. Ft./ Carton	Pieces/ Carton
	Strip Mosaic (Mesh-Mounted)	1/4"	10	10
	(12-1/2" x 13" Sheet) (31.75 cm x 33.02 cm)			

APPLICATIONS


	Target DCOF wet	Suitable
Dry & Level - Interior Floor	N/A	
Wet & Level - Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	■
Countertops	N/A	
Pool Linings	N/A	■

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit marazzitile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications in freezing and non-freezing climates, when proper installation methods are followed

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8"	 Random Variation

PERFORMANCE CHARACTERISTICS

	ASTM#	Mosaic Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 100 lbs
Scratch Hardness	MOHS	4.0
Chemical Resistance	C650	Resistant
Abrasion Resistance	C1027	N/A

For additional information on test results, visit us at: marazzitile.com/information/TestResults.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.2 standards.

For additional information refer to "Factors to Consider" at: marazzitile.com/Factors.

Random visuals enhance the natural beauty of this product. To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Use of a white latex modified thin-set is recommended for installation. For more information, visit marazzitile.com.

