



Crystal Stone II

mesh-mounted glass/stone mosaics

Crystal Stone II

Tiny tessera and skinny strips fashion a big statement in Marazzi's expanded Crystal Stone collection. Bits of sparkly clear and subdued translucent glass intersperse with marble and slate segments, creating a sumptuous, ever-appealing palette of 12'x12" mesh-mounted mosaics. Sheets can be cut into smaller modules to customize residential and commercial walls and residential floors with no direct outside access.

The color ranges and ratios in Crystal Stone II are specifically developed to embellish the glorious shades of gray currently taking the market by storm. Gray gradations – pearl to taupe to charcoal to steel – synthesize with rich tones of chocolate, jade, rust, caramel and cream to effortlessly complement a broad range of surfacing materials. Crystal Stone II presents excellent alternatives for both classic and modern decor schemes.



PEWTER

ESPRESSO



Like musical counterpoint, the opaque marble and slate surfaces play off the shiny reflection of the glass, creating tactile variation as well as directing the eye's attention around a room to either call-out details or large areas of emphasis.



Crystal Stone II

floor and wall tile - mesh-mounted glass/stone mosaics



UL8U Espresso
12"x12"
Square Mosaic



UL8X Pearl
12"x12"
Square Mosaic




UL8Y Pewter
12"x12"
Square Mosaic



UL8Z Espresso
12"x12"
Strip Mosaic



UL94 Pearl
12"x12"
Strip Mosaic

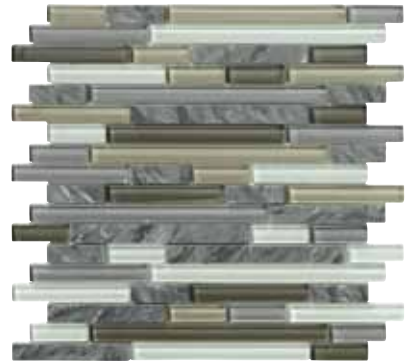

UL95 Pewter
12"x12"
Strip Mosaic

ASTM Test Results

Technical Characteristics	ASTM Standards	ASTM Test Results	ASTM Test Methods
Water Absorption	2% - 5%	2% - 5%	C373
Frost Resistance	As Reported	Resistant	C1026
Scratch Resistance	MOHS 1-10	5	MOHS Scale
Abrasion Resistance	Class 0 - Class V	Class III*	C1027
Dry Coefficient of Friction	As Reported	$0.60 \leq \text{C.O.F.} < 0.70$	C1028
Wet Coefficient of Friction	As Reported	$0.40 \leq \text{C.O.F.} < 0.50$	C1028
Chemical Resistance	Class A - Class E	Class A	C650
Stain Resistance	Class A - Class E	Class A	C1378

* Durability Classification / Suggested Applications

Class III: Tile in this class may withstand normal footwear and regular traffic, with some dirt and/or other abrasives present in limited quantities. Tile in this class may be used in light commercial installations with limited foot traffic and with no direct access to the outside including residential kitchens and hallways, with limited traffic from the outside. See Coefficient of Friction and Frost Resistance for installation-specific details.

** Whichever is less



Floor Tile



Wall Tile



Suitable for Outdoors



Average Shade Variation



Frost Resistant



Decorative Tile



Abrasion Resistance



0.4 C.O.F. (Wet)



0.6 C.O.F. (Dry)



UL8V Slate
12"x12"
Square Mosaic




UL8W Terracotta
12"x12"
Square Mosaic



UL92 Slate
12"x12"
Strip Mosaic



UL93 Terracotta
12"x12"
Strip Mosaic

	Sizes	Pcs	Sq. Ft.	Weight (lbs.)	Thickness
Square Mosaic	12" x 12"	6	5.81	21	Compatible
Strip Mosaic	12" x 12"	6	5.81	21	Compatible



American Marazzi Tile, Inc.
Headquarters & Manufacturing Plant

359 Clay Road
Sunnyvale, Texas 75182

Telephone
972.226.0110
Fax
972.226.5629

www.marazzitile.com
contact@marazzitile.com

CRYSTAL STONE II is available nationwide.
To locate your nearest Distributor call
American Marazzi Tile Customer Service
or visit www.marazzitile.com

DISTRIBUTED BY:

Color and other aesthetic features shown are as close as the limitation of the printing process will allow. We have tried to make this brochure as comprehensive and factual as possible. We reserve the right, however, to make changes at any time, without notice, in colors, materials, packaging, specifications and availability. Since some information may have been updated since time of printing, please check with American Marazzi Tile Customer Service for details.

©06.11 American Marazzi Tile, Inc. Z920 Crystal Stone II Brochure 10.0K - please recycle.