


GLAZED PORCELAIN

REVEAL IMAGING® | STEPWISE™





MERONA

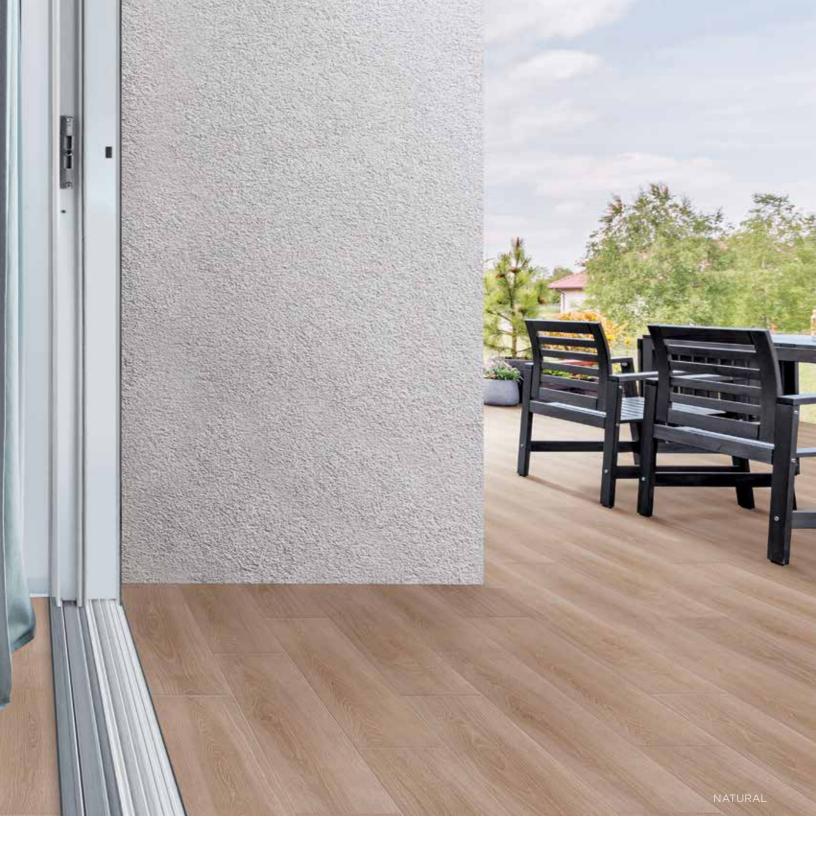

Welcome the hygge-inspired warmth of Merona into your designs. Smooth color in a light, natural grain invites relaxation and ease. StepWise™ technology lets your mind be at ease as well, making it an ideal selection for your indoor and outdoor installations. Long planks, 8x40 inches, offer a look and feel of continuity throughout. Keep design simple yet stunning with Merona.





Our **Stepwise**™ **Technology** provides superior slip resistance and is easy to clean. Create designer spaces without sacrificing style for safety.

When compared to tile meeting ANSI Standards

MERONA

GLAZED PORCELAIN

REVEAL IMAGING® | STEPWISE

FLOOR TILE









MR42 Brown



MR43 Grey

USAGE

Floors	Walls	Countertops
F	W	С



GLAZED PORCELAIN

REVEAL IMAGING® | STEPWISE

SIZES

		Thickness	Sq. Ft./ Carton	Pieces/ Carton
8 x 40 Floor Tile	(7-7/8" x 39-3/8") (20.00 cm x 100.00 cm)	5/16"	10.75	5

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level - Interior Floor	N/A	
Wet & Level - Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications		
(including pool decking & other	≥ 0.60	
wet areas with minimal footwear)		
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	
Countertops	N/A	
Pool Linings	N/A	
·		

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI AI37.1-A326.3. For more information about DCOF and the DCOF AcuTest", visit marazzitile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications in freezing and non-freezing climates, when proper installation methods are followed.

INSTALLATION

Grout Joint Recommendation	Shade Variation
3/16" (Overlap should not exceed 33% when installing tile with a length 15" or greater in a staggered brick-joint pattern.)	High Variation

PERFORMANCE CHARACTERISTICS

	ASTM#	Floor Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant
Abrasion Resistance	C1027	3

For additional information on test results, visit us at: marazzitile.com/information/TestResults.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: marazzitile.com/Factors.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to marazzitile.com/LargeTiles for more information.

Use of a latex modified thin-set is recommended for installation. For more information, visit marazzitile.com.



THAN ORDINARY TILE

EASY TO CLEAN

Stepwise™ Technology provides added slip resistance with a surface that is **easy to clean**.







Reveal Imaging®













PHOTOGRAPHY INDEX:

Cover

Merona $^{\sim}$ in Gray 8 x 40 on floor and White 8 x 40 on wall

Page 2-3

Merona[™] in Natural 8 x 40 on floor

Page 4 - 5

Merona[™] in Gray 8 x 40 on floor and White 8 x 40 on wall



7834 C.F. Hawn Freeway Dallas, Texas 75217

www.marazzitile.com contact@marazzitile.com

©2019 Marazzi | 06.19 | MZBRO132 Merona™ Brochure

Color and other aesthetic features shown are as close as the limitation of the printing process will allow. We have tried to make this brochure as comprehensive and factual as possible. We reserve the right, however, to make changes at any time, without notice, in colors, materials, packaging, specifications and availability. Since some information may have been updated since time of printing, please check with Marazzi Customer Service for details.