

MIDDLETON SQUARE™
GLAZED CERAMIC WALL

MARAZZI®
DARE TO BE BOLD™

WALL



MIDDLETON SQUARE™

With its modern take on artisanal, hand-formed masonry, Middleton Square™ lets vertical spaces speak for themselves. Available in six exquisite colors, the pairing of subtle undulation and a bold 4 x 12 size makes this a versatile choice for any fashion-forward design. Straight-line or staggered patterns can be installed vertically or horizontally and integrate stylishly with stone, wood and metal elements. Punctuating residential or commercial settings, Middleton Square adds striking sophistication to any room.



COVER PHOTO: STEEPLE GRAY
ABOVE PHOTO: URBAN MIST

WALL

FINISHES: GLOSSY

USAGE

 FLOOR

 WALL

 COUNTERTOP

 SHOWER FLOOR

 EXTERIOR FLOOR

MATERIAL

 C6

PRICING

 LOW HIGH

SPECIAL FEATURES

 STEPWISE™

 TRUEEDGE™

 MADE IN THE U.S.A.

 LARGE FORMAT

 MOSAIC/DECO

 ENCAUSTIC

 TERRAZZO


 PAVER

 CUSTOMIZE


WALL

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

WALL TILE

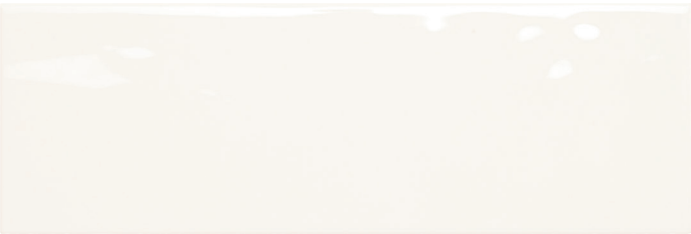

MS40 Oxford White

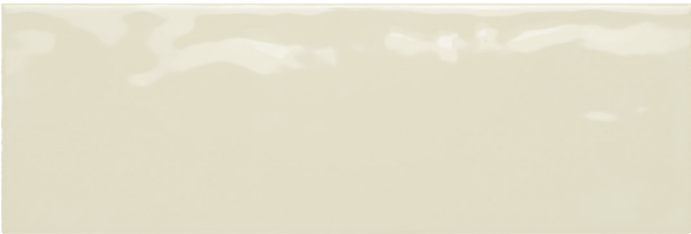

MS41 Windsor Cream



MS42 Latte



MS43 Urban Mist



MS44 Steeple Gray



STAINPROOF



DENTPROOF



FIRE-RESISTANT



SMPLCLEAN™

FINISHES: GLOSSY

USAGE

FLOOR

WALL

COUNTERTOP

SHOWER FLOOR

EXTERIOR FLOOR

MATERIAL

C^G

PRICING

LOW

HIGH

SPECIAL FEATURES

STEPWISE™

TRUEEDGE™

MADE IN THE U.S.A.

LARGE FORMAT

MOSAIC/DECO

ENCAUSTIC

TERRAZZO


PAVER

CUSTOMIZE


WALL

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	4 x 12 Wall Tile	4-1/4" x 12-7/8" (10.90 cm x 32.76 cm)	5/16"	10.64	28

APPLICATIONS


	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	
Countertops	N/A	
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit marazziusa.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

INSTALLATION

Grout Joint Recommendation	Shade Variation
Wall Tile: 1/16" (when rectangular size is installed in a staggered brick-joint pattern; overlap should not exceed 33%).	 Low Variation

PERFORMANCE CHARACTERISTICS

	ASTM#	Wall Result
Water Absorption	C373	< 20%
Breaking Strength	C648	120 - 230 lbs
Scratch Hardness	MOHS	4.0 - 6.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: marazziusa.com/information/TestResults.


NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

For additional information refer to "Factors to Consider" at: marazziusa.com/Factors.

FEATURES

 PRE-CONSUMER
RECYCLED MATERIALS

 All or select items within this series meet the requirements for these qualifications. For more information visit marazziusa.com.