





RICE™


Rice^{**} evokes the essence of handmade tile with its purposefully uneven surfaces and glossy finish. A neutral palette of Bianco, Natural, and Grigio, with undertones of Blu, comes in modular 6x6, 3x8 and 2x6 sizes and features straight edges. The integration of nature-inspired decos with four solid colors allows for customized installation patterns with distinct personalities, perfect for creating an intriguing visual with striking variation and depth.

COVER PHOTO: BIANCO & BIANCO DECO LEAF ABOVE PHOTO: BLU STRUCTURED & SCENARIO

NERO TRIANGLE

WALL



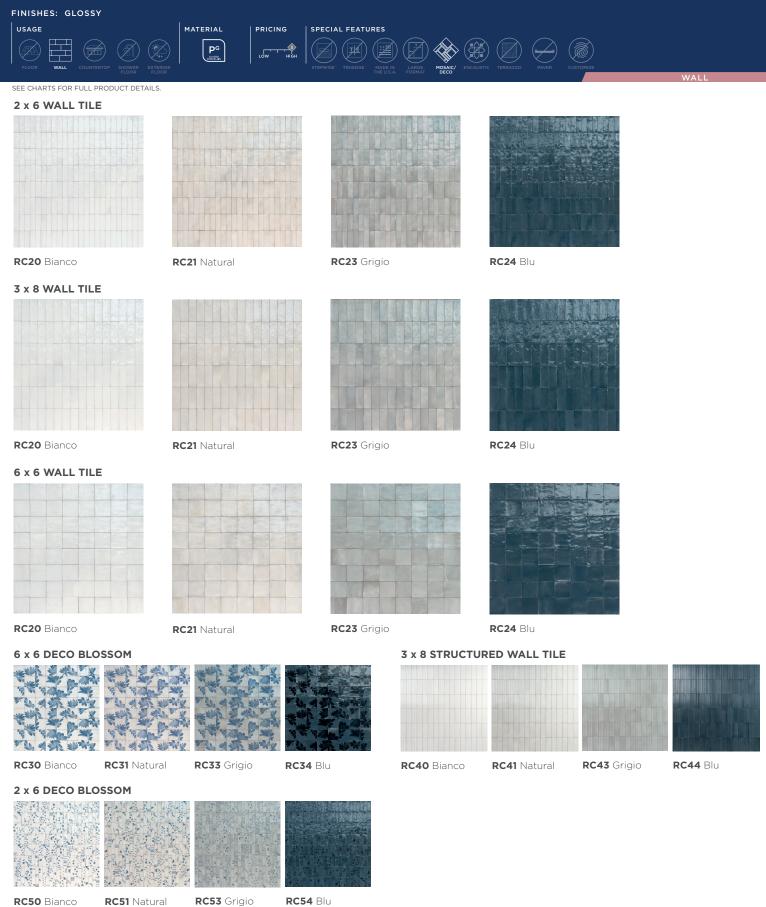

9



MARAZZ DARE TO BE BOLD

WALL

FINISHES: GLOSSY



SEE CHARTS FOR FULL PRODUCT DETAILS.

SIZES

		Thickness	Sq. Ft./ Carton	Pieces/ Carton
6 × 6 Wall Tile	5-7/8" x 5-7/8" (15.00 cm x 15.00 cm)	3/8"	7.27	30
6 x 6 Wall Tile Deco	5-7/8" x 5-7/8" (15.00 cm x 15.00 cm)	3/8"	7.27	30
3 x 8 Wall Tile	2-15/16" x 7-7/8" (7.50 cm x 20.00 cm)	3/8"	8.06	50
3 x 8 Structured Wall Tile	2-15/16" x 7-7/8" (7.50 cm x 20.00 cm)	1/2"	7.74	48
2 x 6 Wall Tile	1-15/16" x 5-7/8" (5.00 cm x 15.00 cm)	3/8"	8.74	108
2 x 6 Wall Tile Deco	1-15/16" x 5-7/8" (5.00 cm x 15.00 cm)	3/8"	8.74	108

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	
Countertops	N/A	
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit marazzitile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed

INSTALLATION

Grout Joint Recommendation	Shade Variation		
Wall Tile: 1/16" (When rectangular size is installed in a staggered brick-joint pattern, overlap should not exceed 33%.)	V2 Medium Variation		

PERFORMANCE CHARACTERISTICS

	ASTM#	Wall Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs
Scratch Hardness	MOHS	7.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: marazzitile.com/information/TestResults.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

For additional information refer to "Factors to Consider" at: marazzitile.com/Factors..

Use of a latex modified thin-set is recommended for installation. For more information, visit marazzitile.com.

FEATURES



 (\mathbf{R}) RECYCLED MATERIALS

REVEAL IMAGING®

All or select items within this series meet the requirements for these qualifications. For more information visit marazzitile.com.