


# SWIFT<sup>®</sup> tile™

STYLISH TILE MADE SIMPLE.



# PORCELAIN TILE INSTALLS TWICE



FEATURING

**CLIC-FIT**<sup>™</sup> Technology

AS FAST!\*

INSTALL IN **3** SIMPLE STEPS!

**1** **PLACE** UNDERLAYMENT  
■ NO MORTAR, SKIP THE MESS

**2** **CLICK** TOGETHER  
■ NO SPACERS, NO PROBLEM

**3** **GROUT** & GO  
■ NO WAIT TIME

- NO MORTAR REQUIRED
- JUST **CLICK** TILE TOGETHER
- INSTALL & GROUT THE **SAME DAY** – NO RETURN TRIP
- **EASY TO REMOVE** FOR REPAIR
- **CONSISTENT** ALIGNMENT & NO LIPPAGE

- **INSTALLS OVER** MANY EXISTING FLOORING SURFACES
- SIMPLE TEAR OUT TO **UPDATE**
- PERFECT FOR SECOND STORY FLOORS – **REDUCED SOUND TRANSMISSION**
- **NO ACCLIMATION** REQUIRED\*



SLIP RESISTANT



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT



FIRE RESISTANT



SIMPLICLEAN<sup>™</sup>

VISIT [SWIFTTILE.COM](http://SWIFTTILE.COM) FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

\*When compared to installing 300 sq ft., 12 x 24 porcelain tile with a three-man crew using typical trade installation practices and tools, and a 3-hour rapid dry mortar cure.


\*Does not require acclimation if stored and installed in non-freezing temperatures. See installation instructions for full details.






## STONE LOOK

MATTE FINISH

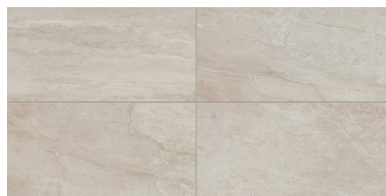

HONOR SW45

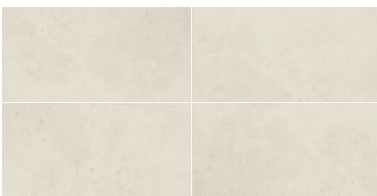

WINDSOR SW44

## MARBLE LOOK

MATTE & POLISHED FINISH




ELEGANCE SW50




STELLA SW51

## CONCRETE LOOK

MATTE FINISH

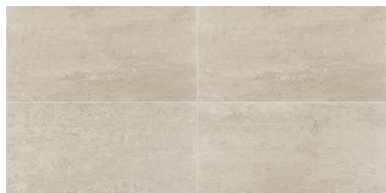

DESERT SW46

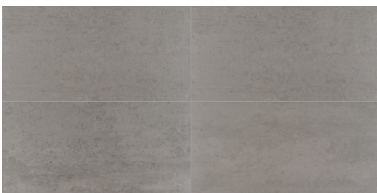

WOOL SW47



IRON SW48



CARBON SW49

## WOOD LOOK

MATTE FINISH



VINTAGE SW43



PRIME SW42



BARREL SW40



COBBLE SW41

# STYLISH TILE. SIMPLE INSTALLATION.

Start smart with these approved accessories!

1

### RAPIDPREP™ UNDERLAYMENT\*

THE PERFECT SUPPORT FOR YOUR FLOOR.

2

### CLIC-FIT™ INSTALL KIT

ALL THE TOOLS YOU NEED TO CLICK YOUR TILE TOGETHER.

3

### RAPIDGROUT™\*

A FLEXIBLE, SINGLE-COMPONENT GROUT DESIGNED FOR TILE WITH CLICFIT TECHNOLOGY.

\* REQUIRED FOR INSTALLATION TO COMPLY WITH WARRANTY.

## RAPIDGROUT® SELECTIONS



ULTRA WHITE  
D152



DOVETAIL  
D196



METROPOLITAN  
D195



COASTAL GRAY  
D160



HIGHLAND  
PEARL D145



WHISPER BEIGE  
D189



SAND DUNE  
D197



BRIARWOOD  
D199



PEWTER BROWN  
D283





GREY MIST  
D198

† We do our best to accurately portray our grout colors in print. However, due to limitations in printing, the colors shown here are close approximations to the real grout colors. We advise making final color decisions based on actual grout.





## SIZES

			Grout Joint	Thickness	Sq. Ft./ Carton	Pieces/ Carton
	6 x 36 Floor Tile▶	5-7/8" x 35-3/8" (15.00 cm x 89.80 cm)	1/8"	1/2"	10.15	7
	12 x 24 Floor Tile^	11-3/4" x 23-1/2" (29.86 cm x 59.74 cm)	1/8"	1/2"	9.60	5

▶Wood Look | ^Marble, Stone & Concrete Looks

## APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	
Wet & Level – Interior Floor	≥ 0.42	 *
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	
Countertops	N/A	
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit [www.tileusa.com/DCOF](http://www.tileusa.com/DCOF).

\* Does not apply to SW50 and SW51 polished tile.

## PERFORMANCE CHARACTERISTICS

	ASTM#	Matte Result	Polished Result
Water Absorption	C373	< 0.5%	< 0.5%
Breaking Strength	C648	> 475 lbs	> 475 lbs
Scratch Hardness	MOHS	8.0	6.0
Chemical Resistance	C650	Resistant	Resistant

Swift Tile features greater breaking strength and impact resistance than conventional porcelain tile.




## DURABILITY

Floor Surface Wear Resistance		
1 Residential Bathrooms	③	All Residential / Light Commercial
2 All Residential Areas	4	All Residential / Commercial

## ACCESSORIES





For best results and warranty compliance, use of approved underlayment and grout are required. Available wherever Swift Tile is sold. See installation instructions for more information.

## INSTALLATION – 6 x 36 WOOD LOOK

Pattern Recommendation*	Shade Variation
Floor 6 x 36: 33% Offset 	 High (V3) SW41, SW42, SW43
	 Random (V4) SW40

\* Straight grid installation is not approved for Swift Tile.

## INSTALLATION – 12 x 24 STONE, MARBLE & CONCRETE LOOKS

Pattern Recommendation*	Shade Variation
Floor 12 x 24: 33% Offset / 50% Offset 	 Medium (V2) SW46, SW47
	 High (V3) SW44, SW48, SW49, SW50, SW51
	 Random (V4) SW45

\* Straight grid installation is not approved for Swift Tile.

## NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

Random visuals enhance the natural beauty of this product. To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please see installation instructions.

Manufacturer Advisory: All tile is measured by the DCOF AcuTest™ method. Tiles with DCOF values <0.42 are not recommended for use in areas with wet or slippery conditions. For more information, see ANSI standard A137.1 section 6.2.2.1.10, available at [www.tileusa.com](http://www.tileusa.com).

For more information, visit [www.SwiftTile.com](http://www.SwiftTile.com).



**PRE-CONSUMER RECYCLED MATERIALS†**



**TRU-EDGE™**



**MADE IN THE U.S.A WITH IMPORTED MATERIAL**



**REVEAL IMAGING®**

All or select items within this series meet the requirements for these qualifications. For more information, visit [www.SwiftTile.com](http://www.SwiftTile.com).

† Tile component only



**Need help with installation?**

For quick tips from our Expert Installation Team

Call 1-855-527-CLIC (2542)

or

Visit us online at [www.SwiftTile.com](http://www.SwiftTile.com)



For warranty details, visit [www.SwiftTile.com](http://www.SwiftTile.com).



†Tile component only

7834 C.F. Hawn Freeway  
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Swift Tile® products and information, visit our website at [www.SwiftTile.com](http://www.SwiftTile.com).



©2020 Swift Tile (9/20)