

# **REVALIA**™ **REMIX**

GLAZED CERAMIC

# Take Shape

Play with the whimsical shapes and colors offered in Revalia™ Remix. This ceramic mosaic and wall tile collection is full of geometric shapes and eclectic colors. From fan mosaics to kaleidoscope mosaics, Revalia™ Remix will add structural dimension to any design.

- GEOMETRIC DESIGNS
  - Ceramic mosaics offered in unique figures like kaleidoscope and fan shapes
  - Ripple, Bevel, Picket and Structural shapes add a linear design
- ECLECTIC COLOR SELECTION
  - Vibrant colors offered in select shapes
  - Neutral color selections in white, beige and grey

### WALL

USAGI









































PRODUCT DETAILS

( SIZES:







6 x 6 Kaleidoscope Mosaic





FINISHES: MATTE | GLOSSY

### 2 x 8 RIPPLE WALL TILE



WHITE RV05 - MATTE



GRAY RV07 - GLOSSY

## 2 x 6 BEVEL CRACKLE MOSAIC




CENTENNIAL WHITE RV08 - GLOSSY



JUBILEE BEIGE RV10 - GLOSSY



FESTIVE GRAY RV09 - GLOSSY



CELEBRATION TEAL RV11 - GLOSSY












GLAZED CERAMIC


## 1 x 4 PICKET MOSAIC








PEACEFUL BLEND RV14 - GLOSSY



HOT SPRING BLEND RV15 - GLOSSY


## 6 x 6 KALEIDOSCOPE MOSAIC

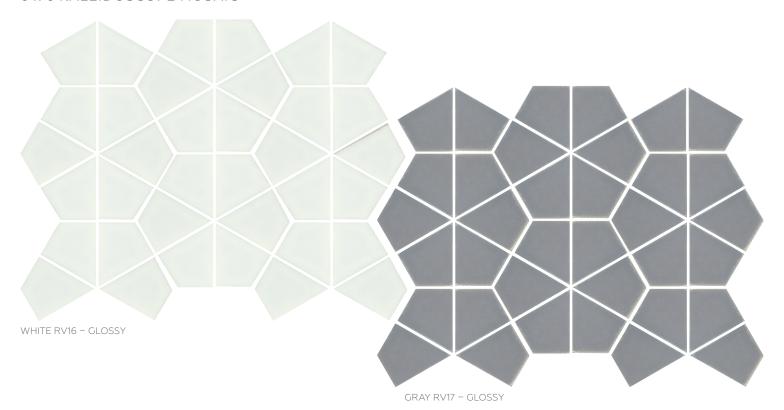


## 3 x 4 STRUCTURAL MOSAIC




WHITE RV18 - MATTE



MOSS RV19 - GLOSSY




SAGE GREEN RV20 - GLOSSY




BRILLIANT BLUE RV21 - GLOSSY




SPICE RV22 - GLOSSY



RED RV23 - GLOSSY



MUSTARD RV24 - GLOSSY



METALLIC GRAY RV25 - GLOSSY

## 3" FAN MOSAIC



FELICITY WHITE RV26 - GLOSSY



GRACEFUL GREIGE RV27 – GLOSSY




DELIGHTFUL TAN RV28 - GLOSSY



EXQUISITE SKY RV29 -GLOSSY



SUBLIME GRAY RV30 -GLOSSY



CHARMING PEACH RV31 -GLOSSY



RADIANT BLUE RV33 – GLOSSY

## **REVALIA**<sup>™</sup> **REMIX**

GLAZED CERAMIC

### SIZES

		Thickness	Sq. Ft./ Carton	Pieces/ Carton
2 x 8 Ripple Wall Tile	(2-1/8" x 8-9/16") (5.45 cm x 21.82 cm)	5/16"	10.40	80
2 x 6 Bevel Mosaic	(15" x 12-1/2" Sheet) (38.10 cm x 31.75cm Sheet) Mesh-mounted	3/8"	10.30	10
1 x 4 Picket Mosaic	(12-1/2" x 11-1/2" Sheet) (31.75 cm x 29.21 cm Sheet) 3/8" Mesh-mounted		9.40	10
6 x 6 Kaleidoscope Mosaic	(12" x 15" Sheet) (30.48 cm x 38.10 cm Sheet) Mesh-mounted	1/4"	10.00	10
3 x 4 Structural Mosaic	(15-5/8" x 11-3/4" Sheet) (39.67 cm x 29.84 cm Sheet) Mesh-mounted	5/16"	10.40	8
3" Fan Mosaic	(13-3/4" x 13-1/2" Sheet) (34.93 cm x 34.29 cm Sheet) Mesh-mounted	1/4"	10.20	10

### **APPLICATIONS**

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	<b>✓</b>
Countertops	N/A	
Pool Linings	N/A	<b>*</b>

A DCOF value of  $\geq$ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest $^{\text{TM}}$ , visit daltile.com/DCOF.

### INSTALLATION

Grout Joint Recommendation	Shade Variation		
2 x 8 Wall Tile: 1/16" (when rectangular size is used in a staggered brick-joint pattern, overlap	Medium (V2) Picket (Solids) Kaleidoscope Structural Fan		
should not exceed 33%)	High (V3)		
Mosaic: 1/8"	Ripple Bevel		
<b>3" Fan Mosaic:</b> 1/16"	bevet		
5 Furriosale. 1/10	Random (V4) Picket (Blends)		

### NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

Random visuals enhance the natural beauty of this product. To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

### APPLICATION NOTES:

Picket, Ripple, Kaleidoscope and Fan suitable for exterior applications in non-freezing climates only when proper installation methods are followed.

Bevel and Structural not recommended for exterior applications.

## For 2 x 6 Bevel Crackle Only:

## CAUTION

- Crackle tiles must be sealed with a penetrating sealer prior to grouting.
- Periodic resealing of crackle tile is required.
- Wall installation only where tile will not come into contact with staining agents including food.
- Not recommended for wet areas, countertops or floors.

### PERFORMANCE CHARACTERISTICS

	ASTM#	2 x 8 Ripple Wall Tile Result	2 x 6 Bevel Mosaic Result	1 x 4 Picket Mosaic Result	6 x 6 Kaleidoscope Mosaic Result	3 x 4 Structural Mosaic Result	3" Fan Mosaic Result
Water Absorption	C373	< 20%	< 20%	< 3.0%	< 3.0%	< 3.0%	< 3.0%
Breaking Strength	C648	120 - 230 lbs	120 - 230 lbs	> 250 lbs	> 250 lbs	> 250 lbs	> 250 lbs
Scratch Hardness	MOHS	4.0 - 6.0	4.0 - 6.0	4.0 - 6.0	4.0 - 6.0	4.0 - 6.0	4.0 - 6.0
Chemical Resistance	C650	Resistant	Resistant	Resistant	Resistant	Resistant	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.





7834 C.F. Hawn Freeway, Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at daltile.com.



<sup>\*</sup> Kaleidoscope and Fan mosaics only